ARMOR WITH AIR GENERATING EQUIPMENT FOR DEEP SEA DIVING.

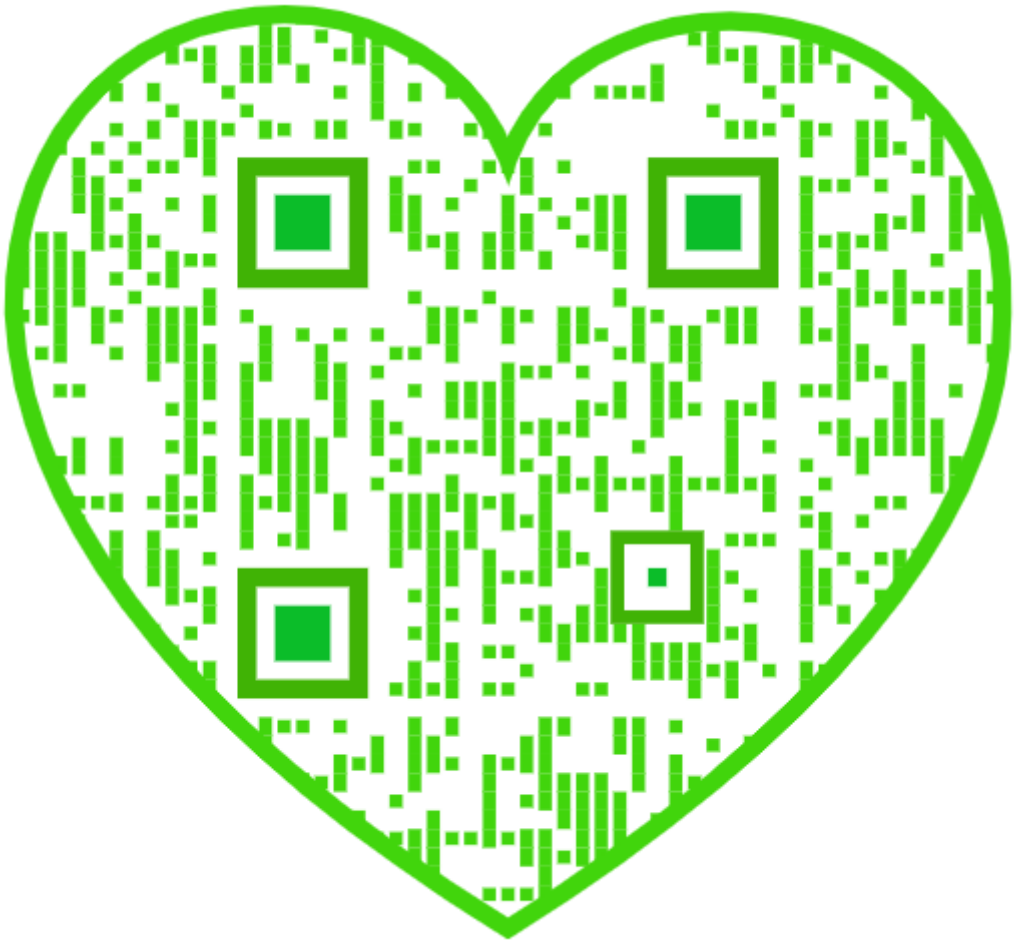

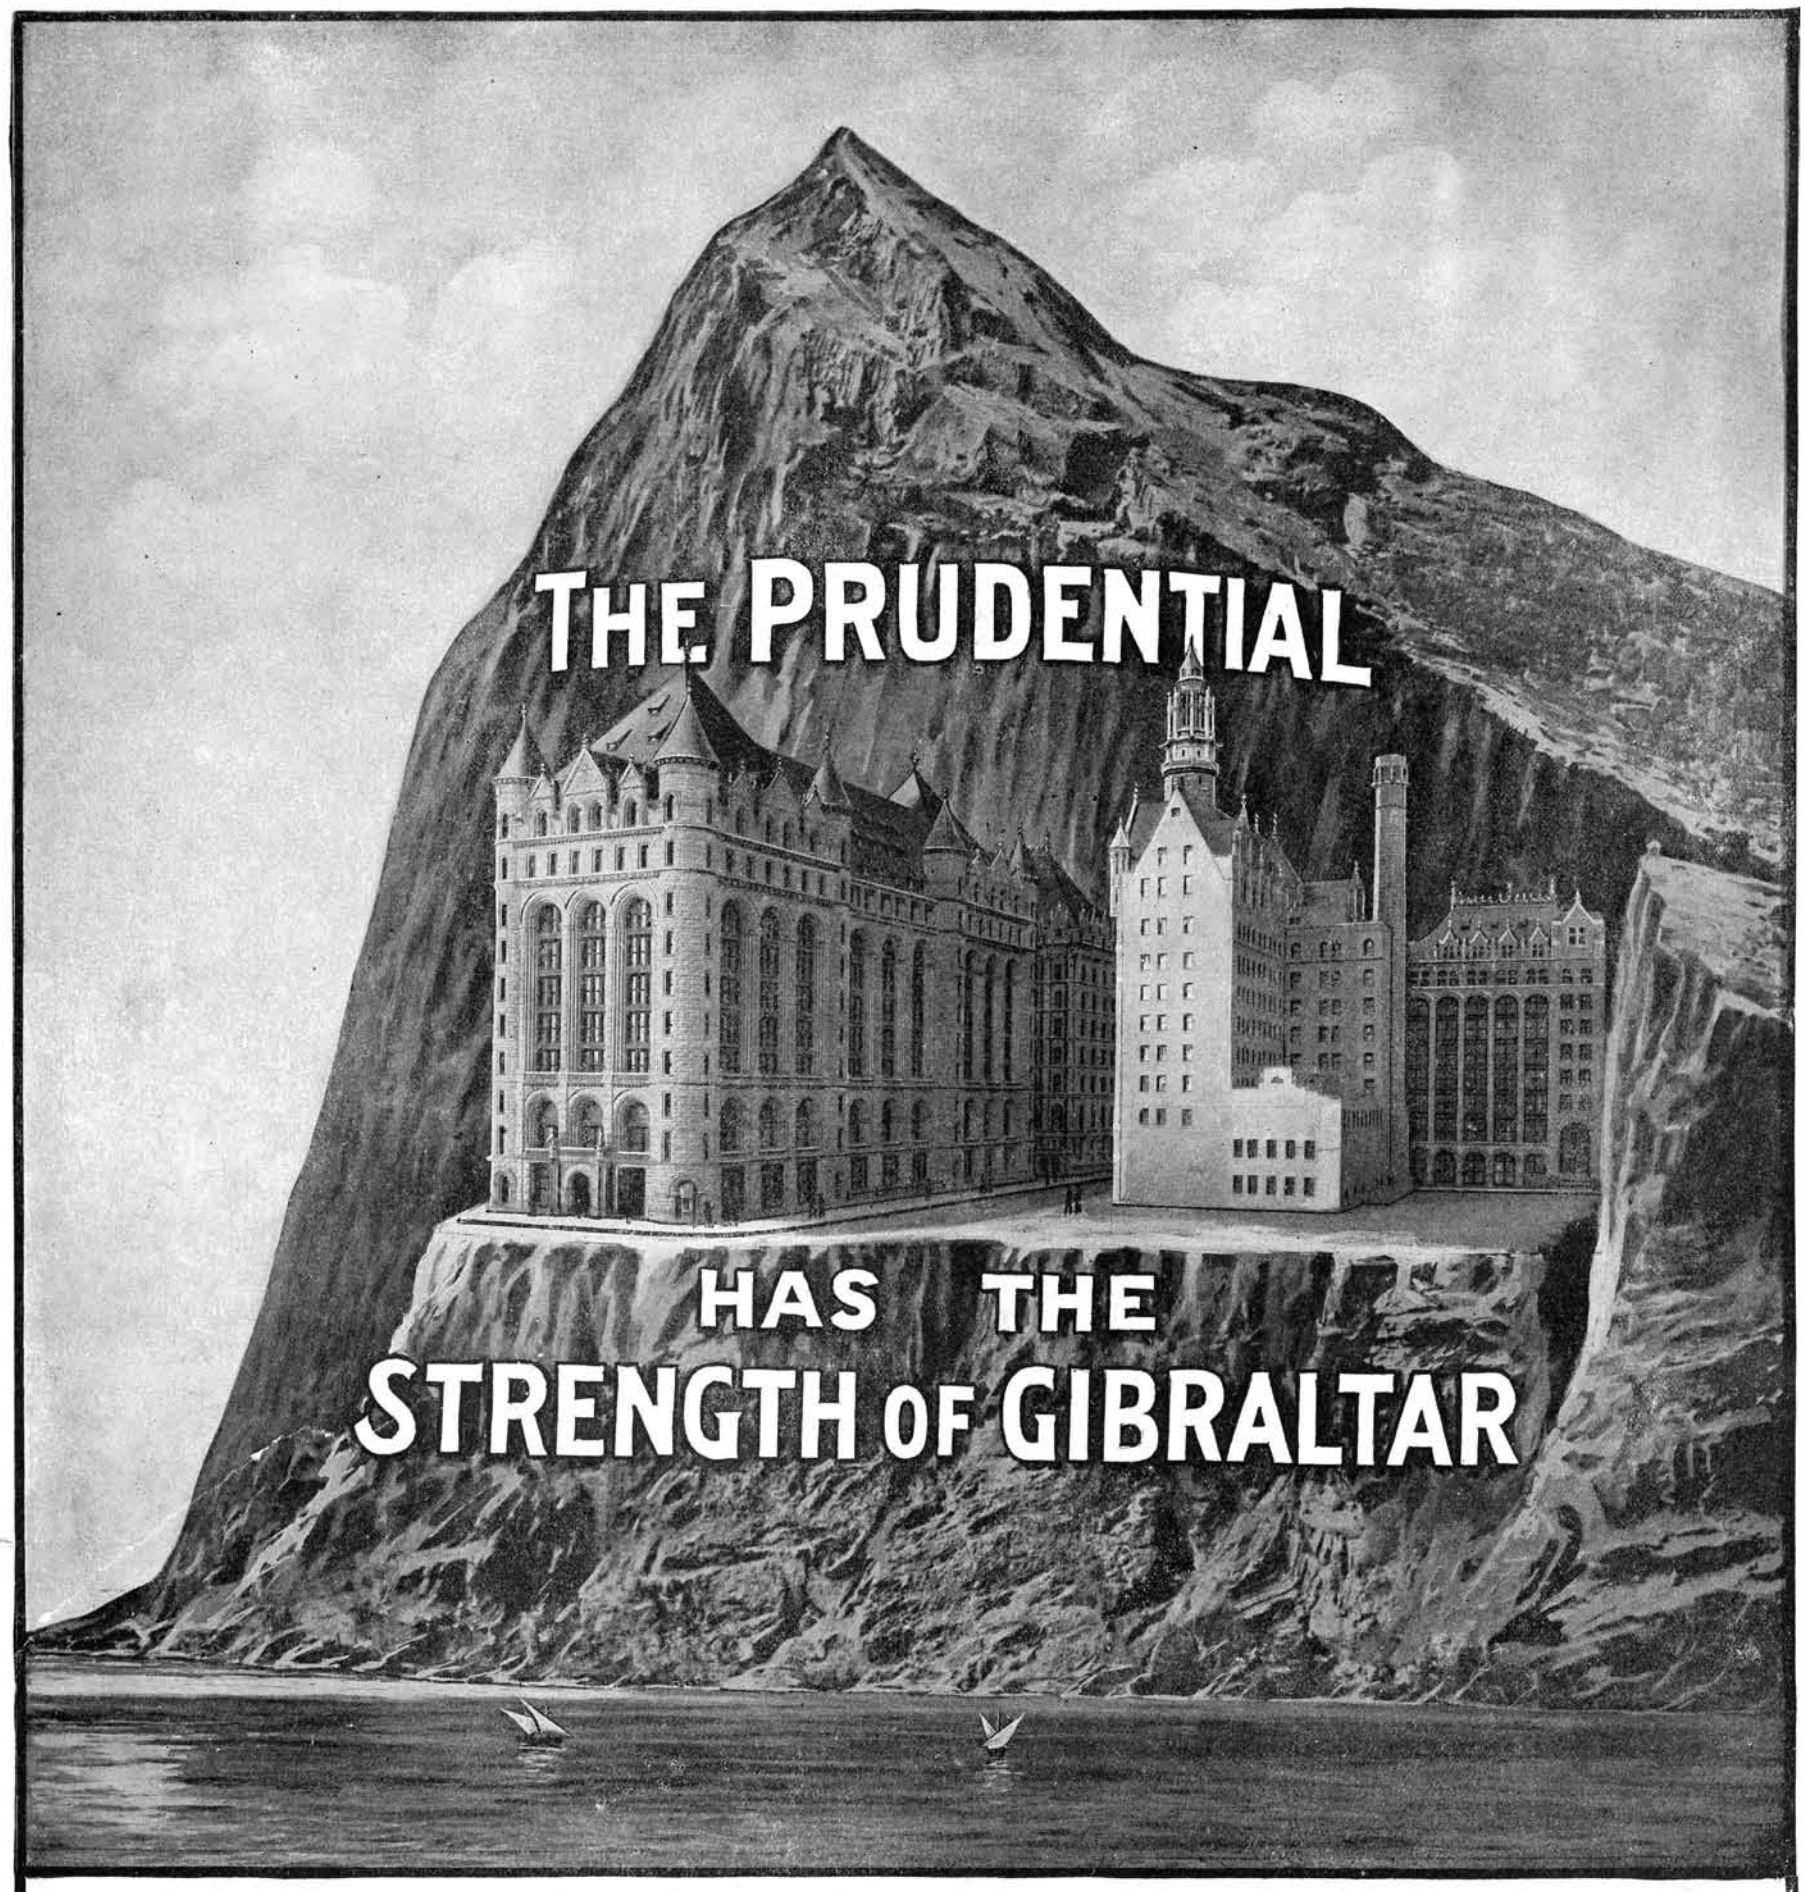

The House Founded On A Rock

Shall stand. Build your fortunes on the rock foundation of Life Insurance. It has shielded thousands from want, educated thousands of young men and women, and started them in business. Write to-day for information of Policies, with Rates and Benefits at your age. Address Dept. 121.

The Prudential Insurance Company of America

Incorporated as a Stock Company by the State of New Jersey.

JOHN F. DRYDEN, President **HOME OFFICE: Newark, N. J.**

The buildings pictured above are owned and occupied by The Prudential Insurance Company of America, as its Home Office at Newark, N. J. The extensive business of The Prudential requires in these home office buildings alone, the services of over two thousand employees.

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1906, by Munn & Co.]

Vol. XCV.—No. 23. ESTABLISHED 1845. | NEW YORK, DECEMBER 8, 1906. | 10 CENTS A COPY $3.00 A YEAR.

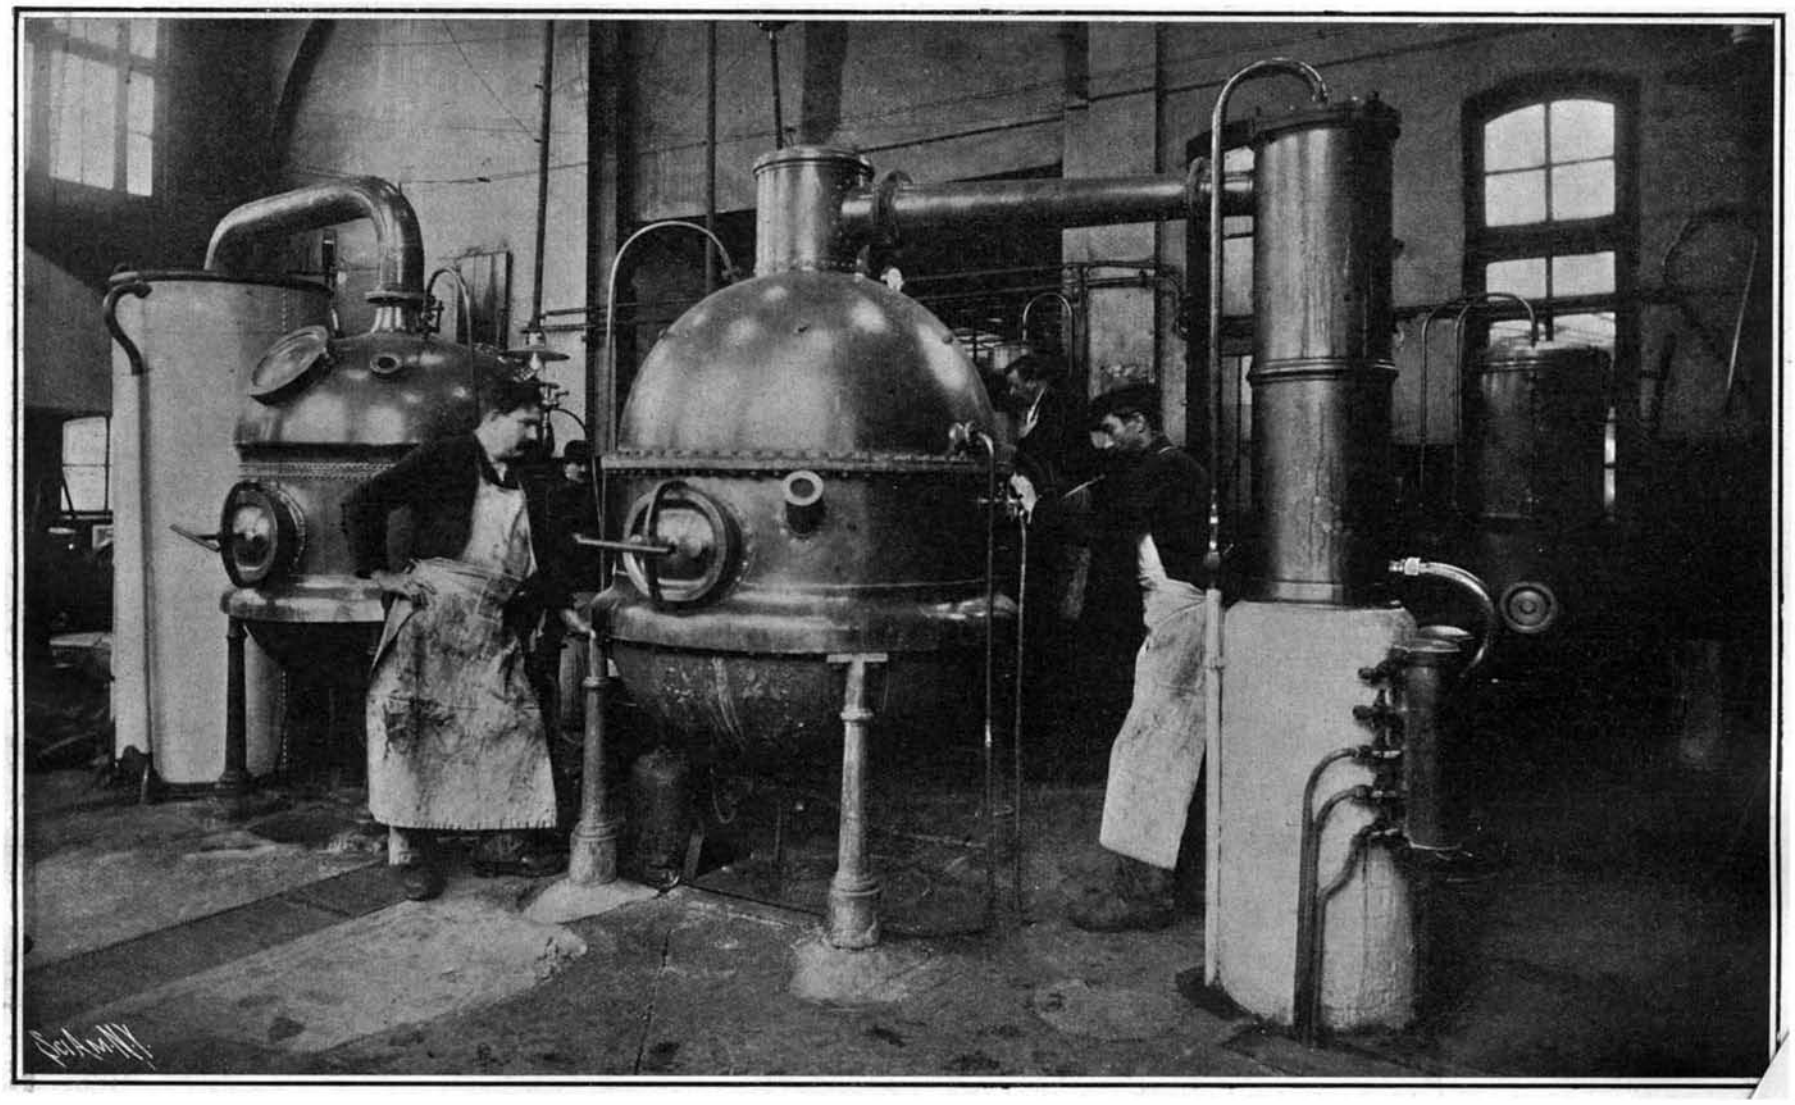

Fig. 1.—Extraction of Peruvian Bark Alkaloids by Hot Petroleum in Vacuo.

Fig. 7.—Making Gelatine Capsules.

THE PHARMACEUTICAL INDUSTRY OF FRANCE.—[See page 420.]

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO. - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year, for the United States, Canada, or Mexico.....$3.00
One copy, one year, to any foreign country, postage prepaid, £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS

Scientific American (Established 1845) .....$3.00 a year
Scientific American Supplement (Established 1876)..... 5.00 "
American Homes and Gardens..... 3.00 "
Scientific American Export Edition (Established 1878)..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.

MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, DECEMBER 8, 1906.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

BRIDGING THE HUDSON RIVER.

Since the failure of the Pennsylvania Railroad and other companies, that have their terminals in Jersey City, to build the great Hudson River bridge, of which so much was heard and written in the early nineties, the subject of bridging this river has dropped entirely out of sight. During the past year, however, the question of building a highway bridge across the Hudson has been the subject of consideration by a joint commission of the States of New York and New Jersey. This committee has recently completed its investigations, and will shortly present its report.

The original proposition for bridging the Hudson contemplated the construction of a colossal railroad bridge with a capacity for fourteen railroad tracks on two decks; and had this structure been built as originally planned, and at the original date proposed, it would have solved at a single stroke the problem of direct railroad communication between Manhattan Island and the West, and it would have done so for about one-fourth of what it will now cost to construct the same number of tracks in separate tunnels beneath the Hudson River.

It has never been generally understood how near this great enterprise came to being actually put through. Had it not been for the parsimony shown by the lesser railroads when it came to the final question of distribution of cost, the bridge would have been built. It was the endeavor of these roads to force the Pennsylvania Company to carry the burden of construction practically alone, that led the president to abandon at the last minute the scheme for the construction of a bridge and order the construction of tunnels exclusively for the use of the company. At that time real estate did not command the high prices which it does to-day; there was not so great a demand for structural steel; nor was labor so scarce or so highly paid. The combined railroads would have secured fourteen tracks into New York city for a cost, including terminals, which was estimated at $60,000,000, and certainly would not have exceeded $100,000,000. Two years from to-day, the Pennsylvania Railroad, after spending $100,000,000, will find itself limited to two tracks for communication with Manhattan and Long Island; and the other railroads will have no connecting tracks whatever.

Because of the great increase in the value of real estate, and in view of the very proper prejudice of the citizens of New York against the construction of viaducts and elevated railways within the city, it would be impossible either to secure the necessary permission for such a bridge, or interest the enormous capital that would be required for its construction. The city has wisely made up its mind to place all future railways and terminal stations as far as possible below ground, at least in the lower and business sections of Manhattan. On the other hand, if the site for a railroad bridge were found at the upper end of the island, where real estate would be cheaper and the objections to a great terminal station would not be so many, the station would be too far removed from the business centers to serve as a satisfactory city terminal.

The objections against a bridge over the Hudson designed for railway purposes disappear when the structure is designed simply as a connecting link between the highway systems of New York and New Jersey. The objections on the score of the excessive cost of the structure itself; of the enormous outlay for downtown real estate; and of the disfigurement of the city by the construction of elevated railways and terminal buildings, are no longer formidable. If the bridge were built primarily as a link between the public roads systems of the two States, there would be no necessity to locate it in the downtown district; and its Manhattan approach could very conveniently be made at street grade from the high level of the Washington Heights district. Here the bridge could be made to serve as a part of the fine system of boulevards and driveways which extends from Riverside Park into the Bronx and Westchester County; while on the New Jersey side connection would be easily made with that splendid system of roads for which New Jersey is justly famous.

The chairman of the joint commission of New York and New Jersey announced that they will not attempt definitely to fix any particular site for a bridge; but will merely suggest that it be built somewhere between 14th and 72d Streets. We are of the opinion that if the site of the first bridge is selected in the vicinity of 72d Street, its convenience and popularity would be such that there would be an early demand for a second bridge to accommodate the general vehicular traffic in the lower business section of the city.

SAFEGUARDS FOR THE PANAMA CANAL LOCKS.

The engineers of the Isthmian Canal Commission have recognized that the absolute safeguarding of the locks of the Panama Canal against destruction by steamship collision is one of the most vital problems in the whole of the canal enterprise. When the Commission announced its decision in favor of constructing a lock canal, in which the summit level was to consist of an inland sea held at an elevation of 85 feet and entered by three stupendous locks in flight, a storm of criticism was aroused against the plans on the ground that an accident might result in the carrying away of the locks, the emptying of the large high-level lake, and the wrecking of the whole enterprise. The most weighty criticism came from Mr. Hunter, the Chief Engineer of the Manchester Ship Canal, and a member of the consulting board, who drew attention to the fact that there had been several accidents on his own canal by collisions of steamships with lock gates which, for the time being, had tied up traffic on the whole canal.

During the past six months, or since the plans for a high-level lock canal were adopted, the Isthmian Canal Engineers have been giving very careful study to the question of safeguarding the locks, both against collision and against the disastrous effects which would ordinarily follow if one or more of the lock gates were carried away. Among the devices for preventing collision, which have been made the subject of study, the most promising is that calling for the provision in front of each pair of lock gates, and about 50 feet therefrom, of a pair of safety gates, which a vessel, entering the lock too quickly, would have to carry away before she could collide with the lock gates proper. The protection afforded by these gates would be twofold. In the first place, a vessel would exercise as great care to avoid hitting them, as if they were the actual gates that held the water in the lock, since collision with them would in any case result in serious damage to the ship itself. In the second place, these gates, because of their enormous structural strength and the great resistance which they would offer to an end-on blow, would suffice, even though they were carried away, to absorb the remaining momentum of the ship.

In addition to the gates, a system of control by means of powerful warping and snubbing devices is being developed, these latter being installed upon the massive concrete masonry which forms the side walls both of the entrances and the locks themselves. One method under consideration contemplates the use of powerful friction drums, working on the same principle as the friction drums used to ease the strain in towing during heavy weather at sea. Cables led from these drums, which would be securely held in the masonry, would be made fast to the ship, and as they unwound, each cable would exert a retarding pull on the ship of from five to ten tons. This control would be positive, and sufficient cables could be made fast aboard to give absolute control of the largest vessel.

The carrying away of a lock gate would be a calamity, not because of the value of the gate itself, but because its destruction would cause a rush of water that might sweep out the whole flight of locks and result in the loss of the whole 37 miles of summit level. Consequently, in addition to making provision, in the way of safety gates and elaborate braking devices, to prevent collisions with the gates, the Commission engineers are making a careful study of various devices by which, should the gates be broken down, a barrier could be interposed back of the gates at the entrance to the locks, which would close the entrance and hold back the water. There are three principal methods under consideration. First, the use of huge caisson cylinders, which could be floated across the lock entrance and close it in much the same way as the caisson gate closes a drydock; second, the use of an emergency swing bridge carrying vertical gates; and third, the use of a special type of hinged swinging gates.

If cylindrical caissons were used, they would be placed either horizontally or vertically. In the horizontal system a cylinder 46 feet in diameter, which is the depth of the water in the lock entrance, and slightly longer through its axis than the width of the entrance, would normally lie in a transverse sunken pocket, built transversely to the axis of the lock, and sufficiently deep to allow the cylinder to lie submerged below the 45-foot level. Should a lock gate be carried away, this cylinder would be rolled up out of its pocket on an inclined plane, until it rested upon the bottom, with its ends bearing against suitable shoulders built for this purpose in the side walls of the entrance. As the cylinder would be built with a diameter slightly greater than the depth of water in the entrance, it would serve to effectually close the channel and hold up the lake level until repairs had been effected. The rolling of the cylinder, which would be water-ballasted sufficiently to give it a slight margin of submergence weight, would be done by means of heavy cables passed around the ends of the drum and operated by powerful winches suitably placed on the shore. Another plan under consideration contemplates the use of two vertical cylinders which normally would stand in vertical pockets formed in the side walls of the entrance. Each cylinder would be slightly smaller in diameter than the width of the entrance so as to secure a slight resultant horizontal pressure when they close, and provision is made for swinging them out of their pockets until they meet at the center of the entrance channel, where they would form a barrier to the flow of water.

Another method contemplates the use of two vertical sectors of cylinders, hung on heavy pintles at the side walls of the entrance and normally swung back into pockets out of the way of the traffic. Should a vessel collide with a gate and be sunk in the channel, these gates would be swung shut until they met or closed against the sides of the sunken vessel. The advantage of this type of gate is that, as the resulting thrust is normal to the curved upstream faces of the gates there would be no destructive impact as they swung together in the face of the rush of water.

Another most effective method of holding back the lake would be the provision of a swinging bridge, mounted on a turntable, and corresponding, in its construction and operation, to the ordinary swing bridge over a navigable waterway. In case of accident, one arm of the bridge would be swung across the 100-foot opening of the entrance, until it brought up against an abutment formed in the opposite side wall. From the bottom of the arm, which would be a steel truss of great strength and rigidity, would project a series of vertical steel guide pockets, reaching down the full 45-foot depth of the entrance, and bearing on a bottom sill. In case of accident this arm would be swung across the entrance, and a series of steel curtains would be lowered until the flow of water was entirely shut off.

It will be seen from this outline of the studies which have been made of this problem, that the destruction of the lock gates would not necessarily involve the washing away of the whole flight of locks and the emptying of the summit level lake. The devices which we have above described are, it is true, of gigantic size, and would involve some careful planning both as to their construction and subsequent operation; but with the modern materials and appliances which the engineer has at his disposal, there is no inherent difficulty in these plans to prevent the satisfactory realization of one or other of them in practice.

AIRSHIPS IN THE FRENCH ARMY.

The French army seems to have taken the lead in the way of practical use of airships for military work, and will soon have two airships in actual service. It will be remembered that the first one of these, the "Lebaudy 1905," which made such a fine run from Moisson to Chalons, and a set of maneuvers at Toul, was turned over to the government by Messrs. Lebaudy, and the Minister of War had it stationed first at the Toul fortress and afterward at the Meudon establishment near Paris. It is proposed to use it especially in order to train the aerostatic personnel, and it will remain there for the instruction of the officers and men who are to form the first crews of the airships. Commandant Bouttieaux and Capts. Voyer and Bois, who followed last year's tests, are charged with the instruction of the men. The personnel will thus be well trained by the time the second airship "Lebaudy 1906" is delivered to the army. The new airship presents a great interest. M. Etienne, the Minister of War, having seen the value of the former airship during last year's maneuvers, decided to have a new balloon of the same kind built by Messrs. Lebaudy, and the new "Lebaudy 1906" is the development of the principles already applied with success by Engineer Julliot. Modifications over the type we have already described are made in some of the details. The envelope, still of rubber-treated canvas, measures nearly 200 feet long with a large diameter of 35 feet as before, and a volume of 4,000 cubic yards. A Panhard-Levassor 70-horse-power petrol motor is used now, and it gives much better results than the 20-horse-power form used on the first airship. All the mechanical parts are calculated accordingly, and a higher speed is looked for. Some changes have been made in the planes and the steering apparatus. As it is somewhat longer and thus has a greater vol-

ume, and the arrangements for ballast are improved, with a higher power, it should give even a better performance than the first, with a greater range of action. Most of the maneuvers are worked by automobile steering wheels placed near the pilot. The floor of the nacelle is of steel plate. While building at Moisson the construction has been kept secret for the most part. The most recent reports state that the new airship is now entirely finished, and it is filled up with gas by a corps of military aeronauts commanded by an officer. Then the first trials will be made on all the different parts so as to show what modifications may be needed. After these are made the final tests will take place, probably near the first of December. Then the Minister of War will take possession of the airship, as has been agreed upon, when it will have been put in perfect shape by Messrs. Lebaudy. It is to be known as the "Patrie," while the other will keep the name of "Lebaudy," and will be allotted to the fortified post of Verdun. Here will be established a well-fitted airship park which will be much more complete than the temporary one first set up at the Toul fortress. A third airship will no doubt be built, and will be called the "Republique."

NATIONAL ACADEMY OF SCIENCES.

BOSTON MEETING.

BY WILLIAM H. HALE.

The meeting of the National Academy of Sciences at Boston, November 20 to 22, was notable in several respects. A majority of all the members of the Academy were present; forty-three papers were presented, so that both in attendance and number of papers all previous records were broken; and also a new and interesting feature was added in the conversazione, which means, as they use the word here, not merely a social gathering, such as the conversazione to which the British Association for the Advancement of Science has long been accustomed, but a collection of most interesting and instructive exhibits showing the latest phases of scientific research in many departments. Boston may well claim to be the best place in the world to hold a scientific meeting, and the sessions were held in the most delightful environment possible—the new group of marble palaces just opened for the Harvard Medical College.

With so much of interest to describe and report, no exhaustive account is practicable. The topics presented cover a wide range, from the evolution of the universe to the measurement of waves of electrical energy of the wireless telegraph, of but one or two millionths of a second duration. A very curious and novel theory as to the extent and nature of the stellar system was advanced by Prof. George C. Comstock, to the effect that there is something which quenches light coming from the regions outside the milky way than from the milky way itself; hence, that the bright stars in the latter may not really be larger than the faint ones outside; the small apparent motion of these stars is due to the fact that they are drifting in the same general direction as our sun; and there is reason to believe that the universe is infinite.

Dr. George E. Hale exhibited photographs of the sun taken at the Carnegie Institution in California, and discussed solar spectra and their bearing on stellar evolution. Photographs taken by the incandescent calcium vapor at different heights surrounding sun spots show that the atmosphere is hotter in its lower and cooler in its higher strata. It is also found that the temperature of sun spots is so much cooler than that of the surrounding atmosphere as to allow elements elsewhere dissociated to combine, notably oxygen and titanium, as the spectrum shows the presence of oxide of titanium in the sun spots. A similar evolution has taken place in the stars.

Prof. William H. Pickering demonstrated by a gyroscope the solution of a problem which has long perplexed astronomers—why the tenth satellite of Saturn has a retrograde revolution. This is really the original direction of revolution, but the other satellites and all but one of the planets of the solar system have been caused to change the original direction by the friction of the annual tide which in the course of ages has caused the axis of our earth, as well as of the other planets and satellites to turn clear around, causing the rotation to be opposite to its original direction. By imitating this tidal friction—producing an artificial tide on the gyroscope—Prof. Pickering caused a similar inversion of the gyroscope.

Prof. Bailey Willis discussed heterogeneous elements of the North American continent, indicating that this continent has had five elevations and four submergences.

Prof. Henry F. Osborn spoke of the American tertiaries, pointing out seven different successive changes of fauna due to the making or severing connections with different continents, so that North America has in turn been stocked from South America, Africa, again South America, and finally Europe, giving us from the last the types now prevalent.

Prof. Charles S. Van Hise gave an explanation of the origin of the ores of the cobalt-silver district of Ontario—the Nipissing mine, etc. This is the first discovery of cobalt of any extent in America; the only other important cobalt mines are in Saxony. The wonderful richness of the Ontario mines of cobalt and silver is attributed to the fact that the veins were filled as a result of two and in some cases of three successive concentrations.

It was well worth a journey to Boston to hear Dr. Charles S. Minot discourse on the nature and causes of old age. He began by saying that a German philosopher who told a visitor in the course of a short visit all the system of philosophy which it had taken him a lifetime to work out was angry that his guest could not master in so short a time what it had taken him a lifetime to acquire. Dr. Minot expressed much the same feeling at being expected to explain in a few minutes what it had taken him as many years to discover. Senescence, as he explained it, begins even before birth. The percentage of growth of an infant in comparison with its whole body rapidly diminishes. Guinea pigs as soon as they recover from the shock of being born, grow at the rate of 5 per cent a day, but at the end of the first month this rate has fallen to 1 per cent a day. Rabbits are born in a less fully developed condition, and they grow 17 per cent for the male and 16 per cent for the female at birth, which decreases to 5 per cent after one month and to 1 per cent after two months. But the rate in growth is many fold greater before birth. On the ninth day, immediately after the segmentation of the ovum is complete, the fœtus increases in weight 1,000 per cent, but this rate rapidly decreases. On the eighteenth day, the cells have differentiated in the different organs, and they are seen to have a thin coating of protoplasm. The differentiation of the cells continues to progress and the amount of enveloping protoplasm to increase. These two kinds of change are all that Dr. Minot has been able to discover; in other words, they are all that we know as to the changes which accompany increasing age. It is these changes in cell structure, then, that continue to progress as age increases and which constitute growing old or senescence, so far as we know anything about it. The only period of rejuvenation is the brief time occupied by the segmentation of the ovum immediately after impregnation. Senescence, therefore, begins long before birth.

The Alpha and Omega of the programme was Alexander Graham Bell on aerodromics, his name occupying both the first and the last place. He read only one of the papers, however, in which he gave an historical account of the development of aerial navigation, and described the form of apparatus on which he is now experimenting in Nova Scotia. He said that the problem was really solved by Langley in 1896, when he constructed a machine which actually did fly, for Bell saw it. Langley's later and more elaborate machine was unduly discredited because it never was actually launched, and so it never had a fair chance.

The discouraging factor of aerodromics is the well-known mathematical formula that the sustaining surface of a machine increases only as the square of its dimension, whereas its weight increases as the cube. If, then, you build your large machine in the same form as a small and successful model, it soon becomes too heavy to rise at all. To meet this difficulty, Dr. Bell decided to fasten together many small supporting surfaces. By this means he could increase the supporting surface at just the same rate as the weight. The best units are tetrahedra, with two faces covered and one face and the base open. These are made about double the size of samples which he passed around; probably about eight inches long on each edge. His first thought was to connect a set of these by their corners and to alternate this construction with open spaces; but he found that it was practicable to build up large masses of these units compactly, giving a great supporting power, combined with strength and lightness. The edges are of aluminium. The structure constitutes a sort of kite, using that word as a suitably descriptive one, but of course not at all in the nature of the old-fashioned simple flying toy.

In order to avoid needless risk of life, he uses his structures on water or at slight elevations, and kept captive. He finds it practicable to go at as low a rate as ten miles an hour, instead of the kilometer a minute, nearly thirty-seven miles an hour, at which the Wright brothers operated their machine in Dayton, Ohio. Apparently this high rate of speed was necessary to keep the machine in the air. He found also very recently that he could move his machine against a rather brisk breeze for the reason that it is heavier than the air, and momentum is the combined product of weight and velocity.

On archeology, Prof. Charles P. Bowditch gave an extremely interesting account of the temples of the cross, of the foliated cross and of the sun at Palenque, Mexico, which showed a high degree of accuracy of knowledge as to periods of revolution of the earth and the planets Mars and Venus.

Ellsworth Huntington, who has recently returned from a tour of three thousand miles in Central Asia, presented evidence to prove that the climate of Chinese Turkestan has greatly increased in aridity in recent times. He showed photographs of villages inhabited from fifteen hundred to two thousand years ago, and necessarily requiring abundant supply of water, which were now in ruins, and very remote from water, in some cases as far as sixty miles.

Prof. Joseph Barrell showed how a comparison of sedimentary rocks over a continental area may enable us to discover what were climatic conditions in geologic ages. Periods of great rainfall were characterized by large areas of fresh-water sedimentation, and those of small rainfall by a greater proportion of marine deposits. The inclosed fossils indicate whether they were organisms of marine or of fresh-water life. He stated also that about one-tenth of the earth's present land surface is desert.

Dr. R. S. Woodward exhibited and explained a double suspension pendulum, devised especially in order to determine the rate of acceleration of the speed of a falling body. He avoids defects of previous pendulums, especially the knife-edge. His invention vibrates more steadily than the pendulums of the best astronomical clocks.

POINTS ABOUT NEEDLES.

BY H. R. CHRISTY.

One needle is a pretty small item, but the daily consumption of something like 3,000,000 needles all over the world makes a pretty big total. Every year the women of the United States break, lose, and use about 300,000,000 of these little instruments.

Our needles are the finished products of American ingenuity, skill and workmanship, and yet how many people, threading a needle or taking a stitch, have ever given a thought to the various processes through which the wire must pass ere it comes out a needle? The manufacture of a single needle includes some twenty-one or twenty-two different processes, as follows: Cutting the wire into lengths; straightening, by rubbing while heated; pointing the ends on grindstones; stamping impression for the eyes; grooving; eying, the eye being pierced by screw presses; splitting, threading the double needle by the eyes on short lengths of fine wire; filing, removing the "cheek" left on each side of the eye by stamping; breaking, separating the two needles on the one length of wire; heading, heads filed and smoothed to remove the burr left by stamping and breaking; hardening in oil, the needle is thus made brittle; tempering; picking, separating those crooked in hardening; straightening the crooked ones; scouring and polishing; bluing, softening the eyes by heat; drilling or cleaning out the sides of the eye; head-grinding; point-setting, or the final sharpening; final polishing; then papering, and finally, labeling. For wrapping, purple paper is used, because it prevents rusting.

There are many sorts and kinds of needles: First, there is the surgeon's grewsome outfit—the probing needle, made for tracking bullets or hidden cavities of pus; the hairlip needle, the long pins for pinning open wounds, the post-mortem needle of curious pattern. Some of these little instruments are thin, some are thick; others are long and straight; others, again, curve once, twice or three times. The veterinary surgeon has his special outfit also. The cook's needles are wonderfully, fearfully made. His larding needle is used to sew large pieces of meat together. The trussing needle is made on purpose to insert melted butter or sauce right into the vitals of a Christmas turkey. It is hollow, and has a large opening into which the sauce is poured. Nor less interesting are the needles which the upholsterer uses. Some are half curved, and some have round points. He has needles with curious eyes—long, round, egg, and counter-sunk eyes; the same kinds of needles are used by collar-makers. Then there are the delicate needles used by wig makers, glove makers, and weavers; these are often as fine as a hair. The glove needles are splendid specimens of skillful workmanship; the finest of them have three-cornered points. The great sail needle, which has to be pushed with a steel palm, would puzzle most people; so, too, the broom-maker's needle, which must also be pushed with a steel palm. The curious knitting-machine needle, with its latchet; the arrasene and crewel needles, and the needle for shirring machines; the weaver's pin for picking up broken threads, with an open eye in the hook. The long instrument used by milliners, the needle of the rag-baler, the knife-point ham needle used in the stock yards, the astrakhan needle—these and other varieties do not call for special notice.

The needle, as we see it to-day, is the evolved product of centuries of invention. In its primitive form it was made of bone, ivory, or wood. The making of Spanish needles was introduced into England during the reign of Queen Elizabeth. Point by point the manufacture has improved, until the little instrument is one of the highly-finished products of nineteenth century machinery and skill.

THE PHARMACEUTICAL INDUSTRY OF FRANCE.

BY JACQUES BOYER.

The pharmaceutical industry of France is now monopolized by a few large firms, which supply all the retail dealers. The accompanying photographs illustrate the operations of the largest of these establishments, in whose works, at Paris and at St. Denis, quinine and other medicines which are given in minute doses are made by hundredweights and tons. The modest apparatus of the old-fashioned apothecary would appear quite insignificant beside the gigantic vats in which sulphite of magnesia is crystallized, enormous retorts in which quinine and cocaine are purified, and the heavy pestles which are always grinding benzoate of soda in great mortars. For the raw materials which nature supplies to the pharmacist are seldom available for immediate use in medicine. They must be subjected to various manipulations in order to facilitate their administration—or, in other words, to gild the pill. Let us, then, examine the principal modern methods of preparing various *classes* of pharmaceutical products such as *espèces*, or simple mixtures of dried parts of plants, solutions, distillates, extracts, sweetened pastes, pills, granules, and *cachets*, pomades, ointments, plasters, and other remedies intended for external use.

The manufacture of *espèces* requires only mechanical operations without the addition of any reagent. In the large herbarium where woods, barks, etc., are stored, the freshly-gathered plants are spread out or hung up to dry and after complete desiccation are tied in bundles and labeled. When wanted for use they are comminuted in various ways—by shaving with planes (quassia, sandalwood); by triturating (Peruvian bark); by passing through fanning and grinding mills (flaxseed); by pulverizing in mortars with machine-driven pestles, arranged usually in batteries of four, eight, or ten; by grinding under millstones; and, finally, by sifting in order to give the powders the fineness prescribed by the "Codex."

The mortars are of cast iron and are mounted on stone bases and covered with leather hoods in order to prevent the powder from scattering. The millstones are of granite. "Medicated waters" and "spirits" are obtained by distillation. In the former water, in the latter alcohol is the vehicle of the medicinal principle. Both are made, in most cases, from vegetable substances, either fresh or dried, which are allowed to macerate for a period of from one to several days and are then put into a retort and distilled over a water bath. Sometimes the distillation is effected in a vacuum in order to lower the temperature of ebullition and prevent the decomposition of the essential oils.

As a typical example we may take the preparation of quinine, the invaluable febrifuge discovered by Pelletier and Caventou in 1820. Peruvian bark, the source of this alkaloid, is first broken up, pulverized, and sifted by machines and then, mixed with a certain proportion of lime, is heated with heavy petroleum oils *in vacuo* (Fig. 1). Usually, the oil required is pumped daily from a great tank, through underground pipes, to the apparatus, in order to avoid the accumulation of a large quantity of the inflammable hydrocarbons in the factory. Peruvian bark contains, besides quinine, another alkaloid, cinchonine. Both are dissolved and extracted by the hot petroleum which deposits them on cooling. They are separated by converting them into sulphates and crystallizing the mixed solutions in immense vats (Fig. 2). The sulphate of quinine crystallizes out, while the more soluble sulphate of cinchonine remains in solution in the mother liquor. The former is purified by successive crystallizations, after each of which it passes through a centrifugal machine which rapidly removes the adhering mother liquor. Finally, the pure sulphate of quinine is spread on trays covered with absorbent paper which are taken to the drying ovens. When completely desiccated it is packed in boxes or in bottles.

Solid extracts, dry or moist, are made by evaporating vegetable and animal infusions, more or less completely, in order to obtain the active principles of the drugs in comparatively small bulk. Although the discovery of alkaloids, acids, glucosides, and other definite chemical compounds in medicinal plants has diminished the importance of extracts, pans holding from 250 to 500 liters (70 to 140 gallons) each, and retorts, one of which has a capacity of 1,500 liters (413 gallons), are in constant use for the preparation of aqueous extracts of coca, kola, digitalis, and opium, alcoholic extracts of colchicum and hyoscyamus, and essential extracts of cantharides and male fern. The extracts

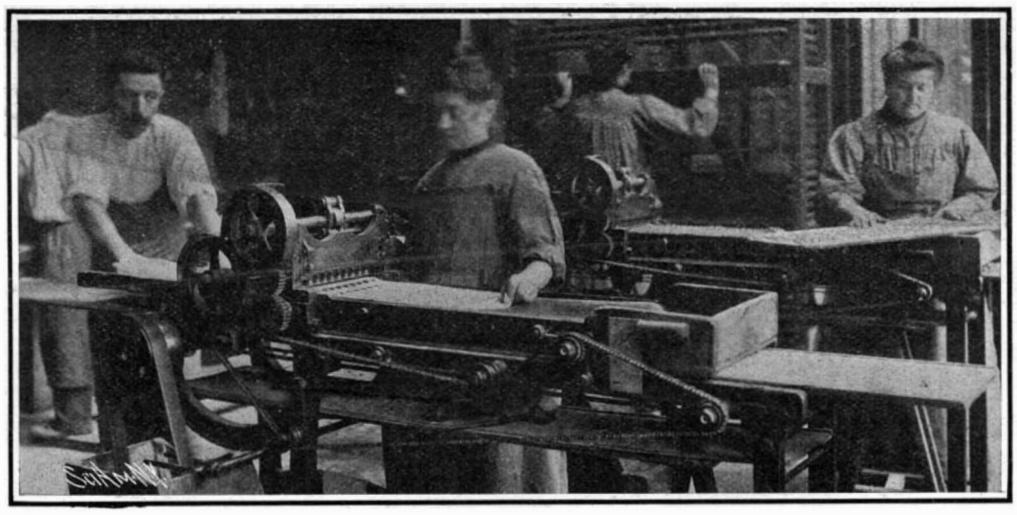

Fig. 8.—Cutting Out Pastilles by Machine.

Fig. 9.—Casting Marshmallows in Molds of Starch.

Fig. 10.—A Pill-Making Machine.

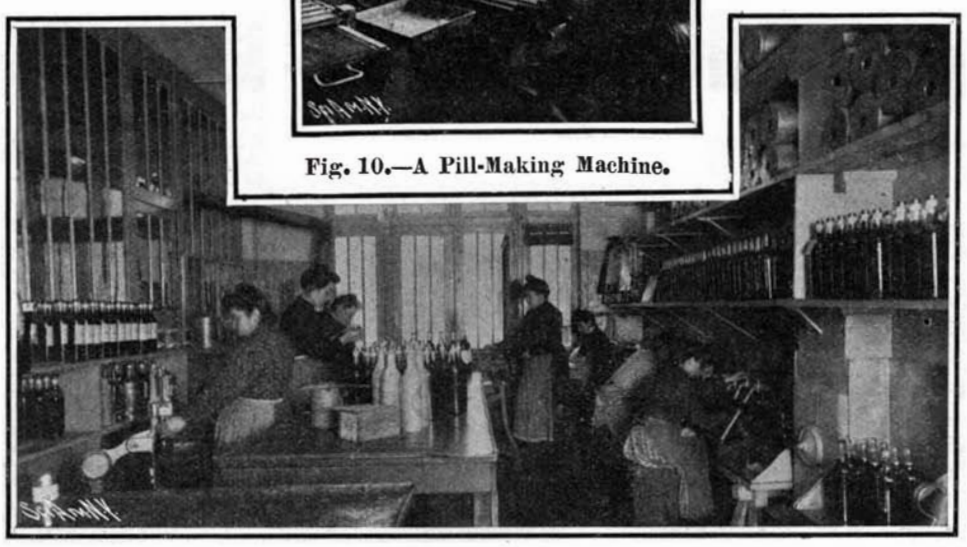

Fig. 11.—Bottling Cod-Liver Oil.

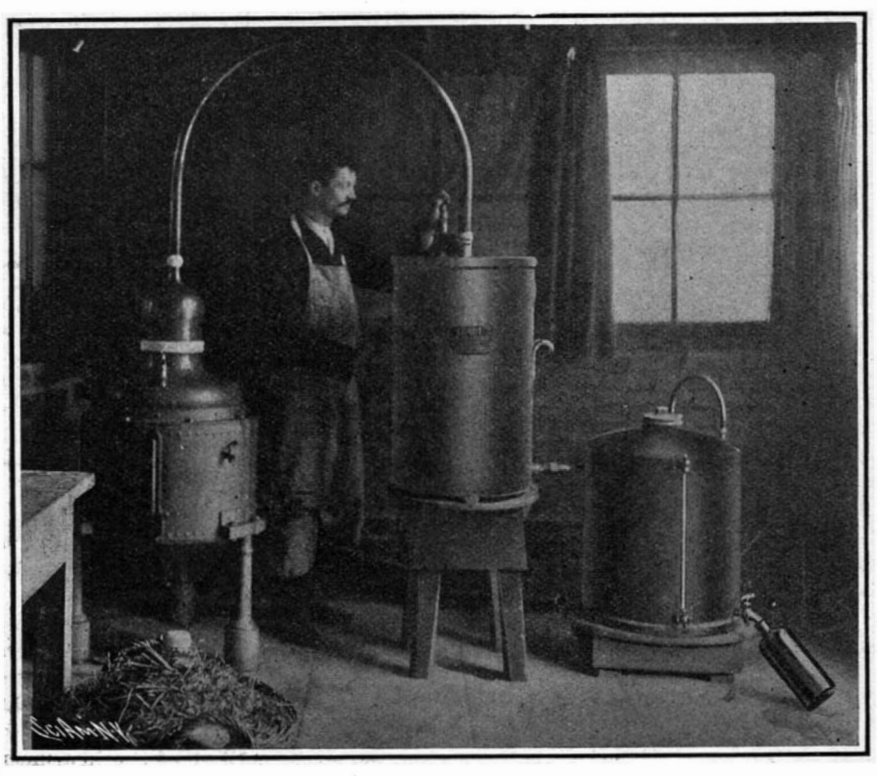

Fig. 5.—Distilling Chloroform.

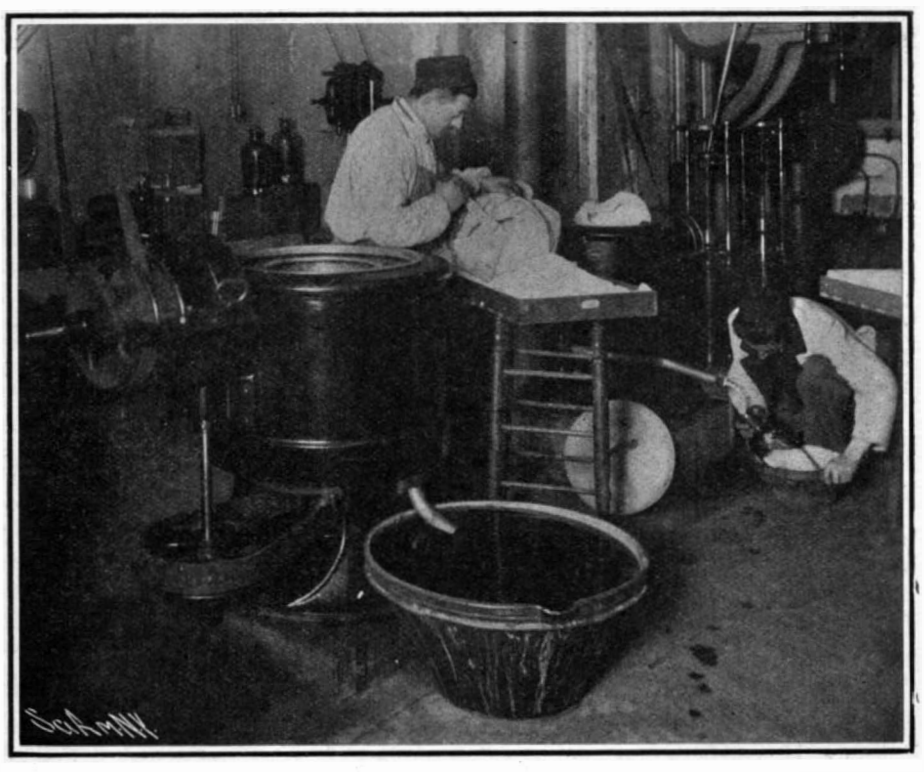

Fig. 6.—A Centrifugal Drying Machine for Cocaine.

THE PHARMACEUTICAL INDUSTRY OF FRANCE.

which are known as "robs" are obtained by the direct evaporation of the natural juices of certain plants, including lettuce, aconite, belladonna, and hemlock.

Some idea of the quantities in which certain medicines of mineral origin are produced may be gained by visiting the room devoted to the manufacture of kermes mineral (Fig. 3). Here we find twenty-five sheet-iron kettles, each of the capacity of 1,200 liters (330 gallons), which are connected by large pipes provided with stopcocks so that any kettle can be shut off from the rest at will. The kettles contain a mixture of sulphide of antimony, carbonate of soda, and water, which is boiled for an hour and then drawn off into evaporating pans of 5,000 liters (1,375 gallons) capacity. The liquid is filtered while hot. On cooling it deposits a light, velvety brown powder which, after being dried on wooden trays covered with paper, constitutes kermes, an expectorant which is given in doses of from 5 to 20 centigrammes (about 1 to 3 grains).

Near the kermes pavilion stands a kiln in which 5,000 or 6,000 kilogrammes (5 or 6 tons) of magnesia are calcined annually—enough to purge half a million persons. Twenty vats of 2,000 liters (550 gallons) capacity are used in washing the carbonate of magnesia which, formed into loaves, is dried on shelves in an immense oven or hot room (Fig. 4).

The solution of sulphate of magnesia is concentrated in steam-heated kettles of equally great size. Thence, the liquid flows, through wooden gutters, to the crystallizing pans, from which workmen shovel the beautiful white crystals. Eighty thousand kilos (80 tons) of sulphate of magnesia (Epsom salt) are produced annually at the St. Denis works.

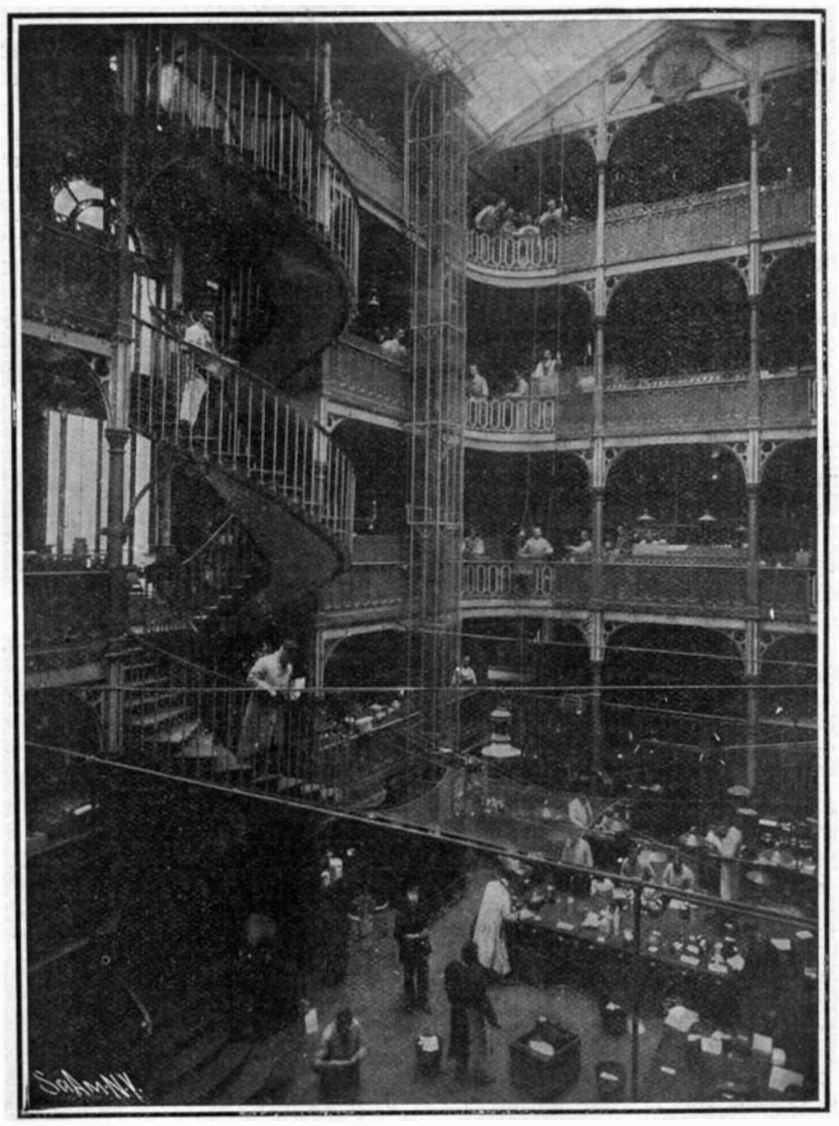

Fig. 12.—Sales Department of a Large French Drug House.

Chloroform occupies a special building, the windows of which are darkened by black curtains (Fig. 5). It is made by mixing, in a large retort, 10 kilos (22 pounds) of chloride of lime with 3 kilos (6.6 pounds) of lime slaked in 80 liters (22 gallons) water, adding 2 kilos (4.4 pounds) of alcohol and passing a current of steam through the mixture, which should occupy not more than one-third of the capacity of the retort. At about 80 deg. C. (176 deg. F.) the mass swells and disengages almost pure oxygen. At this moment the fire is extinguished and the distillation begins. As soon as the swelling has subsided an additional quantity of the same mixture is introduced and this process is repeated until the retort is full. The heating is then resumed, and a mixture of chloroform, water, and alcohol condenses in the worm, whence it flows into a metallic receiver. The chloroform, being heavier than the other liquids, is easily separated from them. It is then washed by shaking with water and carbonate of potash, again separated, and dried over calcium chloride. As the finished product must be very pure, to avoid the possibility of accidents in the course of surgical operations, the chloroform is rectified by shaking with sulphuric acid, washed with a solution of soda, thoroughly mixed with pure poppy oil and redistilled, the first and last portions of the distillate being rejected.

Modern surgeons use cocaine so much that, before leaving the anæsthetics, we will glance at the apparatus employed in the extraction of cocaine from the leaves of the coca plant. The infusion is filtered and precipitated by adding acetate of lead. The precipitate, after the excess of acetate of lead has been removed by sulphate of soda, is shaken with ether, which dissolves the cocaine. The alkaloid is then converted into a hydrochlorate which is recovered in a pure state by means of a centrifugal separator. In one of the illustrations (Fig. 6) a workman is shown removing the linen bag of precious crystalline flakes and spreading them on sheets of filter paper laid on wooden trays which will next go to the drying oven.

Now let us examine the various forms in which medicines of disagreeable taste and odor are conveniently administered. Long ago, bitter powders were disguised in unleavened bread, suitably moistened. About 1872 Limousin, a pharmacist of Paris, conceived the idea of inclosing powders in envelopes made of unleavened bread. These *cachets* are now made in a mold resembling a waffle iron and consisting of two iron plates marked with little depressions. Starch paste is introduced between the plates, which are heated by a gas furnace.

A similar purpose is served by gelatine capsules which, though not attacked by the medicine, dissolve in the digestive fluids. Into a solution of gelatine and gum, kept hot by a water bath, a girl dips a number of little olive-shaped iron forms, polished and oiled, which are attached by their stems to holes in a plate, which the operative turns to and fro in order to secure a uniform coating of the viscous fluid (Fig. 7). The mold is then removed from the bath and, as soon as the coating of gelatine has cooled and "set," it is taken to a drying room

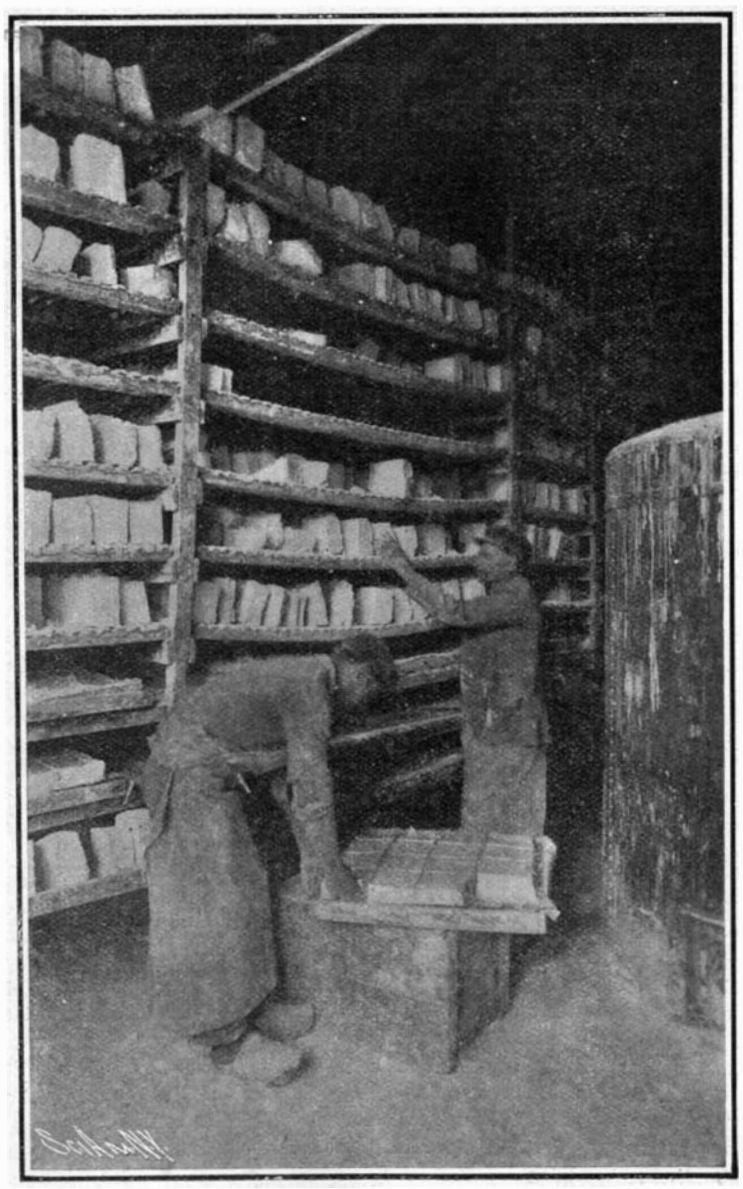

Fig. 4.—The Magnesia Drying Room.

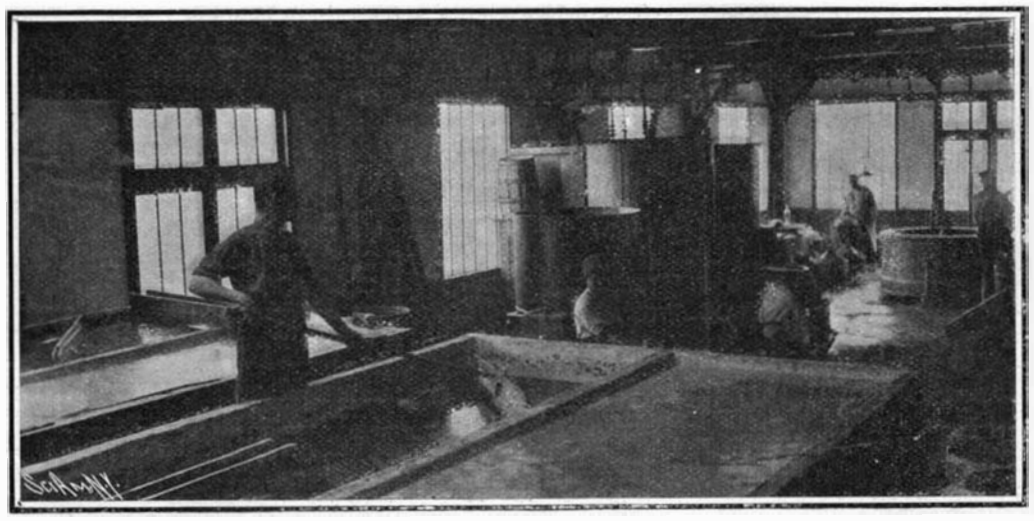

Fig. 2.—Crystallizing Salts of Quinine.

Fig. 3.—The Kermes Room.

THE PHARMACEUTICAL INDUSTRY OF FRANCE.

which is very gently heated. When the capsules are partly dry, but still elastic, they are removed from the forms and set, mouth upward, in little hemispherical depressions in wooden boards, each of which accommodates one hundred capsules.

Women now fill the capsules with liquid medicines by means of pointed pipettes or very fine tubes attached to reservoirs, opening and shutting the stopcock for each capsule. This operation appears very simple, but considerable dexterity is required to perform it without spilling the liquid. The filled capsules are then closed by brushing the orifices repeatedly with the hot solution of gelatine.

Another method, much used for ether, oil of turpentine and other very volatile substances, was invented by M. Thérenot. The liquid is poured between two sheets of gelatine which are then pressed together between two plates of metal marked by small and opposite indentations. The sheets of gelatine being welded together around the indentations, the result is a sheet of flattened beads, or pearls, filled with liquid, which are connected by their edges when they come from the mold, but are easily separated with the fingers.

Pastilles, troches, or lozenges are made by the ingenious apparatus which is shown in operation in Fig. 9. A paste, formed by mixing the medicine, in powder or solution, with sugar and gum tragacanth, is kneaded and rolled into a layer of the desired width and thickness. This is carried, by a moving apron, to and between the opposing punches of the pastille machine (Fig. 8). As the pastilles are cut out they are arranged in wooden trays which are placed on racks to allow the pastilles to dry. The scraps of paste are kneaded over and again passed through the machine. In this way are made the Vichy pastilles used in dyspepsia and the pastilles of kermes, sulphur and chlorate of potash, which are prescribed in bronchial affections.

Iceland moss and marshmallow pastes are made by adding the medicinal substance to melted sugar and slowly dropping the liquid mixture, from a dipper furnished with a spout, into peculiar molds (Fig. 9) in which they remain during their stay in the drying room. The molds are made by filling wooden boxes with fine dry starch and putting them under a press containing metal plungers, or forms, which make in the starch the cavities or molds into which the liquid paste is poured.

Pills are now made by machinery. The active ingredients are ground and mixed together in mortars by pestles formed of great wooden beams heavily shod with iron, which are moved by cams on a revolving shaft. Then, if the contents of the mortar, after being thoroughly ground and mixed, are pulverulent, glycerine, honey, syrup, a vegetable extract, or some other agglutinant is added to give the necessary consistence. If, on the contrary, the mass is liquid or very soft and wet, it is thickened by stirring in an inert powder such as licorice or marshmallow, which is called an excipient.

A stiff paste having been produced by either of these methods, it is rolled out into thin rods called "magdaleons." The pill-making machine (Fig. 10) consists essentially of two grooved plates, one of which, sliding over the other, divides the "magdaleons," which lie at right angles to the grooves, into approximately spherical pills.

The pills are perfected and tested by rolling them between a wooden disk and a metal plate and the perfect ones are kept in lycopodium powder to prevent them from adhering to each other.

Medicinal dragees are made by the process used by confectioners in making sugared almonds, the almond being replaced by a lump of stiff paste containing iron, mercury, anise, digitaline, atropine, or other medicine. The little medicated balls are put in a basin called a "shaker," which is heated and caused to vibrate. A thick solution of gum is added and then, slowly, a scented syrup. The dragees, polished smooth by mutual friction, become covered with a coating of sugar. They are whitened by sprinkling starch over them in the "shaker" and then go to the drying oven.

Leaving the confectionery department, let us visit the cellars in which oils, pomades, balsams, and ointments are prepared. Our attention is first attracted by fourteen round tanks of galvanized iron, each containing 1,200 liters (330 gallons) of cod liver oil which is poured into the tanks through holes in the floor of the building above. After remaining in these tanks for a time the oil is drawn off into great cemented cisterns, two of which have a capacity of 6,000 liters (1,650 gallons). From the cisterns it is pumped, as required, to the ground floor, where it passes through filters into a row of vats lined with zinc. From these it flows, through pipes that traverse the partition, to the adjacent bottling room shown in Fig. 11. Here the oil, which flows clear and limpid from a row of faucets over a zinc-covered table, is bottled, corked, capped, and labeled by girls. This rather unpleasant and repulsive work is done at St. Denis with the most scrupulous cleanliness, although the annual output of the establishment averages 150,000 kilogrammes (150 tons) of cod liver oil.

In other cellars ointments and pomades are made, by simple mixture, by solution, or by heating the active medicament with the fatty vehicle. The mixture is usually contained in a copper basin, which has a machine-driven stirrer and may or may not be heated over a water bath. The vehicle most commonly used is vaseline, which possesses the great merit of not becoming rancid.

Of other external remedies the most important are plasters, or cloths covered with an adhesive composition. The foundation generally used is unbleached muslin, which has a downy surface that adheres well to the plaster, but silk is also employed. The material is cut into strips 5 meters (5½ yards) long and 20 centimeters (8 inches) wide. On these the melted plaster is poured and distributed uniformly by passing the strips between two beveled scrapers, with their edges separated by a space equal to the desired thickness of the finished plaster. The coated strips, after drying in the air, are rolled up and packed in boxes.

A glance at the lavatory will complete our review of these pharmaceutical workshops. This is a large room with walls and floor of cement. The center of the room is occupied by cast-iron basins of a capacity of 600 liters (165 gallons), heated by steam. The waste pipes are stopped with plugs of copper. Machine-driven brushes of various forms, including bottle brushes, complete the equipment of the lavatory.

A word should be added about the sales department of the house with which this article deals. The department occupies the great hall of the Paris establishment (Fig. 12). The three galleries are connected with each other and the floor of the hall by electric elevators which stop automatically at each story. In addition, there is a powerful freight elevator which runs from the cellar to the roof.

To facilitate the rapid execution of orders, the establishment is divided into twenty departments, each of which has charge of a different class of goods and has its own separate organization, stores, and personnel, under the charge of a responsible chief. The departments of exotic drugs and rare products are located on the ground floor. In the first gallery are the chemical products and essential oils. The poison department occupies a room to which only persons engaged in that department are admitted. On the same floor is the department of galenic pharmacy. Plasters, health foods, antiseptics, medicinal confectionery, and various specialties occupy the second story, while the third contains the department of powders and the herbarium. The center of the ground floor is occupied by numerous clerks engaged in checking and transmitting orders. Here a very animated scene is presented during certain hours of the day. The lifts and elevators are continually bringing down parcels which, however, are not allowed to accumulate, but go as quickly as they come. It is a commercial hive of intense activity.

In order to eliminate every source of error in the quarter of a million orders that are filled annually—from 500 to 600 are received daily—every order, as it arrives, is copied on a sheet of paper the color of which indicates the method of forwarding (mail, freight, express, or export) and marked with a serial number which thenceforth serves to identify it. After being registered, the sheets go to the city clerk, who copies off the articles that are to be purchased from other houses. (These are brought to the hall and entered in the shipping register.) The colored order sheets then receive their shipping numbers and go to the ticket office, where clerks assigned to each of the twenty departments transcribe with manifolding pens the items that belong to that department. The stub of the ticket remains in the office. The other part goes to the proper department, from which it presently returns, attached by a drop of mucilage to the article ordered. The orders are now made up on tables divided into compartments which bear corresponding serial numbers. The checking clerk, as he inspects each article, detaches the ticket and places it in an envelope marked with the number of the order. The envelope then goes with the order to the packer, who again verifies each item at the moment of packing that particular article. This ingenious triple system of checks reduces the chances of error to a minimum and enables orders to be filled with accuracy and dispatch.

Motions in the Sidereal Structure.

BY PROF. EDGAR L. LARKIN.

All corpuscles—electrons—atoms, molecules, particles of interstellar dust, nebulæ, meteorites, uranoliths, comets, asteroids, moons, planets, and suns, move perpetually. In this note the motions of suns, vast masses, only will be considered. Suns are known to be moving in every possible direction, with varying but enormous velocities, for massive motion. In the present state of astronomy the ablest observers and mathematicians cannot detect any cause but gravitation. Many suns are coming toward the earth; while others are receding. These motions are those in the line of sight and can be detected in the telespectroscope only. Velocities of approach and recession are determined by computations based on wave-lengths of light. Other suns traverse paths that make angles with straight lines drawn from the earth to them. The angular displacement of these can be measured with telescope and micrometer, without the aid of the spectroscope. In cases where suns have a parallax large enough to be measured, these angular velocities may be translated into linear—to miles. The proper motions of suns are in every direction. Bees in a flying swarm move in all directions. The insects obey their wills. Suns obey universal gravitation.

Suppose all matter in existence to be condensed into one solid globe—then the words *rest* and *motion* might as well be taken out of the dictionary. Imagine all the atoms to be as close to each other as possible; then the mass would be "dead," unless, indeed, corpuscles revolved around their central suns—atoms. Now, let the sphere be divided into two equal masses, separated by an enormous distance. Gravitation would act and set up motion causing them to draw nearer to each other. Both would approach a point between them—their center of gravity—with ever-increasing speed. Given original distance apart great enough, then the cessation of motion at instant of collision would, by the law of conservation of energy, evolve heat sufficient to dissipate the entire mass back to the primordial cosmical state—the corpuscular. These would expand through an inconceivably wide space. If the tenuity of the expanded mass of corpuscles should equal that resulting from the resolution of the matter now in the solar system, so that a sphere having a radius equal to half the distance to our sun's nearest neighbor would be filled with the electrons—then enough of them to be in mass equal to one grain, would occupy 290,000 cubic miles! If the corpuscles in a little aluminium weight used by pharmacists should be expanded to fill an ordinary room in a house, the rarity of the mass would already be beyond all imagination. Then what will be said of the state of the same quantity of matter diffused throughout 290,000 cubic miles? Our two bodies will strike together; but let a third body appear. All will move toward their common center of gravity, but will not collide. They will form a regular revolving system, and become a "triple star." Suppose that in the case where only two bodies were in existence, some unknowable force had acted at any time in their career, to deflect one away from a straight line joining their centers of gravity; then no collision could take place, they would fall into orbits around their gravitational center and become a fine "double star." A third body acts as the unknown force. If the third mass is so far away that time is had for the two bodies to form a double star before it arrives near enough to produce a pronounced effect, the result will be a double sun revolving around a single. For, let cosmical masses in free space be deflected from a straight line joining their centers of gravity, then impact is impossible. Regular circuits will be made, in stable equilibrium, of necessity. This is owing to centrifugal tendency, one of the most potent agencies in nature. The complex curves traversed by three bodies before they become locked on regular orbits, have not been completely elaborated by mathematicians. The only possible case where an absolutely straight line could be traced by any cosmical body would be where only two were in existence. Hence, with many billions of cosmical bodies, suns and worlds, curves only are moved over. And the curvature of these is continually changing. Thus, our sun is attracted this way and that, by ever-shifting suns, to the right and left, and its pathway is sinuous and wavy. Every sun in existence attracts all others, modifying their motions slightly. Binary and triple suns traverse regular orbits, but solitary suns, like our own, are not in revolution around any stable or permanent gravitating mass. The idea of a vast central mass, whether hot or cold, light or dark, so enormously massive as to be able to dominate the entire universe, has long been exploded. We live on an atom of a world revolving around a lonesome sun, somewhere in the vicinity of the center of the Galactic Ring. A ship in mid-Pacific is not more isolated or lonely. Our sun's nearest neighbor is twenty-five trillion miles away. And on an express train with an incessant speed of one mile per minute, the time to go there would be 48,630,000 years! From our infinitesimal home, we look into the most appalling solitudes and deeps of space, and behold myriads of suns. Many of them, after long-continued and laborious research, are found to be shifting their positions. This displacement has been assigned by the ablest astronomers, for two and one-half centuries, to universal gravitation. Yet, letters have been received at this observatory, disputing this cardinal fact, saying that gravity is not the cause of the motion of suns.

Lowe Observatory, Echo Mountain, Cal.

Aluminium absorbs nitrogen when melted. A lot of aluminium skimmings will give off ammonia when wet. This shows that nitrogen has been absorbed.

The Care and Use of Spark Coils.

BY E. Q. WILLIAMS.

One of the most important considerations with any coil is to keep it dry. Although we hear a great deal about waterproof coils, it is a good plan with any kind to keep them in a dry place, not where they will get hot, but where they do not get damp, as the pressure of the jump spark is so high that it will run along a little streak of moisture almost as well as on a wire, and though it tends to dry up this moisture in so doing it sometimes carbonizes the wood* and makes another path for itself. Too much care cannot be taken, especially on launches, to have a good place for the coil and battery. And here let us sound a note of warning: Do not put on over six cells of dry battery or three cells of storage; if your coil doesn't work with this amount of battery in *good condition*, look for trouble in it; increasing the voltage will only burn out the contact points without helping the secondary spark materially.

Another thing to be guarded against is the tendency to set the vibrator spring too tight, "so as to get a good, big spark." This is tested in the air, and when a big, flaming spark is secured, the operator thinks "that will fire anything," while as a matter of fact it will skip and bother on a quick-moving engine. What is wanted for successful running is a "quick spark," that will get there just when it is needed and every time. Such a spark is usually a small one. The adjustment to secure it is the following: The vibrator screw is drawn back until it does not touch the spring. Then set the spring so that the iron head is from 1/16 inch to 1/8 inch from the core. Now bring the screw up until it touches the spring lightly, and start your engine; if it skips any, try adjusting the screw a little tighter, but leave the spring just *as weak as you can* and not have the engine skip. In this way the engine will run at its highest speed, and the battery will last very much longer. The battery consumption can be frequently increased to three or four times the amount a coil should take, by merely setting the spring stiff and getting a "big spark." On the other hand, there is a danger of setting it too weak, so that when the engine stops the vibrator spring does not touch the contact screw, and the engine will not start.

Another puzzling trouble to find is a wire that is broken inside the insulation. This sometimes happens in the most unlooked-for places, but usually where the wires are moved or bent most, as at the commutator or where there is a great deal of vibration. It can usually be located by bending and pulling, as the wire will be very much weaker and more limber in the broken spot. The writer frequently uses another piece of wire, and "jumps" the suspected wire; this tells the story quickly and surely, when the defective wire is replaced or repaired.

Spark coils when in use almost always have one secondary terminal connected to the primary, or "grounded," as it is called. This is to reduce the number of wires to the engine, and to enable the spark to complete its circuit.

In the dashboard or multiple types this connection is made inside the coil box, but in the ordinary single and some multiple coils, both secondary terminals are brought to the outside, and the ground connection is put on outside. Sometimes when a coil ceases to spark or breaks down, by changing this ground to the other secondary terminal and putting the plug wire on the terminal that was grounded, the coil will work as well as ever and run for a long time.

A secondary or plug wire lying over a hot pipe or cylinder is pretty sure to give trouble sooner or later. Block it up with a piece of wood or fiber, or if possible, move it away entirely; also keep oil away from your wiring, as oil rots rubber, and the wires are, or should be, insulated with rubber to guard against dampness. Do not draw the spark out in the air to see how long it is; this strains a coil, and if there is any weakness it will be sure to increase the trouble, even if it does not break down then.

Watch your spark plugs, too, as well as the spark points, as many a coil is blamed on account of the plugs; the outside gets greasy and dirty, then the spark occasionally jumps there and the engine skips, or if the plugs are foul, the spark cannot ignite. If you want solid enjoyment from your ignition system, keep everything clean and dry.

THE DE PLUVY DIVING DRESS.

A novelty in the way of diving apparatus is the invention of M. de Pluvy, a prominent hydrographic engineer of Paris. This invention forms the subject of our cover illustration and is one which promises to be

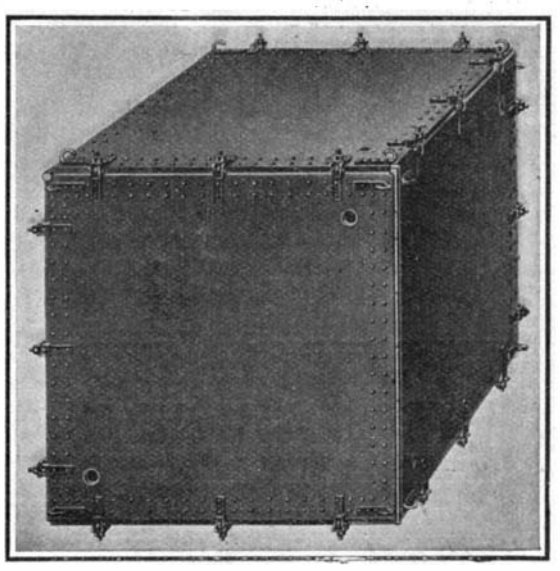

The Collapsible Caisson.

of great value in salvage operations. As De Pluvy has had many years' experience in diving operations, there is no doubt that the apparatus is of practical value. He uses a metallic diving suit which is made somewhat on the plan of the ancient coat-of-arms, being built of light and strong sheet metal having a thickness varying from 0.2 to 0.3 inch according to the position of the pieces. The joints and coupling points are made of pressed leather and rubber, and a special form of hydraulic joint is employed. On the top of the armor is fixed the helmet, which is the principal feature of the apparatus. The air is not brought to the diver from the outside, as usual, but the air he breathes is sent by a tube into a special regenerating chamber containing certain chemical products which renew the supply of oxygen and the air is then sent to the interior of the helmet by another tube. The air-renewing apparatus is contained in a pair of cylindrical chambers attached to each side of the helmet. Regulating valves keep the air pressure within the helmet at the right amount and always constant, no matter what the depth may be below the surface. Mounting and descending are effected by a drum and cable worked by an electric motor. At the same time the cable serves to carry the current which is needed for the respiratory apparatus. The diver communicates with the surface by a telephone, and a number of wires run from the armor up to a set of colored lamps, showing how the different parts are working. There are many advantages to be secured from the new apparatus, and we expect to give a more complete and illustrated description of this interesting device. M. de Pluvy has personally been able to go down to a great depth, and during the 115 descents which he has already made with the new diving suit he reached depths varying from 150 to 300 feet. This far exceeds the depth to which an ordinary diver can go.

Besides the new diving dress, M. De Pluvy is also the inventor of a collapsible caisson which may be used in connection with the diving suit.

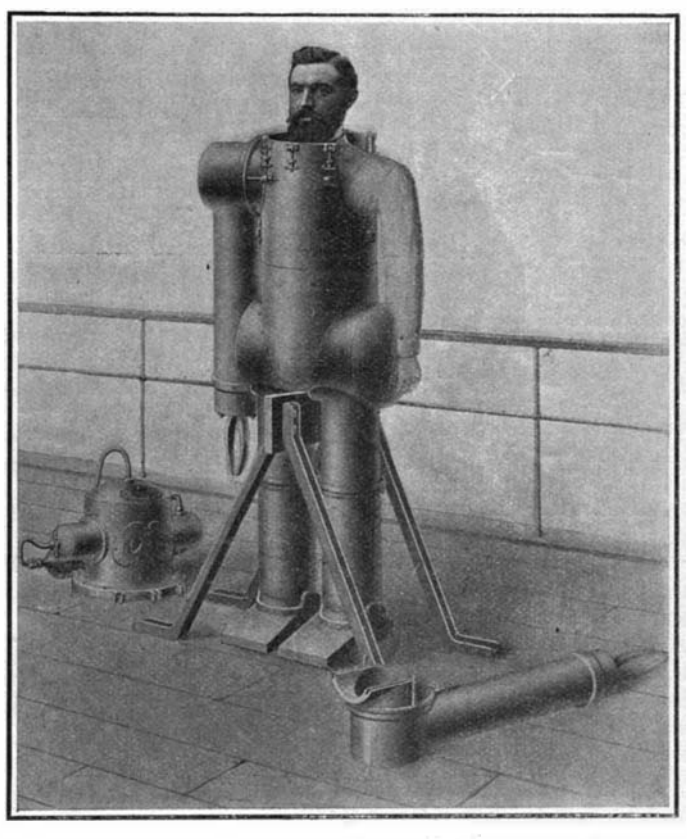

The Helmet and One Arm Piece Removed.

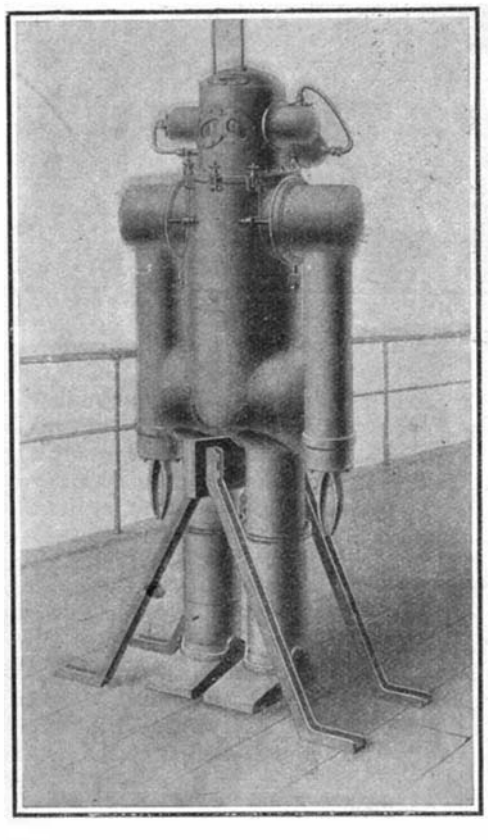

Ready for the Descent.

THE DE PLUVY DIVING DRESS AND CAISSON.

Pure Alloys of Tungsten and Manganese and Their Properties.

A method of obtaining tungsten, or alloys of this metal, is presented by a French chemist, G. Arrivaut. By reacting with aluminium upon a mixture of oxides of these metals, it is possible to obtain alloys of tungsten and manganese which are rich in tungsten, but it is difficult to have a complete separation from the slag, and to do this it is necessary to operate on a large scale. But the author is able to obtain good results with reacting masses which are relatively small, by using tungstic anhydride and bioxide of manganese added to the right amount of lower oxides. The heat of the reaction is thus increased by the excess of oxygen in the mass. Alloys which are low in tungsten can be also obtained by the Schloesing furnace by using a current of hydrogen in which are heated the metals in powder mixed and compressed, but the value of 25 per cent in tungsten can hardly be exceeded. The author succeeds in forming alloys ranging from tungsten = 12; manganese = 87.34, up to the value tungsten = 60.05; manganese 39.20, making seven alloys in all.

The properties of the alloys are as follows: These bodies appear in the form of hard and brittle masses with a granular section and a steel-gray color. They are not magnetic. Air acts upon them slowly, forming brown spots of manganese oxide. Sulphuric acid, concentrated and boiling, or better still, bisulphates in fusion, will dissolve them entirely. Dilute acids, acetic, hydrochloric, etc., attack them energetically, even in the cold, but the action is always incomplete, and there remains a residue which contains all the tungsten. The latter finally contains no manganese. Preparation of tungsten by the alumino-thermic process is hard to carry out owing to the relative infusibility of this metal, but it is easier to form the alloys of it with manganese and the former can be then separated as above. Mixing oxide of manganese 360 parts, tungstic anhydride 100, bioxide of manganese 40, oxide of tungsten 100, and powdered aluminium 150, he obtained a mass which is well melted and homogeneous, free from slag and weighing half a pound. It contained about 45 per cent tungsten. When broken up and treated with hydrochloric acid it set free about one-half the weight in tungsten which was very nearly pure (99.55 per cent). This is seen as a steel-gray metallic powder, very heavy and presenting the usual properties of tungsten. Its density at 0 degrees C. is 15.28 compared with Moissan's value for cast tungsten of 18.7.

Flake graphite lubrication has been tested by Prof. Goss at Purdue University in comparison with neat kerosene lubrication. For this purpose one part by weight of flake graphite was mixed with two parts of kerosene. The immediate effect of adding the graphite was to permit an increase of load from 50 pounds to 110 pounds per square inch, and to reduce the coefficient of friction from 0.00547 to 0.00296. Another result was the excellent running of the bearing with kerosene alone after the rubbing surfaces had been cleaned; this was due probably to the enduring effect of the graphite in the microscopic pores of the metal.

A brass solution should be run slightly warm, but not smoking hot. The results are then not as good. A temperature of about 120 degrees is excellent. A solution that is hotter drives off the ammonia rapidly, evaporates the water, and does not give any better results than when a lower temperature is used.

* A peculiar characteristic of wood is that when wet it is a conductor, when dry it is a non-conductor; when blackened by heat or carbonized it becomes a conductor, and when burned to ashes it is again a non-conductor.

SOME NOVEL ELECTRIC LABOR-SAVING DEVICES.

The wonderful adaptability of electricity for most varied purposes is constantly being made evident in new forms of light, new heating appliances, and new uses of the electric motor. The accompanying engravings illustrate a few novel labor-saving devices, which are dependent for success on the convenience of the electric motor as a power source.

The dandruff-removing apparatus, which we show, is the invention of a resident of New York city. Many of our readers are doubtless aware of the difficulty with which the cuticle of the scalp is thoroughly freed from dandruff scales, and how inadequate the conventional means are for this purpose. The device in question utilizes a partial vacuum, by means of which air is drawn through the teeth of a hollow comb with which the scalp is massaged, thus drawing the loosened scales through the teeth of the comb into a receiver. As the illustration shows, a small electric motor is provided in the base of the device. This motor may be connected by convenient flexible wires to the ordinary lighting circuit. Above the motor is located a small rotary air pump, which is connected by means of a belt to the motor. The air pump communicates through a metal tube with the interior of a glass cylinder supported above the top of the apparatus. The tube enters the cylinder, and extends to a point near the top of the same. A flexible tube communicates

Removing Dandruff by Vacuum.

with the interior of the cylinder, and has at its free end a specially-constructed comb, which has hollow resiliently-mounted teeth covered with rubber or similar material, so that they will not injure the head when in use. The cylinder, which is provided with removable heads, also has a safety valve, an adjustable air inlet, a vacuum gage, and a pressure gage. When the motor is started, the air is soon exhausted from the cylinder by means of the pump, and a strong current of air is thus drawn through the teeth of the comb into the cylinder, bringing with it the loosened dandruff scales. The cylinder is partially filled with water which catches the dandruff, thereby preventing the entrance of the same through the pump into the room.

By throwing a switch the motor may be reversed, causing the air pump to force a strong current of air through the cylinder and out through the teeth of the comb. This or a special nozzle may be used for drying the hair, or an atomizer may be connected directly to the tube. The machine is furthermore equipped with a massage appliance, by means of which the vacuum or suctional massage so generally used may be applied.

A device which resembles the above in purpose, though it is very different in operation, is the electrically-driven horse groomer. Not only does grooming improve the appearance of a horse, but it materially assists in keeping him free from skin diseases of various sorts. To properly groom a horse takes time, time which can be ill afforded in large stables, such as those of an express company, a department store, or the like. As a consequence, the hard-worked, dust-coated animals must often be content with a hasty or careless brushing, and sometimes they are entirely

Electric Shoe-blacking Machine.

neglected. Recently many progressive concerns have been using the mechanical groomer which we illustrate, thereby affecting a great saving in time, and securing better results than could be obtained with handwork. The machine consists of a pair of flexible shafts, each connected by a universal joint to a swinging arm, which in turn is connected by a universal joint to a bracket secured to the ceiling. The device is operated by a two-horse-power electric motor, inclosed in a box, which may be seen at the rear near the ceiling. The power furnished by the motor is transmitted by means of belting down to a pulley on the flexible shaft, thereby causing the latter to rotate. The free end of each flexible shaft is provided with a spindle, on which a cylindrical brush of any desired type may be secured. The brush is very rapidly rotated by the flexible shaft, and in use is passed with a gentle pressure over the animal's coat. The shaft is very flexible, being formed of spirally-coiled wire, and is provided with handles which permit the operator to seize it and freely bend it to any desired angle while following the contour of the horse.

The work done by this machine is very thorough. The amount of dust and dandruff that it will loosen and remove from a horse which has been well groomed by hand is surprising, and well illustrates the superiority of machine grooming over hand grooming. When one of these machines is introduced into the stable, it must first remove from the horse's coat the dirt which has been accumulating for years. It may be a week or two before this is thoroughly effected, but when once the skin is clean, it takes less than two minutes of grooming twice a day to keep it clean. Thirty horses per hour is the average work per machine done in many stables. Furthermore, the animals thoroughly enjoy the massage, for this is virtually what the operation is, and when released from their stalls will often run over to the machine of their own accord. The look of perfect peace and contentment depicted on the face of the animal shown in our engraving is an excellent testimonial in behalf of the grooming machine.

The shoe-blacking machine which we illustrate might almost be called a modification of the horse groomer, so similar is it in operation. In this case, however, the flexible shaft is directly connected to the motor, which is suspended from a crane over the customer's chair. The crane is swiveled on the back of the center chair of a three-chair stand, but can be swung to overhang either of the other two chairs. The motor is mounted on a double set of trunnions, so that it may tilt in any direction. Brushes suitable for the various classes of work may readily be secured to the spindle at the end of the flexible shaft, and used in obvious manner. The ordinary lighting circuit supplies sufficient current to operate the motor.

Many an inventor casting about for some field of usefulness has lit upon shoe-blacking as a promising subject, and quite a number of boot-blacking machines have accordingly been invented. The difficulty with most of these machines is that they are too mechanical, the boot-black being almost entirely eliminated. With this type the present invention forms a marked contrast; for it is only the muscle-tiring, back-breaking work that is taken over by the motor, while the application and the manipulation of the brush is still left to the intelligent control of the experienced boot-black.

Imitation Precious Stones.

Consul Albert Halstead, of Birmingham, reports as follows in regard to successful methods of imitating certain precious stones:

Birmingham is the center of jewelry manufacture in the United Kingdom. Here are trained jewelers of the most skillful kind. Jewelry workmen have emigrated from Birmingham to the United States in such large numbers that a few years ago in one of the largest silverware manufactories in America there were employed 600 men who had learned their trade in the Birmingham district. Not a little jewelry was formerly exported from this district to the United States, but the development of the art in all classes of jewelry in America has materially reduced Birmingham's exports. Still the trade here is reported to be better than for some time, although manufacturers complain that things are not as they were. The keen competition of German cheap and imitation jewelry has so seriously interfered with Birmingham manufacturers that they now make comparatively little imitation jewelry. Much 9-carat gold jewelry is still made here, but the finer type of jewelry is Birmingham's staple.

The Birmingham Daily Mail shows how adept fakirs have become in recent years, now that the prices of genuine precious stones of the highest quality have greatly increased. The diamond seems to be the only stone that resists successful imitation. The ruby, sapphire, emerald, and pearl are skillfully imitated. Even experts find it hard to detect the fraudulent gems. Defective white pearls can be converted into brown or even black ones. A converted black pearl has been so well colored that it sold at a fabulous price.

Imitation pearls are plentiful and look so like the real thing that they deceive experts. They are made by means of a transparent glass shell, a little glue, and some essence of the Orient, a silvery, pearly substance, composed of fine scales rubbed from a small fish called the "bleak" or the "ablete," 17,000 of which require rubbing to get a pound. Even turquoises are not above suspicion.

The copper output for the United States for 1905 was 397,909 tons, 100,000 tons greater than the average for the last five years.

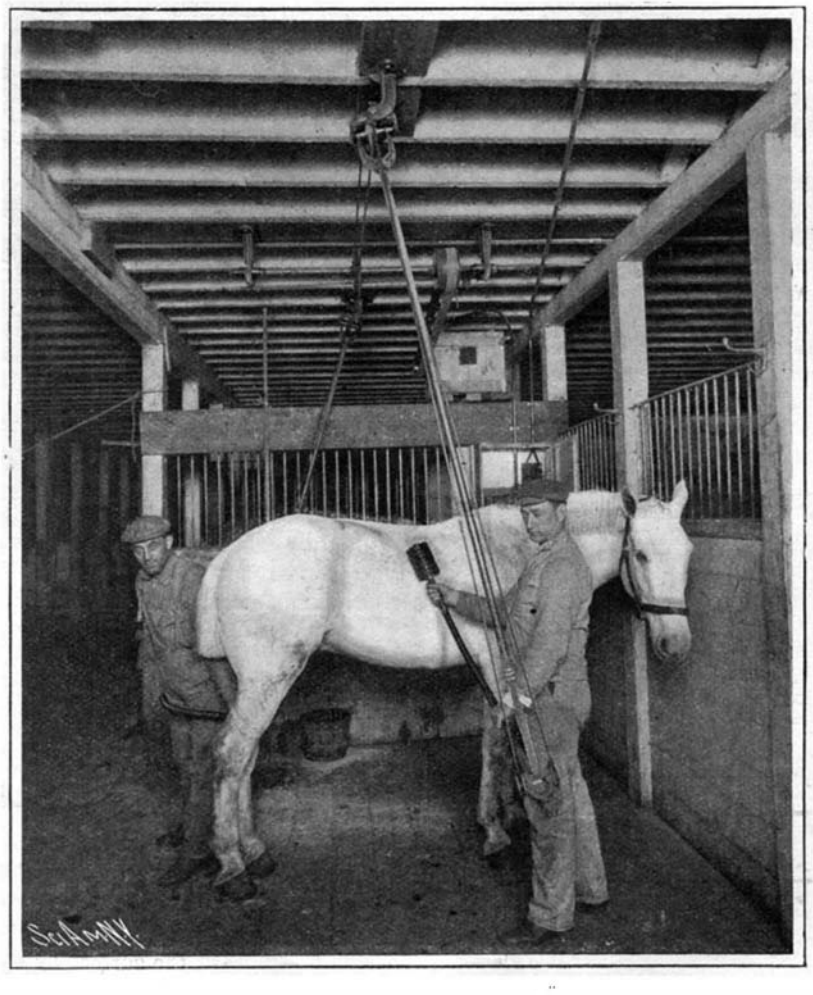

Grooming a Horse by Electricity.

A POCKET-KNIFE ARTIST.

BY DAY ALLEN WILLEY.

When we speak about whittling we generally think of one who sits on the barrel or cracker box and kills time by cutting shavings off a stick or putting a point on it—the crossroads store whittler we see in the play. There is a Philadelphia man who is a different sort of pocket-knife artist, for with the sharp blade of a simple jack-knife he turns out various things from imitations of tools to wooden jewelry. Ben Clay, as his neighbors call him, is a sort of neighborhood Santa Claus, besides being a wizard with the jack-knife. He calls the work whittling, but instead of turning wood into shavings he makes chains, pincers, and other objects which are highly prized by his friends, for the reason that he gives away a great many of them for Christmas and birthday presents. Consequently his friends and neighbors are well aware of his talent in this respect. In looking at some of the chains which Mr. Clay has fashioned, it seems impossible that they could have been made out of a single piece of wood, but such is the fact. One can examine the links with a magnifying glass and see that they are all cut from the solid wood. There is not a crack or crevice or a place where the ends of the links have been glued together, yet the chains are as flexible as if finished by the goldsmith or the silversmith. This veteran whittler calls it an easy task to fashion a chain of single links. This anyone would think was made of parts first finished, then linked to each other, but not a link has ever been separated from its fellow. The knife blade shaped each from the block, after which it was smoothed down with sandpaper. Even the swivel at the end is from the same stick and was cut out while attached to the links without severing it from the link into which it fits. After Mr. Clay found he could make a watch chain of this pattern he tried his hand—or rather his knife blade—at what he calls a double-link chain—one in which two links arranged parallel to each other loop through two other parallel links, and so on. This was much more difficult, but he finished it without breaking a link. Then he attempted a quadruple chain—four parallel links looped through four others. In this case it was necessary to make some nice calculations to tell just how much wood would be needed for each set of four links, how much extra wood to leave where the ends of the links were to be cut out, for here the ends of one set of links would lap over the ends of the set into which they looped. It took a good many evenings before the "four linker" was finished, but it was finally completed without a break. This chain is Mr. Clay's most skillful whittled piece of work, although he has cut out several "anchor chains" besides. Each section, instead of being merely an oblong ring, is hollowed out in the center and pierced through with four slits running lengthwise. The four parallel links thus formed are looped into the four adjoining links, and each link is as movable as if it formed part of a single-link chain. The anchor chains are likewise worked out of one piece, and not a pin, bit of wire, or other connection is used.

The chains vary from a foot to sometimes three feet in length. They are usually cut from sticks of black walnut. When Mr. Clay begins operations he first takes a stick of a suitable length. He shapes down the outside to the proper proportions with a plane so as to give a smooth surface. This, however, is the only tool used except the knife, and it really has nothing to do with fashioning the chain. He measures off the surface of the stick with a rule, marking the sizes of the links upon it. Then his knife blade goes into action, and the wood is formed into these intricate chains, into this curious jewelry, which as stated above, are as flexible as any chains made of metal, since each link is loose and plays into the one with which it is connected. After the rough work with the knife has been completed, Mr. Clay takes the sand-paper to remove the sharp edges which may remain.

As may be imagined, a straight eye and steady nerve are needed when the block is cut down to a point where the link ends are to be shaped, for a cut a quarter of an inch too deep or too much on one side may sever the chain. As a single-link chain requires some 75 hours to complete, an accident means the loss of considerable time. But seldom does the knife blade slip, and the pieces which are spoiled through such a mishap are few indeed considering the intricate designs.

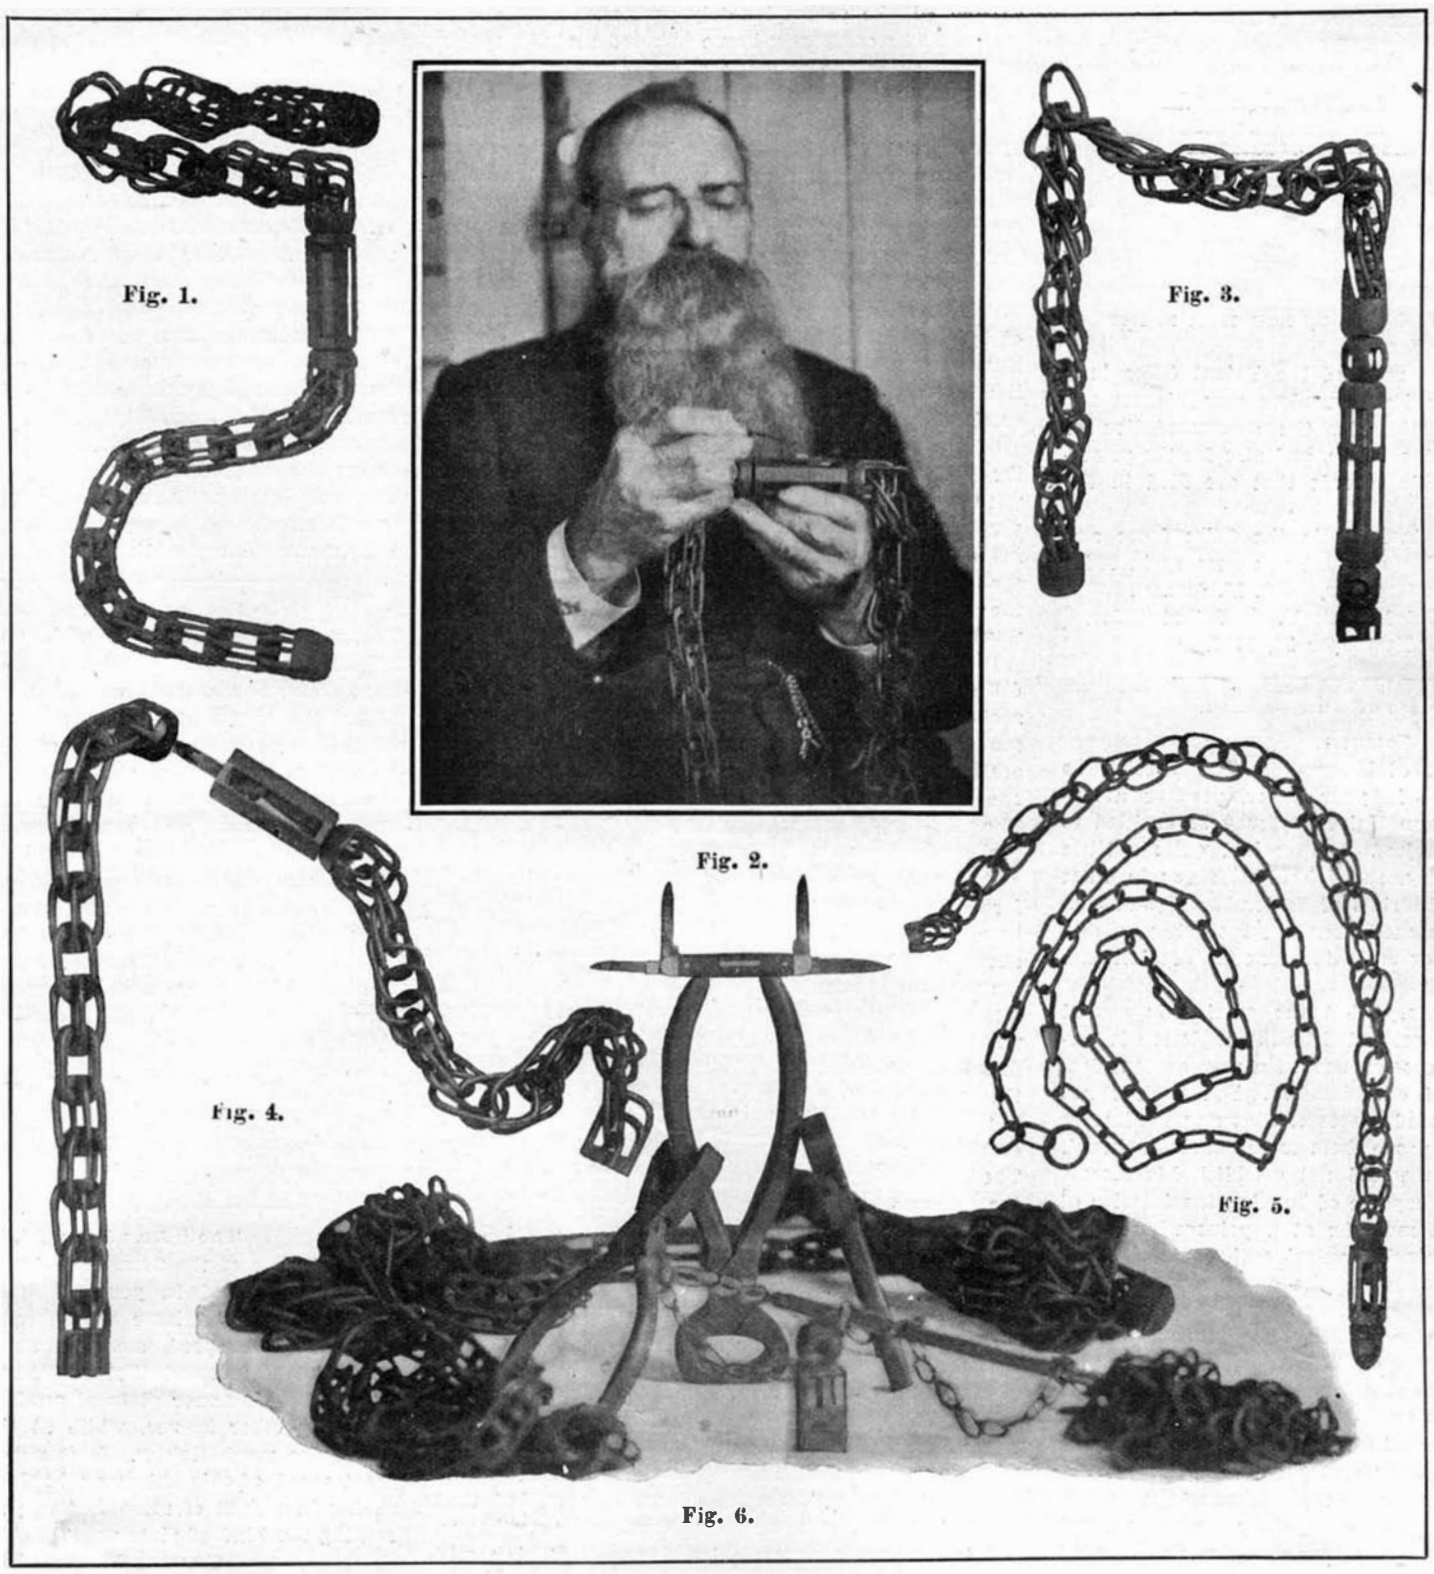

Fig. 1.—The section on the left is composed of links divided into six parts; the section on the right is made up of links of four parts. Fig. 2.—The whittler at work. Fig. 3.—Double link chain cut out of one piece. Fig. 4.—Chain made from one piece of wood. Fig. 5.—A single link and a double link chain. Fig. 6.—The jack-knife and its work.

A POCKET-KNIFE ARTIST AND HIS WORK.

New Photographic Shutter.

In the exposure of a sensitive plate in the camera, under ordinary circumstances, it is impossible to get a correct timing for all the different parts of the plate, for the reason that such parts of the view which are more generously illuminated will be greatly over-exposed when the right timing has been given to the shadows. This is particularly true of landscapes, where it is desired to have the cloud effects as well as the proper definition of the various features of the composition. In order to overcome this disparity, it has been necessary to resort to the use of a ray filter, which was undesirable because it greatly prolonged the exposure, or to make use of a process known as "double printing." In the latter method the photographer makes two plates from the same viewpoint, one timed for the sky and the other for the foreground. Each is put through the various operations of development, and when it comes to making the print, the sensitized paper is exposed for the sky under one plate and for the foreground under the other plate. This work must be very neatly done, or the imposition will be detected.

After a long period of experimenting, a camera shutter has been devised by a well-known optical firm, by which it is possible to illuminate the plate properly, no matter what the conditions of light may be. As on the plate in the camera, the sky is reversed, and so at the bottom, the rays of light from the sky must enter at the top of the front lens and cross the rays of light from the foreground at the diaphragm point. It is a fact, therefore, that a shutter working before the lens which admits more light from the bottom than from the top will necessarily equalize the exposure. This is what is done by the new shutter. It has but one leaf or blade, which rises from the bottom, the speed being regulated by an indicating device. No matter what the time of exposure may be, the sky will be given a very much shorter period than the foreground. Thus it is possible to give one part of the plate a second, while the other part will receive but one-eighth. This shutter is placed before the lens, and is supplied with an automatic clamping device, which makes it readily attached and detached. An ingenious regulating feature makes it available for all kinds of work, as well as for the purpose for which it was designed.

It is reported that the new swift steamer to be put into the New York service of the Compagnie Générale Transatlantique will be of 11,600 tons, and a speed of 23 knots, and will only carry two categories of passengers—first and third; she will be named the Chicago, and it is not yet decided whether or not she shall have turbine engines.

Correspondence.

Improvement in Patent Office Conditions.—A Letter from the Chief Clerk of the Patent Office.

To the Editor of the Scientific American:

Permit me to correct several statements which appear in an editorial of the Scientific American for November 24, 1906:

"There is no sign of improvement in the serious congestion that hampers the work of the Patent Office. . . . At the present writing there are about 21,000 cases on file which have not yet been examined. . . . The office is falling behind at the rate of 300 to 350 cases a week."

As a matter of fact, all of the examining divisions of the Office have been making substantial progress with the work for some time past. A summary of the condition of the work in the various examining divisions made yesterday shows that the average position of all the divisions is now *within sixty days* on both new and old work. Half the divisions are close to one month on both the dates, while but two are four months in arrears, and two five months on their new work. None of the divisions are over two months in arrears on the amended work, averaging thirty-six days.

Since the return of the examiners from their summer leaves of absence, and the training in of the twenty-nine new men who began work here on July 1, the work has gone steadily forward, with large reductions of the delays in taking up new cases and in the number of cases on hand.

The most pressing need of the Patent Office is a new building, equipped with modern conveniences and of fireproof construction for the accommodation of the Office force and the public, and also for the preservation of the valuable records that are filed in the present building.

A regular annual increase in the Office force and larger salaries are also regarded as necessary in order to accomplish the best results, C. M. Irelan,

Chief Clerk U. S. Patent Office.

Washington, D. C., November 28, 1906.

The Causes of Gun Erosion.

To the Editor of the Scientific American:

While the subject of big-gun erosion is being so thoroughly discussed in your paper, perhaps a student of Ohio Wesleyan University may be entitled to be heard on the subject. I have had quite a little experience in gunnery, and I hold with you in what you said in your editorials of September 15 and September 29, with the exception that I think you, and Mr. Cardullo also, overrate the amount of abnormal erosion.

Mr. Cardullo's theory that the erosion is caused directly by the heat generated by the explosion is certainly new, and if erosion needed a new explanation, might be worthy of consideration. But it does not appear that the eroded places exhibit any distinctive features that would prove them to be "burns"; though even if they did, it would not establish his theory, for if the gases are capable of burning the interior of a gun anywhere, it must be at a point where they rush at an inconceivable velocity through a small opening. That "burning" of the gun-wall under such conditions may be a possible, nay, probable, cause of abnormal erosion, I do not deny. Ironworkers tell me that in a "scrap" furnace, which is constructed so that the flame and gases of combustion must pass through a very small neck between the furnace and the chimney, the fire brick at the narrowest place is slowly eaten away by the volume of flame which roars past them. It might be adduced that in a gun the projectile is moving, and that consequently a new and cool surface is being constantly presented against the play of gas; but it must be remembered that we only seek to account for erosion in that part of the gun's length where the projectile is moving slowly. That the abnormal erosion could be caused in so short a time, merely by the free circulation of even the hottest gases, is not to be taken for granted without stronger support than the fact that the erosion progressively increases from muzzle to breech.

In any operation we can conceive of by which so heavy a projectile as the 12-inch shell could be accelerated through a 45-foot tube to a speed of 2,900 feet per second, there must be enormous friction, and consequently, great wear, on the inner wall of the tube. This necessary erosion is what I describe as "normal." In rifled guns I have always been inclined to take as a unit of normal erosion an amount slightly less than the amount actually produced one or two feet below the muzzle, and if this unit could be accurately expressed in figures for any given caliber of gun, ordnance theories would be robbed of much of their complexity; for, given this unit, it would be only necessary to refer to a table showing the varying amounts of acceleration the shell received from the breech to the muzzle, to be able to find what the normal erosion for any point of the gun's length was. In the absence of any such data, however, we can only affirm that the amount of normal erosion should progressively increase from the muzzle to the breech.

This is only the natural working out of the law which governs a projectile, when it is being accelerated and at the same time made to hold itself to certain uniformly twisted grooves. When the charge is exploded the projectile begins to move. As it begins to move forward, it also begins to turn. The strain of making it move forward is borne by the gun, and is called the elastic strain; the strain of making it turn is borne by the rifles, and is called the rifling strain. It is the rifling strain that causes normal erosion. If the projectile is light and accelerated to only a moderate velocity in a comparatively long space of time, the rifling strain and its accompanying erosion will be slight; but if the projectile is heavy and accelerated to an enormous velocity in a very short space of time, the rifling strain and its accompanying erosion will be proportionately greater.

It must be constantly borne in mind that the rotary acceleration is the primary cause of normal erosion, and that, in a gun with uniformly-twisted rifles, the rotary acceleration throughout the gun's length varies directly with the forward acceleration. As the projectile receives a larger part of its forward acceleration at the breech, and consequently a larger part of its rotary acceleration, than in any other equal portion of the gun's length, it is evident that both the elastic strain and the rifling strain must be greatest at the breech. The greater elastic strain is taken care of by the breech jacketing, or the gun would burst. But the greater rifling strain is left to take care of itself, and the result is excessive, but still normal, erosion.

Of course there would still be erosion in a gun if the rifling was perfectly straight, or even if there were no rifles; but it would be inconsiderable. To appreciate the amount of erosion caused by the twist in the rifling, suppose the projectile started at full speed—if the bearing rings on the projectile were of the proper material to "stand up" the rifles of the gun would be stripped for half their length.

If one looked only at the 12-inch gun, it might be difficult for him to prove that there was present any such a thing as abnormal erosion; though there would remain even then the strong probability of it, for there are present elements in the firing of a big gun which one would naturally suppose would cause erosion. The most important of these is the imperfect fit of the shell to the bore of the gun.

But when we compare the 12-inch gun with other forms of firearms, the probability of abnormal erosion becomes a certainty. For instance, a 30-30 rifle of about ninety calibers in length will fire from four to ten thousand rounds without seriously deteriorating from its original accuracy, and here there is probably no abnormal erosion whatever. A 6-inch cannon, forty-five calibers in length, will fire from one to two thousand rounds without serious erosion; here there is the probability of there being considerable abnormal erosion, but we still consider all the erosion normal. Then comparing the weights, calibers, and erosion of the two guns, we must calculate the life of a gun of the size of the 12-inch as from 300 to 400 rounds. But we find our calculations greatly in error, and so we have no choice but to conclude that there is an erosion outside of what we have fixed upon as normal, which increases progressively as we increase the caliber of the gun. Turning now to the probable cause of abnormal erosion that we spoke of before, the imperfect fit of the shell, we find that a 30-30 bullet can be made to fit the rifle almost perfectly, that the 6-inch shell fits imperfectly indeed, but is light and is able to readily set itself to the rifling grooves, but that the 12-inch shell fits very imperfectly, is very heavy, and is intractable about taking the rifles. This would seem, at least on its face, to connect abnormal erosion with an imperfect fit of the shell.

There is another element which may play a part in producing abnormal erosion, and its testimony is in the same direction. The inertia of a 12-inch shell is greater than that of a 6-inch shell in the ratio of 8 2-5 to 1, while the base of the 12-inch shell is greater than that of the 6-inch shell only in the ratio of 4 to 1. It will be readily seen that the 6-inch would start under a much lower pressure than the 12-inch; consequently the gases, if they do produce the abnormal erosion by flowing past the shell, would have a longer time to work before the shell started, and would work under a higher pressure both before and immediately after the shell had begun to move. Certainly, if the hot gases succeeded in getting past the projectile before it had begun to move, there would be little need to look further for the cause of abnormal erosion. What reason is there for supposing that they do not do this very thing? There must be a considerable pressure behind the shell before it begins to move, and as soon as the pressure reached any figure at all the gases generated would certainly begin to flow through any apertures that might have been left between the wall of the gun and the shell, both eroding the bore and heating the rifles.

It would appear, then, that we have got at the cause of abnormal erosion, in the imperfect fit of the shell, but as in spite of the most carefully constructed theory there still remains a possibility, if not probability, of error, the question can only be settled absolutely by experiment. A few trials of firing, from an ordinary nickel-steel barrel, patched bullets somewhat smaller in size than the caliber of the barrel would probably be decisive one way or the other.

If it were found to be true that the cause of abnormal erosion is what our theory states, there can be no difference of opinion on what would constitute a remedy, however difficult it may be to produce a device that will successfully carry it into execution. Mr. Cardullo's high-speed steel would probably help, but I look for the remedy to appear in some form of your obturating pad. If this should fail, I have in mind a remedy of a different sort that might be tried as a last resort; but I think with you that our ordnance engineers have not as yet done enough to entitle them to declare the task an impossible one.

An idea has occurred to me since I began writing, which, though it would probably prove impracticable, may nevertheless be of interest. I would prescribe for abnormal erosion a small depression to extend around the projectile at the base of the first bearing-ring. This depression-ring should be in cross-section a clear-cut segment of a circle, with its chord absolutely flush with the surface of the iron. It should be of a depth subject to experiment—say ⅛ of an inch—and should extend under the base of the bearing-ring a distance also subject to experiment. The white-hot gases rushing into this depression, something like steam into a whistle, might possibly be checked sufficiently to swedge the base of the bearing-ring into the rifles before the projectile started, thus sealing the rifling ahead of the ring against any further flow of the gases into them. Eugene Van Bremmer.

Delaware, Ohio, October 5, 1906.

To Prevent Railroad Collisions.

To the Editor of the Scientific American:

Will you permit me to call your attention to the suggestion of an old railroad man, which is the result of mature judgment, and seems to me to appeal to reason and common sense? It is that all collisions with standing trains, especially rear-end collisions, often so terribly destructive to life and limb because no buffer intervenes, may be entirely prevented by the immediate isolation of every passenger train as soon as it stops. Thus by the turning of switches before and behind it, cutting it off from the main line, it is safe from other trains, whether running wild or from any reason out of control. The moving train will pass to one side, to regain the line beyond, and harmlessly expend its momentum. Thus such terrible disasters as the one at Revere, Mass., at Jackson, Mich., and lately at Lansingburg, N. Y., and in the suburbs of Boston, could not occur. May not this be, in the future not so very far, as much a requirement of the law as the safety brake and the interlocking switch?

Waterville, Me., October 21, 1906. G. S. Paine.

The "Dreadnought."

To the Editor of the Scientific American:

I am interested in your editorial concerning the "Dreadnought." I have seen frequent press notices concerning its speed, etc., but no comments on its armor. I understand that this new war machine is equipped with armor plate of much greater resistance than any other in use, while at the same time the plates are much lighter. Is it not probable that the great speed of this ship may be due in part to great saving in weight of armor? Can you inform me concerning the kind of plate used?

Charles Manuel, M. Am. Soc. C. E.

The Engineers' Club, 374 Fifth Avenue, New York.

[The "Dreadnought's" armor is Krupp face-hardened. Her speed is due to the 28,000 horse-power (maximum) of her turbines, coupled with her fine lines due to her great length.—Ed.]

The Current Supplement.

The current Supplement, No. 1614, opens with a splendid illustration of the President at Panama, showing him operating one of the giant steam shovels. An excellent article is that on metallic filaments for electric lamps. Dr. Wittelshofer writes of an alcohol illumination. An automatic carbonic-acid gas starter for automobiles is described and illustrated. Mr. James Alexander Smith's paper on air in relation to the surface condensation of low-pressure steam is concluded. Mr. Craig S. Thoms continues his instructive observations on how seeds are carried. In this installment he explains how seeds are carried by animals and birds. Camille Flammarion gives his views on earthquakes. Sir John Eliot writes on world weather. Steam traps are very exhaustively discussed by W. H. Wakeman in an article elaborately illustrated.

OCEANOGRAPHIC MUSEUM OF MONACO.

The museum occupies the eastern extremity of the gardens of St. Martin, on the rocky plateau of Monaco, covering the site which was formerly occupied by the powder factory and a small museum. It is established upon a steep declivity of the rock by means of solid foundations which descend as far as the sea, and covers ground which could not be used hitherto. In this way the Prince of Monaco succeeded in keeping the museum from infringing too much upon the magnificent gardens which surround it. The present building, erected on the plans of the architect Delefortrie, is entirely of stone taken from the Turbie, this being a secondary limestone which is very resistant and whose grain comes very near that of lithographic stone. A few pieces only, such as the monolith columns of the façade, have been brought from Brescia, but this stone is of the same kind. The museum is a long building, running about northeast-southwest. It measures 325 feet in length. The central part, measuring 65 feet long and 65 feet wide, is continued on each side by a wing 130 feet long by 50 feet wide. The arrangement and dimensions are the same for the whole of the building, except that the width is different for the basements. On the Avenue St. Martin is the entrance, and it gives access to a vestibule which is situated in the front portion, the latter being a projecting part in front of the middle portion of the museum. It contains the staircases which lead up to the upper or second story. From the vestibule, into which opens the entrance to the museum, we pass into the large central hall of the ground floor, which forms the reception hall. At each side of the latter is a hall for the exhibition of collections. The ground floor, which lies at 172 feet above the water level, is 23 feet in height. The second story, which is 37 feet high, carries an intermediate gallery between the ceiling and floor, and runs around the different rooms, which are laid out on the same plan as on the lower floor. These two stories are designed to be used to show the collections and instruments. On each floor the three rooms can be opened into a single large hall by means of sliding doors, thus making a hall of some 320 feet length which can be used for congress meetings or like purposes.

The lower two or basement stories face directly upon the sea, and therefore are well lighted. In Fig. 2 is shown the eastern end of the museum, and we observe the four stories of the building and also the arrangement of the roof, which is in the form of a vast terrace some 1,800 square yards in area, overlooking the sea. In Fig. 4 will be seen the interior of the lower basement floor, which is 11 feet high and is designed to be used for some of the rougher work, especially for the mounting of the large specimens, such as the large fish, cetaceæ, seals, etc. The same view shows in the foreground a series of vertebræ of a species of whale found in the Mediterranean, and farther back skeletons of fish about 20 feet long, which were captured by the Prince in the neighborhood of Monaco. The laboratory is equipped with a gas engine which drives the different machine tools used in mounting the pieces. Below is situated a well-aired annex room which contains the macerating basins, and these are large enough to receive the skeleton of an entire whale.

The other wing of the lower basement forms a large hall which is used to receive the aquariums. The latter are of different sizes, and we have first a range of nine basins measuring from 3 to 16 feet long and 3 feet high. Fig. 1 shows the contents of these aquariums, consisting of congers, lampreys, eels, and similar specimens, and the view was taken by magnesium light. At the end of this range of basins we find a large tank some 20 feet long which is to contain the fish of great size. Beside it is another large tank in which are to be seen two sea tortoises (*Thalassochelys caretta*). These specimens were brought from the Azores in 1896 by the Prince of Monaco, and since that

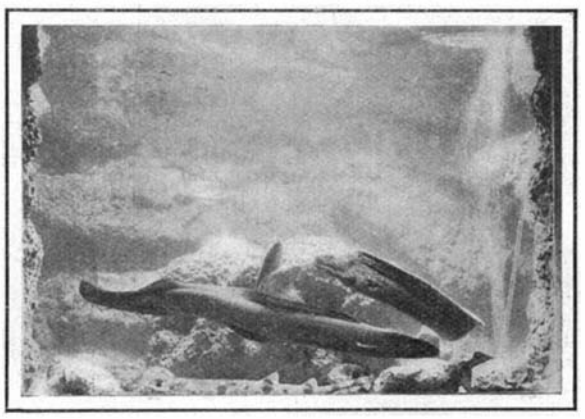

Fig. 1.—Congers in One of the Aquariums.

time one of them has grown from 7 to 88 pounds weight. A large table built in armed cement supported on an iron frame and measuring 70 feet long by 3 feet wide, runs parallel to the first range of aquariums. It forms a shallow trough which is designed to carry a number of movable aquariums, and the overflow from these can run out directly upon the table. These aquariums will be used for research and will be well lighted, as they lie next the windows. Many physiological and biological researches will be carried out here. Near by is a series of tanks in armed cement 6 by 3 by 2 feet. The sea-water is brought to a height of 110 feet by two pumps placed in a special chamber underneath, operated by electric motors from

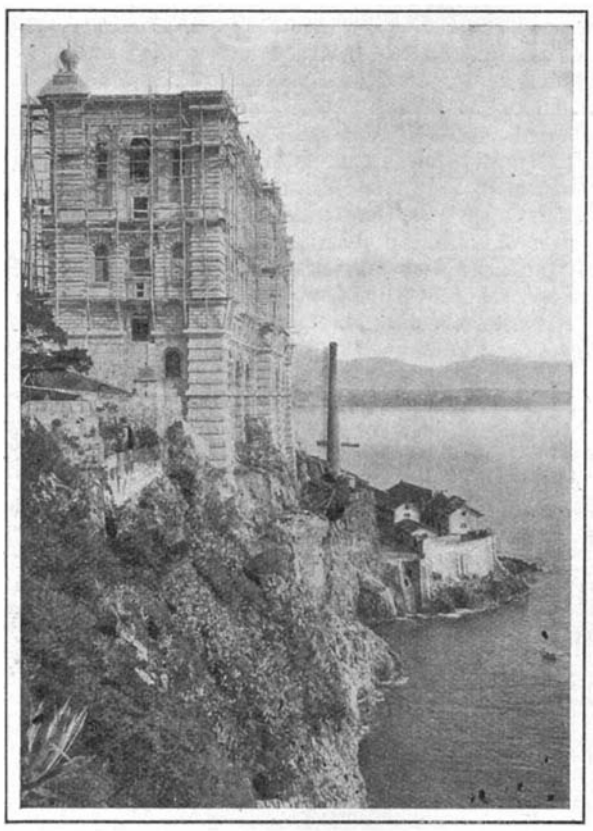

Fig. 2.—Eastern End of the Museum.

the tramway circuit, and is received in a tank reservoir. Thence the water passes to the aquariums with a fall of ten feet or more, which allows automatic aeration of the basins by an injecting atomizer system.

At present the aquariums contain a great number of specimens resulting from the captures at sea during the different expeditions. Above this floor is the upper basement story, which is 12 feet high and like the former is some 320 feet in length. It contains the rooms used for the preparation of the specimens and for their storage, also different laboratories among which is to be noted the chemical laboratory shown in Fig. 3. Several private work rooms are set apart for the use of persons who come to consult the collections or who wish to make oceanographic researches. A special library occupies the central hall of the floor, and near by is a large photographic laboratory. The basement floors are now entirely installed, but the two upper floors which are designed for public use will not be fitted out before the building is quite finished. In this portion will be exposed the objects relating to oceanographic work, including the apparatus, the results of researches, etc. Under this head we find different types of floats and apparatus used for studying surface or deep-sea currents, sea-sounding apparatus of many kinds, and sounds which contain specimens brought up from the bottom, such as mud, sand, gravel, and even pieces of pipe inhabited by sea animals; also water flasks designed to take samples of water at a given depth at the same time as their temperature, besides thermometers, densimeters, etc., affording the observation of densities and chemical composition of different layers of water, also instruments for studying the penetration of light into deep water, etc. We also find apparatus which are designed for use in capturing living specimens, several of which have been designed or modified by the Prince or his aids. Among these are ordinary sea nets, Hensen nets, vertical nets with large opening, surface nets, and finer ones for collecting the plankton during the movement of the vessel, and many like apparatus. These will be shown either in actual or reduced size.

But the largest part of the exhibits will comprise the zoological collections taken from the sea-bottom, from the surface or from mid-water during the scientific campaigns of the Prince, especially the deep-sea specimens, for the latter have now been taken at depths of several thousand feet. Besides, the museum will not only contain the specimens collected since 1885 by the exploring vessels "Hirondelle" and "Princess Alice," but a large number of others which have been obtained by exchange or otherwise and come from all points of the globe. A large collection of maps, graphic plans, photographs, etc., will complete the series of oceanographic documents, besides a series of water-color views made from the living animals.

Referring to the general view of the building, under the main cornice of the roof will be inscribed the names of famous oceanographic exploring vessels, among others the American vessel "Albatross," celebrated in oceanographic work, besides others from different nations, such as the "Talisman," "Challenger," "Valdivia," etc. On the façade will figure the "Hirondelle" and the "Princess Alice," above each of the allegorical groups executed by the sculptor Dussart. These groups, which are 26 feet in height, represent Truth unveiling the world's forces to Science, and Progress coming to the aid of Humanity. From its bold construction and its purpose, the Oceanographic Museum of Monaco constitutes a monument, for whose erection Prince Albert I. deserves praise.—Translated for the SCIENTIFIC AMERICAN from La Nature.

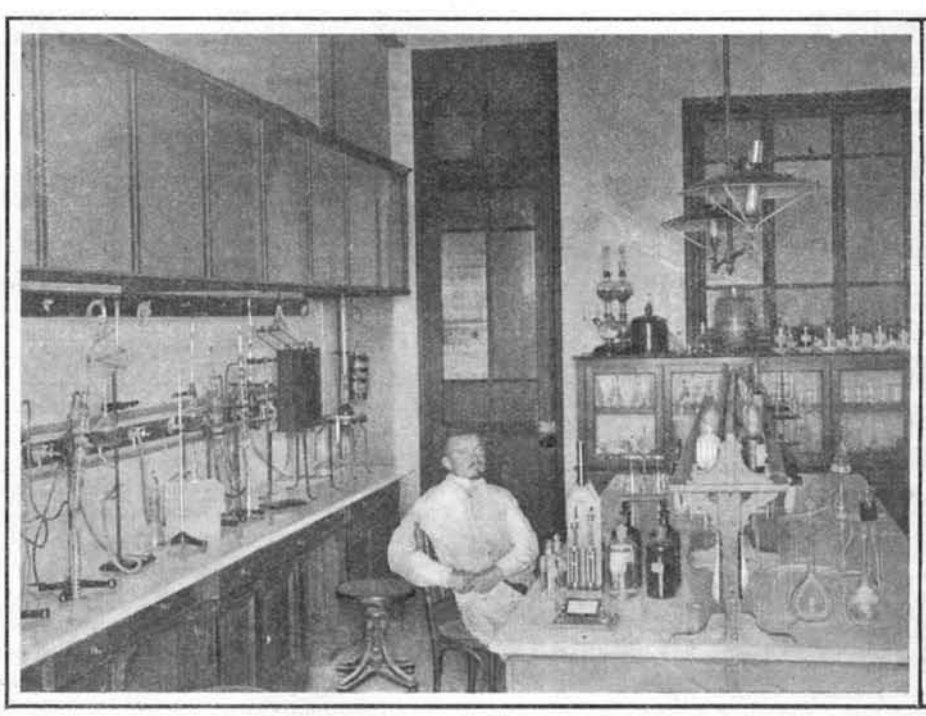

Fig. 3.—Chemical Laboratory of the Museum.

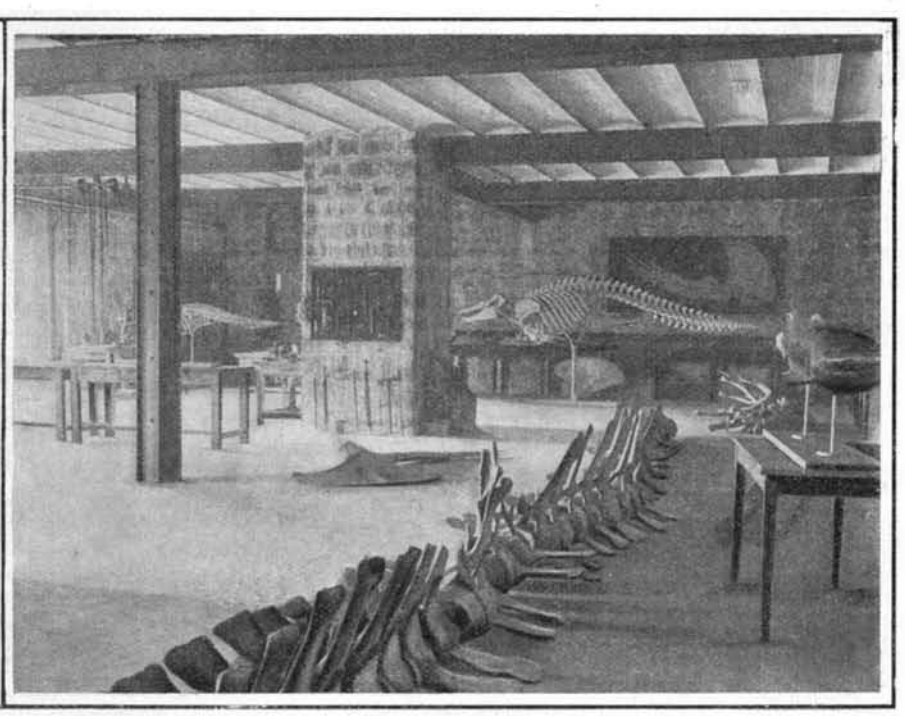

Fig. 4.—Department of Preparation.

OCEANOGRAPHIC MUSEUM OF MONACO.

WEAPONS WEIRD AND WONDERFUL.

BY LIEUT.-COL. C. FIELD.

"And he made in Jerusalem engines, invented by cunning men, to be on the towers and upon the bulwarks, to shoot arrows and great stones withal."

This text, in the Second Book of Chronicles, is perhaps the first mention of the invention of warlike instruments. It was evidently a notable event, for the writer goes on to say of Uzziah, King of Judah, who is referred to by the pronoun "he," that "his name spread far abroad." Since those days the ingenuity of man has been taxed to the utmost to contrive new and more deadly means of killing and wounding his fellow men, and science has now brought our modern weapons to such perfection that it seems almost impossible to imagine any advance in their effectiveness. If we except the cold steel—which still has its uses, if we are to judge by the recent war in the East—there are

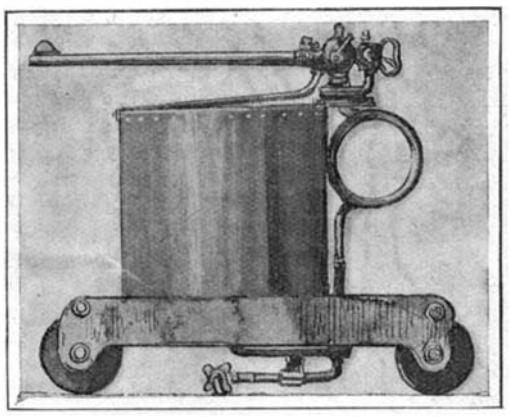

Sturgeon's Compressed-Air Gun (1888).

The Reservoir Helmet.

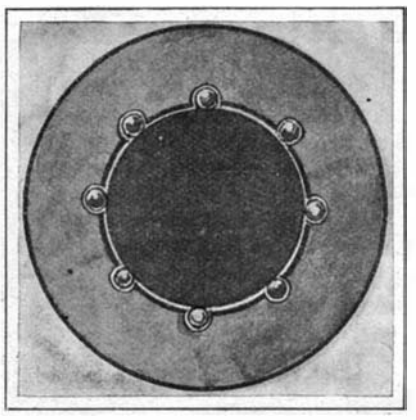

Cross Section of Ball-Bearing Gun. The Central Disk is the Shot.

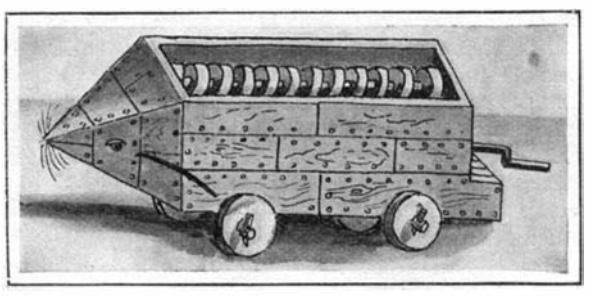

The Musculus.

but three classes of offensive weapons—the gun and its projectiles, the rifle, and the mine or torpedo. In the process of their evolution from the stone and club of our prehistoric ancestors and the "engines" of King Uzziah, an enormous number of contrivances have been invented by the fertile brains of soldiers, mechanics, and scientists. Some of these, such as the "hand gonne," Edward III.'s "crakeys of war"—the cannon he took against the Scots—and the engineer Giannibelli's "devil-ships of Antwerp," may be regarded as being the direct ancestors of the rifle, gun, and torpedo of to-day. But there have been hosts of others, which have either become entirely obsolete after a very short reign, have never "caught on," or, in very many cases, have never had any actual existence outside the plans and ideas of their sanguine inventors.

Many of these warlike appliances, especially those belonging to the middle ages, are of the most grotesque description. As at no distant date the making of hideous grimaces to strike terror into the heart of an enemy was cultivated as a branch of the military art by the troops of the Celestial Empire, so in medieval times the grotesque seems to have been considered at least as much a desideratum as the practical by the inventors of offensive and defensive weapons. So we have such extraordinary contrivances as the "machine to break the ranks of an enemy" and the other dragon-like edifice here illustrated. How the former—which appears to be a kind of medieval motor car—got over the ground, and how it brought its formidable array of spikes to bear upon those who had the hardihood to oppose its progress, must be left to the imagination. The other machine is merely a grotesque edition of the movable towers that played such an important part in the sieges of ancient and medieval cities. The one touch of progress is the cannon projecting from the wicker monster's mouth. Ancient warriors had a great penchant for naming their various warlike engines and machines after animals, real or imaginary. Thus we have the Roman "musculus," or "little mouse," a machine for undermining the walls of a besieged city, the battering ram, the sow, the scorpion for discharging big arrows from a powerful bow, the onager for hurling stones. The onager, according to tradition, was an animal that had a pleasant trick of kicking stones with great violence at its pursuers. Again, the Roman warships were equipped with a spiked gangway known as a "corvus," or "crow," which on being let fall upon an enemy's ship, grappled her and formed a bridge for boarders.

Medieval soldiers made frequent use of the "wolf" in the defense of castles and towns. This was a species of huge harrow, made of balks of timber with wooden spikes at the intersections, which set up outside the walls could be thrown down and forward to crush the besiegers as they crowded to the assault. When cannon were invented, their names became legion. A ship or a train of artillery contained a perfect zoological garden of birds, beasts, and fabulous animals. There were basilisks, drakes, dragons volant, falcons, serpents, and pelicans, not to mention "double dogs" and partridge mortars. Nowadays our bluejackets, at any rate, prefer to call their pieces "Joe Chamberlains" and "Bloody Marys."

We have of late years seen a good deal in the newspapers about the training of dogs for military purposes, such as scouting, giving notice of the approach of an enemy, and searching for the wounded. In former days this intelligent animal was also employed in warfare, not only as a watch dog. One method of "letting slip the dogs of war" was to equip them with a pot of blazing resin, a collar of spikes, and a jacket of leather scales to protect their backs from the fire, and send them among cavalry, much to the fright and confusion of the horses. An Arab writer describes some wonderful war dogs which belonged to the Grand Seignior, which he says were as big as donkeys, were clad in rich cloth, silver collars and neck rings, and a circle of iron points around the neck. Some were even clad in armor. They were equal to tackling wolves, dragons in the fire, eagles in the air, and crocodiles in the water, to say nothing of being able to bring down a man from horseback, "however stout a fellow he may be." Dogs equipped in much the same manner were also used for incendiary purposes to set villages and houses on fire, as were also cats and pigeons. Even torches for this purpose were sometimes made in the form of dragons, as will be seen by the annexed illustration, taken from an old manuscript, of a date earlier than the Conquest. This mythical beast, being supposed to breathe fire and brimstone, was of course a very appropriate animal to choose as a model.

With the advent of artillery and firearms, all kinds of queer weapons were from time to time invented. Many of them distinctly foreshadowed our modern repeating and rifled weapons. Not a few revolvers, repeaters, and rifled muskets were made in the six-

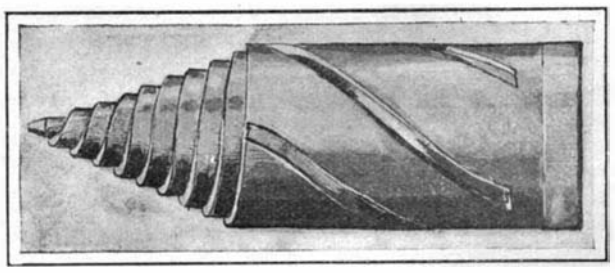

Armor-Piercing Projectile (1888).

teenth and seventeenth centuries, but as the whole affair had to be made by hand, their cost precluded any general adoption of these ingenious devices. The earliest cannon were breech-loaders, and like our modern guns were built up rather than cast. But even

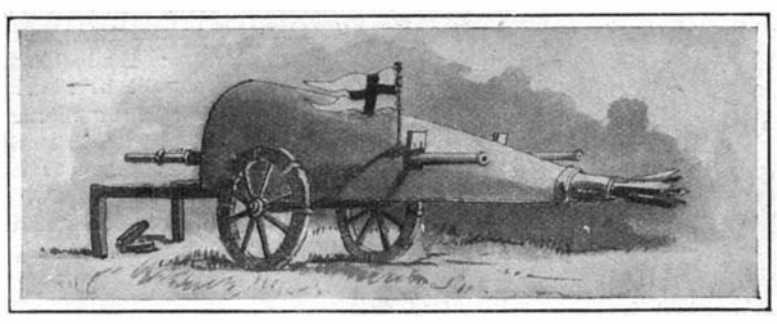

War Cart (16th Century.)

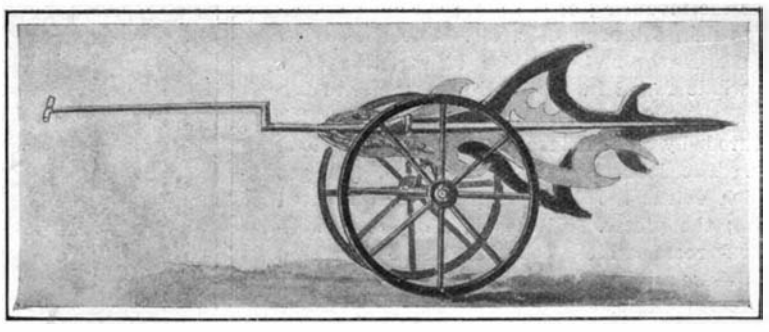

The "Lyoners" for Blocking a Lane.

smaller pieces were generally made to load at the breech. Here are a couple of such weapons mounted in a kind of cart. These were used by Henry VIII. against the Scots, and would appear to have been quite practical little affairs. They evidently could be wheeled like hand-barrows; the sloping shield would afford excellent protection to the gunners, and probably contained a receptacle for ammunition. The flag and bundle of spearheads strike us as being somewhat superfluous. War carts or chariots were not unusual at this time, especially in Germany. They generally took the form of a rude machine gun, several musket barrels being placed together in the center, and a great array of curly, murderous-looking spears and halberds arranged on either side. The Lyoners is a later type without musket barrels and intended for blocking a narrow passage. Sometimes a whole sheaf of musket barrels were fixed upon a stand or carriage. These contrivances were called orgues, from their resemblance to the pipes of an organ, or sometimes thunder carriages.

Monster cannon were an early form of extravaganza in military weapons. There are several accounts of such pieces of ordnance. A traveler in 1743 stated that he had seen at Brunswick a gun or rather mortar cast in 1411. It was made of brass, was 10 feet 6 inches long and no less than 9 feet 2 inches in diameter, and was said to be capable of throwing a 1,000-pound shell. India boasted several of these monstrosities. One still to be seen at Kubberpore is said to be no less than 21 feet 3 inches long and 5 feet 6 inches round the muzzle. It is called "Jaun Kushall," or destroyer of life, by the natives, and was probably cast somewhere



Pistolet à Reveil.

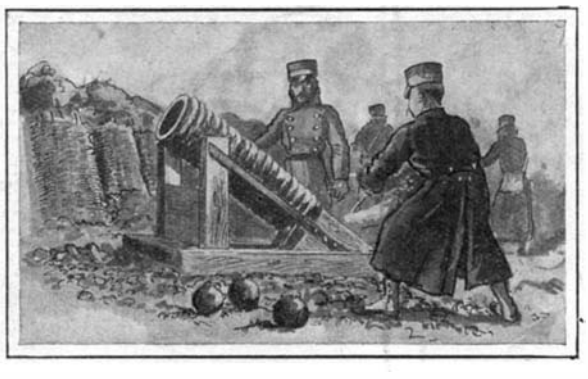

Japanese Wooden Mortar (1905).

in Persia. Another Indian piece, cast by Chuleby Koomy, Kahn of Ahmednuggeer, about the year 1500, has such a tremendous bore that the interior is now fitted up as a kind of summer house. A cannon made at Bruges in 1346 had a square bore and fired cubical shot. Guns were made of all kinds of materials, though all such may be regarded as freaks or experiments. The leather guns invented by an officer in the army of Gustavus Adolphus had a certain vogue on account of their lightness. Some were effectively used against us by the Scots under Gen. Leslie at the battle of Newburn Ford in 1640. They were made by wrapping rope and twine round copper cylinders strengthened by iron rings. They were then coated with plaster, and finally covered with leather. They were very portable, but unreliable and short-lived. Guns have been made of wood hooped with iron, not only in ancient times, but quite recently in the Philippines, where they were used against the American troops. The Chinese had a gun made of bamboo in 1259, but only the other day the Japanese were making effective use of wooden mortars bound round with bamboo for throwing explosives into the Russian works at the siege of Port Arthur. Guns have been made of glass, and even of ice. Some of the latter, made for saluting purposes at the marriage of the Russian Prince Gallitzi in 1739, are stated to have been "fired more than once without bursting." Guns have even been made of the precious metals. In 1663 there was in the arsenal of Verona "a great gun found in Candia, all of gold and silver." A golden cannon was captured at Peking in 1860, and King Thebaw of Burma was the possessor of another, which was also incrusted with precious stones. This is the kind of weapon one would like to have a hand in capturing. The early caliver was little inferior to a cannon in clumsiness, as it took three men to carry it and a fourth to fire it. When firearms became somewhat more portable, and especially when pistols were introduced, we find them mounted in the most extraordinary fashions. Shields or targets not infrequently had a pistol fixed in the center with a small grating for aiming through, but there is an account of a shield at Genoa which had an extension reaching to the elbow, and a dark lantern affixed to the outside, a somewhat similar idea to that patented by an American two or three years ago. This is a revolver having a tube underneath the barrel, containing a small electric light. On beginning to press the trigger the light is switched on, dazzling the "enterprising burglar," and enabling the householder

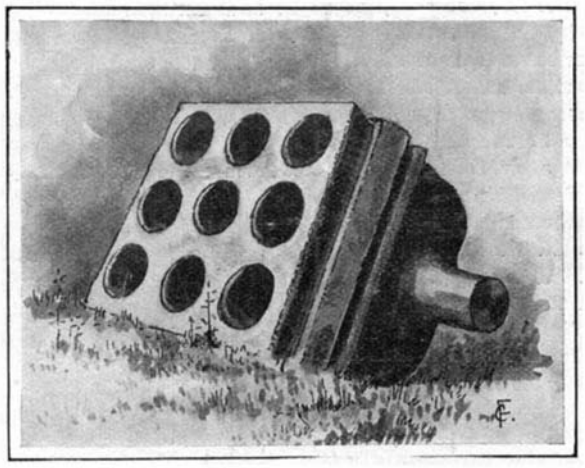

Curious Mortar Now in the Tower of London.

to select a point to aim at. Another surprising medieval contrivance was an iron hat or helmet, which is described as having "two crowns, each with four pistols." A volley of eight shots from an opponent's headpiece must have been very disconcerting—probably to all parties concerned. A curious mortar in the Tower of London is square in front and has no less than nine separate bores. The eighteenth century was distinctly the epoch of sieges. The attack and defense of carefully-fortified places was carried out in the most methodical and patient manner. Who does not remember the prolonged discussions between Uncle Toby and Corporal Trim about the siege of Namur? Do they not remind us of a discussion between whist players? Everything was done by rule. Naturally, there were

the way in which this was done. The figure in the foreground looks as if he might very shortly be "the engineer hoist by his own petard," immortalized by Shakespeare. Another device was the "pot-à-feu," or fire pot, which was a kind of ball or globular jar filled with old tarred rope, which was thrown upon the enemy's works, to light them up at night and enable fire to be directed upon them. Loaded pistol barrels were attached to these, to prevent anyone from picking them up and extinguishing them. The "pistol à reveille" could be set to explode a mine at a given hour. But all said and done, we need not dive into the past to find extraordinary ideas and weird warlike appliances. Our modern inventors are quite capable of keeping up the supply. Leaving aside the steam guns, which were intended to spurt out streams of bullets after the fashion of a Maxim gun, which were invented by Perkins in 1824, by Winans in the sixties, and the very similar compressed-air gun patented by one Sturgeon in 1887, none of which realized its inventor's expectations, we can find plenty of extraordinary contrivances. The wire bullet-proof screen, behind which the soldier advancing to the attack defies any projectile smaller than a three-pounder, is as far-fetched an idea as anything produced in the middle ages. The reservoir helmet, a French scheme, is about as quaint as anything we have noticed. The lower part of this eccentric headpiece forms a species of tank or reservoir, into which the water (and pipe clay?) drains from the upper surface of the helmet. The soldier's head is therefore kept cool in the tropics—though the weight may perhaps be rather trying—and when a-thirst all he has to do is to remove his helmet and fill his cup from the tap at the back. This has not hitherto "caught on." It is just possible, though not probable, that the Russians might have found the revolving shield illustrated an efficient defense against the bullets of the Japanese. It is not easy to see how it would compare favorably either in weight or portability with an ordinary steel bullet-proof shield. This egregious apparatus consists of a pillar or standard, on which is mounted a set of fans or sails, which are revolved at a terrific speed by a small motor actuated

Dragon Incendiary Torch (9th Century).

Wire Netting, Bullet-Proof Shield.

The Electric Fan Shield (1903).

no less than 120 pistols connected with it. Rather a heavy affair to handle, one would imagine. The Emperor Charles V. had a curious shield, which he carried when walking about at night; "a spear came out of the side of it, besides that in the middle; if any thrust was made at the shield, the sword's point was catched in it and broken." A target "made in Germany" had many inventions at that time specially applicable to the attack and defense of fortified towns. The petard was much used. It consisted of a bell-shaped iron receptacle filled with powder, and clamped down to a block of hard wood. It was intended to be fixed to doors and gates for the purpose of blowing them in. The accompanying reproduction of an old print shows by a portable battery. After switching this on, all bullets which might have otherwise found a billet in the soldier crouching behind this catherine wheel, are struck and deflected elsewhere by the rapidly-revolving blades or fans.

One of the most important qualifications of a good soldier is to be able to march well, but it is doubtful

Machine to Break the Ranks of the Enemy.

Spring-Heeled Jacques.

A Dragon for Attacking Towns.

WEAPONS WEIRD AND WONDERFUL.

whether the wearing of a pair of spring-soled boots, such as a recent inventor has suggested, would add many miles to the day's march. These "seven league boots" have an outer sole, which is pivoted to the one made on the boot just below the ball of the foot. A strong spiral spring is fitted between the two at the heel. To see a whole regiment charging a position wearing these boots, and bounding over the ground like kangaroos or wallabys, would indeed be a remarkable sight. The boring projectile here illustrated appears a somewhat more plausible creation, but the inventor can have very little realized the immense force and velocity with which modern projectiles strike their objective. Imagine a shot weighing over 800 pounds traveling over 2,000 feet a second, and striking with an energy of thousands of tons to the square foot, pausing in its career to carry out the comparatively slow process of boring through an armor plate like a gimlet! The Cullen ball-bearing gun is another extraordinary attempt to improve modern artillery. The sketch of its cross section will enable the reader to understand the idea, which, put shortly, is to substitute for the ordinary grooves of a rifled gun, through which the soft metal of the diving band has to cut its way and so give a rotatory motion to the projectile, a series of spiral rows of steel balls. These lie in grooves of a circular section cut in the sides of the bore of the gun, into which about one-twentieth of their diameter projects, so that while a spiral motion is given to the projectile, its progress is not retarded by friction, but rather accelerated. How the inventor is going to prevent the waste products of the combustion of the propelling charge from being driven into the interstices between the steel balls and jamming them all together, so that they revolve with difficulty, does not appear. The absurdity of the scheme was exposed by the Scientific American several years ago. Another remarkable invention, which like the preceding one, by the way, hails from America, is a cannon that takes completely to pieces. It consists of a series of strong steel disks which fit over the inner tube, which is, of course, rifled internally. Externally it tapers slightly, so that it is bigger and thicker at the breech end. The disks slide down on this tube in their proper order, the central ones having projections to form the trunnions of the piece, and are screwed tight up by means of four rods and nuts fitting into a massive framework at either end of the gun. The rear one of these carries the breech-closing mechanism. Invisibility has been pretty well secured by the invention of smokeless powder, and now inventors are trying to do away with the noise of the explosion into the bargain. This was effected in ancient days, according to an Arab writer, by the "powder which explodes without sound," made at El Meidaun, the ashes of human bones taking the place of charcoal. The making of this propellent is now, at any rate, a lost art, but the same object is, to a certain extent, attained in other ways. Col. Humbert, of the French army, has invented a species of tube which, affixed to the muzzle of a field piece, prevents either flash or sound, while a rifle invented in America has a big cartridge containing water, which interposes between the bullet and the powder charge in its base. This is supposed to regulate the escape of the powder gas, and so minimize the report without diminishing the force and velocity with which the projectile leaves the barrel. The great addition which this system would make to the weight of the ammunition is quite enough to put the weapon out of court for military purposes.

With this quite recent triumph of impracticable invention we must bring our short review of extraordinary military contrivances to a close. Myriads of other warlike "freaks" might be cited, but we have quoted enough to make it obvious that, as far as they are concerned, the process of "beating our swords into plowshares" might begin without in any way bringing in the epoch of universal peace. The practical weapons that would remain are amply sufficient to provide "battle, murder, and sudden death" for many centuries to come.

Beans are at present cleaned by hand work, which is not only slow, but unsatisfactory. The beans are scattered on a belt which passes before a row of girls, and stones, dirt, and other objectionable particles are picked out. In this way the cleaning capacity of each girl is between three and five bushels per hour. A machine for this purpose has been recently invented by Robert A. Little, of Lockport, N. Y., which performs the operation in a much superior and more economical manner. In this process the beans fall from a height into a shaking hopper, and here the chaff and lighter material are removed, after which the mass is transferred to a belt, where the foreign particles are carried one way and the whole and perfect beans are diverted to a compartment, where they are subjected to the action of an air blast. This not only removes all trace of dust and dirt, but gives the beans a high polish, which improves their selling qualities.

THE MICROPHOTOSCOPE—AN APPARATUS FOR EXAMINING MINUTE MAPS.

BY DR. ALFRED GRADENWITZ.

The importance of an efficient intelligence service in time of war will be readily appreciated by anybody. The most important element in similar service is a suitable stock of reliable maps, but even in case first-class maps are available, many drawbacks will be experienced, especially at night and during storms and rain, in using ordinary maps of the Etat Major; and the same may be said of maps intended for the use of tourists and sportsmen. The folding of large maps is moreover extremely inconvenient, and results in a rapid wear and tear of the same.

A very suitable device to obviate the above inconveniences has been invented by Dr. Otto H. F. Vollbehr, of Halensee-Berlin, in the shape of the microphotoscope. Though not doing away entirely with the necessity of ordinary maps, this device will afford a most welcome complement to them. With this aid microscopic transparencies 4 x 5 centimeters (1.574x1.968 inches) in size are used in place of large maps. These represent a map of the Etat Major drawn to the scale of 1-100,000. They are inserted between two glass binding plates, so as to form a lantern slide. In front of the transparency there is a lens capable of being adjusted for any eye by turning it either to the left or right. No other eyeglass should be used in connection with the lens. The latter is fitted in a small frame susceptible of a vertical and horizontal displacement, so as to enable any point of the transparent map to be brought immediately in front of the eye, 175 square kilometers (67.56 square miles) being inspected with each position of the lens. The minute map is divided into squares at distances of 2.5 kilometers (1.55 miles) each, the squares being numbered horizontally at the top of the map and marked with letters in a vertical direction, thus enabling any given point to be traced readily. The slides fit loosely in the holder and they can be exchanged at a moment's notice whenever another map is to be examined.

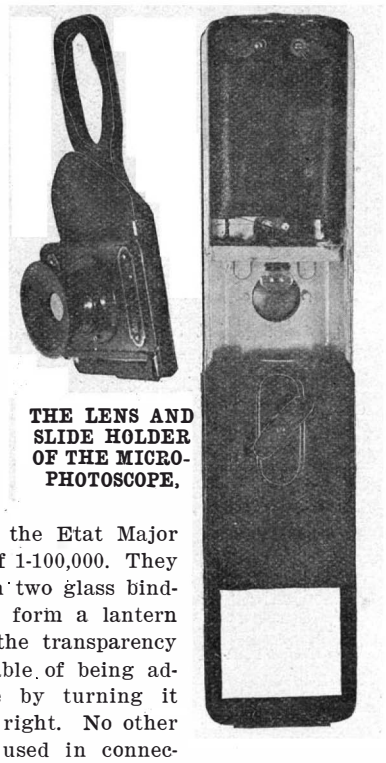

THE LENS AND SLIDE HOLDER OF THE MICROPHOTOSCOPE.

If the lens is used in the daytime, it should be held with the handle in front of the eye, when an intensely illuminated image of the map will be obtained, so that even the smallest lines and most minute marks will be readily distinguished. For use at night an especially designed illumination box is added, including small electric light similar to the familiar "ever-ready" lamps. This box can be attached to the back of the apparatus, where it is held in place by small clips. By pressing a button a small glow lamp is lighted. This lamp illuminates the transparent map about as intensely as does daylight, and thus the lamp can be used in dim weather if more light is needed.

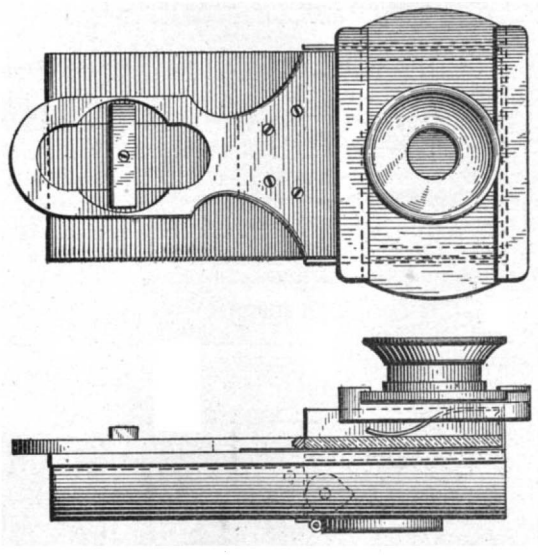

TOP AND SIDE VIEWS OF THE LENS MOUNTING.

The latest type of apparatus has been arranged for keeping the button pressed down permanently, thus avoiding a continual pressure on the same. A reserve battery is provided for supplying the amount of light required for twelve hours' uninterrupted service of the glow lamp, this battery being worn like the cover of a field glass. The transparencies have recently been improved by marking any waterways in a blue color.

A Novel Photometer.

The numerous attempts so far made to utilize the luminous sensitiveness of selenium for the construction of a suitable photometer have now for the first time been crowned with success, in connection with a novel selenium photometer brought out by a Mayence constructor, which is quite independent of the inertia of the selenium, the temperature of the air, and the load on the selenium cell, as well as of all other factors disturbing the sensitiveness of the selenium. The slow alteration undergone by the selenium cell in course of time is doubtless without any influence on the tests. The accuracy insured in using this apparatus greatly exceeds the accuracy afforded by any similar photometrical process, while the tests are carried out more rapidly and without any difficulty.

The novel principle used in constructing this photometer consists in throwing a selenium cell in a rapid alternation from the range of a standard lamp into the range of the lamp to be measured, the resulting current oscillations being ascertained by suitable instruments. As soon as the oscillations of an index are discontinued, the illumination produced on the cell by both of the illuminants is found to be equivalent.

The apparatus includes two mirrors lighted by the two illuminants respectively, while a selenium cell rapidly oscillating between two given positions is lighted alternately by either. The index of an ammeter oscillates in accordance with the fluctuations in illumination thus produced, and the instrument should be displaced until these oscillations are found to cease, thus showing the equivalence of the illuminations due to either lamp, when their respective distances from the photometer will, according to a well-known rule, give the luminous intensity of the lamp to be tested in terms of the standard lamp.

This photometer is intended in the first place for the comparison of illuminants of the same class. One good point of the apparatus is the rapidity with which measurements are carried out. Moreover, the eye is put to far less strain than in any other method of testing. The instrument will be found useful in connection with scientific investigation into the hitherto unknown mechanism of the sensitiveness shown by selenium in regard to light. Our present knowledge does not go far beyond the fact that two of the allotropic modifications of selenium, and especially the light-gray brittle variety, show a decrease in electrical resistance as soon as they are exposed to an illumination, this decrease being dependent on the luminous intensity of the latter.

As regards the influence of considerable differences in color between the two illuminants, selenium seems to behave very well with the luminous sensitiveness of the eye in regard to the same color. It thus seems likely that no errors worth mentioning will be made in practical tests, and it is surmised that the retina of our eye perceives in the same way as selenium, while such differences as have been found from time to time are attributable to the absorption of rays by the liquid and other membranes of the eye. A suitable compensation could thus be obtained by inserting in front of the selenium cell an optical medium equivalent to the substances lying in front of the retina.

Free Winter Course in Dairy Farming.

The Massachusetts Agricultural College offers without charge for tuition a general course of instruction in the management of a dairy farm and in dairy operations. This course begins January 2 and continues ten weeks. It is open to all citizens of the United States above sixteen years of age.

Students taking this course enjoy the great advantage of a systematic, thorough, and short course of training under recognized experts. The subjects taken up are soils, manures, fertilizers, and crops, the breeds and breeding of dairy stock, the feeding of dairy animals, stable construction and sanitation, prevention and treatment of the common diseases of stock, dairy products, their general characteristics and the laws of milk production, pasteurization, elementary botany and entomology, and general horticulture. Students receive careful training and extensive practice in the use of separators, making the Babcock test, and in butter making.

All wide-awake communities are demanding better dairy products. Students taking this course learn how to make the necessary improvements in methods of production. The demand for farm superintendents is great, but only up-to-date superintendents are wanted. Those taking this course are able to learn the latest methods. Any one desiring information concerning the course should address Prof. William P. Brooks, Amherst, Mass.

The largest marine gasoline engine in the world has been shipped from Baltimore to Russia. It is of 1,600 horse-power, and is one of four ordered by the Czar's government, at a cost of $100,000, to go into Lake submarine torpedo boats.

BIRDS OF AN OCEAN ISLAND.

BY B. S. BOWDISH.

It is a significant commentary on the relations that man has established with the birds, that the almost universal experience of naturalists exploring uninhabited and seldom visited islands, shows that where for generations bird life has existed in ignorance of man, the birds exhibit little or no fear of him. So accustomed have we become to the display of fear of man and keen efforts at self-preservation on the part of our little feathered brothers of the thickly-settled portions of the world, that it seems unnatural to find birds displaying no such caution. Yet we have abundant evidence that fear of fellow creatures is born only of bitter experience, either in the present or a past generation. In Porto Rico the grackle (*Quiscalus brachypterus*) clambers fearlessly on the legs and tails of cattle, seeking the pestiferous flies and vermin, while the animals, apparently realizing the benefaction that the birds are performing, stand quite still. This habit has also been ascribed to our own cowbird, from which the bird has derived its name. A small species of old-world plover enters the mouth of the crocodile quite unconcernedly, to relieve the reptile of vermin infesting it. As surely as this fearlessness of fellow creatures is born of confidence in their peaceable intentions, so surely is universal fear of man where he is known born of all too well-founded suspicions of his intentions.

To the nature lover there are few, if any, experiences that can compare with those of a visit to one of those wild islands where man's influence on nature has never made itself felt. Walter K. Fisher has given a very interesting account of a visit to the Windward group of the Hawaiian Islands, on the Fish Commission's steamer "Albatross," engaged in deep-sea explorations. As is usually the case at such islands, the birds were found remarkably fearless as compared with our own birds, and Mr. Fisher secured a series of pleasing and interesting photographs. These represent birds in their home life that are unfamiliar to most people. As might be expected in such a situation, sea birds were much more numerous in species and individuals than were their fellows of the land. One of the most abundant, conspicuous, and interesting of the feathered inhabitants of these islands was the Laysan albatross. Besides being found in great numbers, the bird is large and of striking appearance and exceedingly interesting in habits. At the time of Mr. Fisher's visit these birds had young about two-thirds grown, and nearly every tussock of the grass that abounds on Laysan Island afforded shelter from the heat of the sun to a young albatross, which sat awkwardly on its heels dreaming until some one passed too near, when it snapped its bill fiercely. In most cases this demonstration was found to be largely "bluff," and the naturalist succeeded in stroking them while they mildly objected. If, in rushing about, the young birds stumbled into the burrows of the petrels, they tumbled forward heavily, which usually resulted in their disgorging their food, much to their chagrin.

It was found that the old birds had no apparent objection to the presence of man, and one could walk among them without disturbing them in the least. They objected, however, to such undue familiarity as handling, and were apparently greatly astounded when, in backing away from the intruder, they collided with a tussock of grass. They exhibited curiosity over the strangers, however, and one was particularly interested in the bright aluminium head of the tripod, which he examined and tested with his beak.

The old birds lived in absolute harmony, but the young had some small squabbles, and the parents often seemed to have a strong aversion for another bird's chick. The birds have a "game," which seems to be explained only by a desire for recreation. "Two albatrosses approach each other, bowing profoundly, and stepping rather heavily. They circle around each other, nodding solemnly all the time. Next they fence a little, crossing bills and whetting them together, pecking meanwhile, and dropping stiff little bows. Suddenly one lifts its closed wing and nibbles at the feathers underneath, or rarely, if in a hurry, merely turns its head and tucks it under its wing. The other bird during this short performance assumes a statuesque pose, and either looks mechanically from side to side or snaps its bill loudly a few times. Then the first bird bows once and, pointing its head and beak straight upward, rises on its toes, puffs out its breast,

Black-Crowned Night Heron.

and utters a prolonged nasal groan, the other bird snapping its bill loudly and rapidly at the same time.

"Sometimes both birds raise their heads in air, and either one or both utter the indescribable and ridiculous bovine groan. When they have finished they begin bowing at each other again, almost always rapidly and alternately, and presently repeat the performance, the birds reversing their role in the game or not. There is no hard and fast order to these antics, which the seamen of the 'Albatross' rather aptly called a 'cake walk.' . . . Occasionally one will lightly pick up a twig or grass straw and offer it to the other. This one does not accept the gift, however, but thereupon returns the compliment, when straws are promptly dropped, and all hands begin bowing and walking about as if their very lives depended upon it." Mr. Fisher adds that when he approached a pair of birds engaged in this game, they would cease their play and walk away in a deprecating manner some little distance, to resume the game. It is said that if a person enters a group of birds that have been engaged in this diversion and bows, they will sometimes walk around him bowing in return.

The young birds are fed by regurgitation, inserting their bills crosswise in the bill of the parent. Each bird hatches and raises only a single young one. Like many of the large seabirds, and particularly members of this family, this bird roams over vast areas when not engaged in breeding.

The terns of the Hawaiian Islands come closer home to most of us, for while not the same species as the terns of our coast, they are nearly related. All species are beautiful, graceful birds, and it is a sad thing that a desire on the part of gentle woman to herself wear their plumes, and a love of "sport" on the part of man, have almost stripped our coasts of these dainty creatures.

The carelessness of the tern in the matter of nest building reaches its extreme in the white tern of these islands. In several instances the egg was found laid on a bare limb; otherwise it might be laid on the phosphate rocks, but nowhere with any pretense of nest building.

Besides the white terns there were also found noddies and Hawaiian terns. The writer remembers many pleasant experiences while making the acquaintance of the noddies on wild little Decicheo Island thirty miles from Porto Rico. Here birds were almost undisturbed by man, and many of the noddies, a few bridled terns, large numbers of common boobies, and a few laughing gulls made their homes. The terns here built no nests, although there were plenty of bushes, but nested in most cases on the bare ledges of rock. It is an indescribable experience to be among the homes of these birds, to see them almost at arm's length, performing their various household duties, and a spectacle never to be forgotten. One who has once enjoyed it will never feel like sanctioning the destruction of the tern colonies on our coasts.

In the Hawaiian Islands Mr. Fisher found the noddies building nests in the bushes, which, I believe, is the rule with the birds in most places where they breed.

Two of the birds that inhabit these islands are the shearwaters and petrels. These birds belong to the order known as tubinares or tube-nose birds, from the tubular form of the nostrils. Both excavate burrows, in which the single egg is laid and the young reared. The wedge-tailed shearwater makes only a pretense of a burrow, in many cases not sufficient to hide the sitting bird, while those of the white-breasted petrel are six feet and more in length. The burrows of the petrels were found close together, and the birds occupied all available space in the nesting territory. Both petrels and shearwaters are most active at night, and often remain at or near their burrows during the daylight hours.

The writer yet recalls how through a powerful glass, from Aguadilla, P. R., he watched the movements of a cloud of birds hovering about Decicheo Island, thirty miles distant. They were not, of course, identifiable at that distance, but when later an opportunity afforded to visit the island, the birds that had been watched so eagerly proved to be boobies, and it was one of these which was the first bird to welcome the boat, when, just as daylight was dawning, he came sailing out, looking like a gigantic duck as he took a turn over the boat and bent his neck to inspect its contents. On Decicheo the common boobies vied with the noddies as the birds of greatest numbers. The blue-faced and red-footed boobies, though sought for, were not found. While the birds are rather clumsy in appearance on land, they are far from being so on the wing. Lacking the dash and arrow-like grace of the man-o'-war bird, they are easy and untiring on the wing, nevertheless, and when skimming the waves in pursuit of their prey, they fly into and out of the water with an ease that puts to shame the labored movements of the pelicans. In the Hawaiian Islands Mr. Fisher found the blue-faced and red-footed boobies far more abundant than the common booby. In speaking of the blue-faced booby, he says: "The boobies appear to exhibit affection for their young. I have seen them gazing at the fuzzy-white ball with evident pride in their otherwise stolid countenances, and on one occasion saw an old bird carefully lay dry sedge over the exposed and not too heavily feathered hind parts of the young."

It was noted that although two eggs were laid, in very few cases did more than one hatch, and in these cases only one young survived. In this species the eggs were laid on the sand, with little or no pretense of a nest, while the red-footed booby constructed a

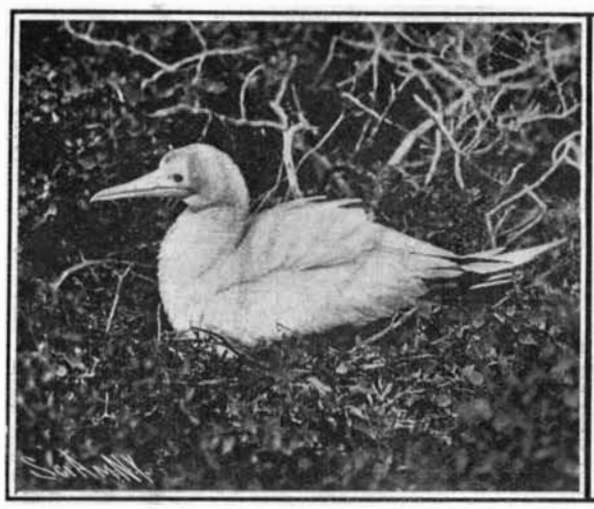

Red-Footed Booby (Sula Piscator) on Nest.

Sooty Tern About to Leave the Nest After Laying an Egg.

Miller Bird and Nest.

BIRDS OF AN OCEAN ISLAND.

rude platform of twigs in the bushes. The latter birds take turn in incubating, and Mr. Fisher says "are rather loath to leave their egg, when disturbed ruffling their feathers and uttering a hoarse cry, making use of their bills if occasion offers. They are singularly beautiful despite their vicious yellow eyes, as their white plumage is set off by bright blue skin about the bill and by the coral-red feet."

Of the few species of land birds found on these islands, two represent two large families, the one a finch and the other a warbler. The Laysan finch like the other birds found there was fearless and unsuspicious. They were found everywhere, singly and in small flocks, searching for food both among the bushes and in open places, and ignored the presence of man as long as they were undisturbed. They were observed to eat "soft parts of grass stems, tender shoots of bushes, seeds, and especially eggs." A pair were observed to attack a tern's egg as soon as the owner left, which they opened and started to eat, while a camera was being adjusted close by, being presently driven away by a rail, which in turn appropriated the egg. While Mr. Fisher was preparing specimens, one of these finches lit on his table and explored his implements. These birds were found to be very good songsters. Their nests were usually built in tussocks of grass.

The warbler, known locally as miller bird on account of its fondness for these small moths, was one of the most abundant of the land birds on Laysan Island. As is the case with most birds, it was found to be most active during the cool morning and late afternoon hours, and at such times was quite musical. Like the other feathered inhabitants of the island, these birds were fearless, and photographs were secured without camera or operator being concealed. The bird seemed always busy in the search for millers, which it caught in the grass with great dexterity, and it hunted about, and even in, the house. It also secured caterpillars and other insects. The nests were built in the middle of a clump of grass, and the white feathers of the albatross were used for a lining.

It would seem that the success with which observations of the birds are conducted, in places where they have not learned to distrust man, and the pleasure to be derived from such familiar intercourse with them, would suggest the establishing of very different relations between man and bird than now exist in the settled portions of the world.

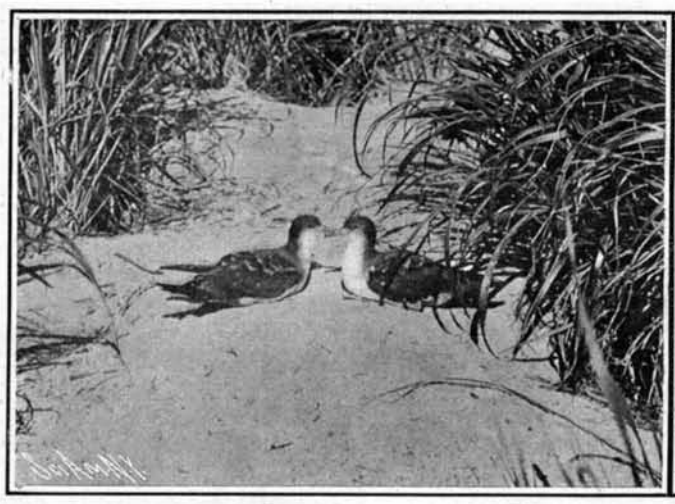

Wedge-Tailed Shearwater in Close Converse.

Laysan Finch and Nest.

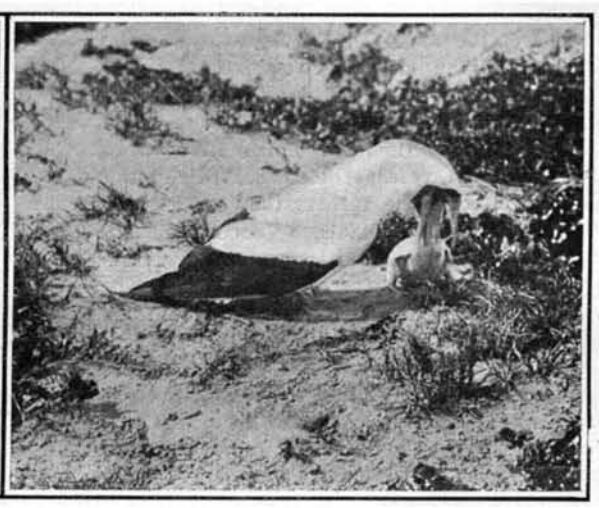

Blue-Faced Booby Feeding Young.

A Projected Observatory and Nautical Museum for New York.

Prof. Charles Lane Poor announces that Frederick G. Bourne, Cornelius Vanderbilt, and several other well-known men of New York have agreed to found the New York Observatory and Nautical Museum, to provide an endowment for the proposed institution, and also to purchase all the instruments and apparatus that will be required to make the New York institution one of the best equipped in existence.

"In accordance with the customs prevailing, the New York Observatory and Nautical Museum will establish various degrees of membership by which the citizens of New York who may be interested in the general work of the museum or in some particular line of investigation may become allied with it and contribute toward the support and maintenance of its scientific reputation. Special arrangements will be made whereby officers of the United States Navy, the United States Marine Corps, the Revenue Service, and the Merchant Marine may become affiliated with and entitled to the privileges of the institution during their active service.

"The principal aim of the institution," in the words of Dr. Poor, "will be to investigate all problems arising in transportation by water, especially in the careful study of all matters which tend to increase the usefulness and importance of New York city as a maritime port. Some of these problems, such as the study of the tides and currents, and the development of harbor facilities, are a part of the functions of the national government, but with so many thousands of miles of ocean, lake, and river coast to chart, buoy, and light, the federal government cannot always adequately examine and study the local conditions that affect the efficiency of any one port.

"The safety of ships at sea depends upon the accuracy of their navigating instruments, upon the adjustment of their compasses, the reliability of their sextants, and the rating of their chronometers. The master of an English ship can by the payment of a small fee have his instruments tested under government supervision, his chronometers rated at Greenwich, and his sextants standardized at Kew, but in this country there is no place where the navigating instruments of an American vessel can be scientifically investigated and adjusted. The vessels of the navy have the Naval Observatory at Washington, but the vessels of the merchant marine have to depend upon the honesty and skill of the instrument maker.

"The observatory to be established would aim to have a bureau for the standardization of instruments, where, upon the payment of a reasonable fee, the navigating instruments of any vessel in the port of New York would be investigated and adjusted, and a reliable 'certificate of inspection' furnished.

"Methods of rating chronometers and standardizing instruments depend on astronomical observations and calculations, hence the institution must be equipped with a complete astronomical observatory. New York alone of all the great cities of the world is without an observatory of any kind or description worthy of the name. Boston has the Harvard Observatory, Chicago the Yerkes, San Francisco the Lick, Philadelphia the Flower, Washington the Naval, Paris the Paris, London the Greenwich, and Berlin the Potsdam.

"There are in existence to-day fifty-three telescopic lenses of fifteen or more inches in diameter, and of these fourteen are in the various observatories of the United States. An astronomical observatory, irrespective of its necessity as an adjunct to the nautical museum, must and would be of great interest and benefit to the New York public generally.

"The New York observatory, when completed, will contain a fairly large equatorial lens for public use and instruction. It is planned that this telescope shall be open to the public two or three evenings each week. The other instruments, those for purely scientific work in connection with the work of the institution, will be located in small buildings separated from the main observatory. The plans for the various buildings of the institution have been made, the main building of the group being that of the museum, which is to be 320 feet long, 48 feet wide, and three stories in height.

"In the museum will be collected and exhibited models of all types of vessels, safety and signal devices, nautical instruments, and methods of determining positions, charts, historic instruments, and relics. The museum will be open to the public and so arranged that properly qualified persons can avail themselves of the facilities offered there for investigation and research."

Isolating Radio-Thorium.

A method of isolating radio-thorium from thorium salts is described by Messrs. G. A. Blanc and O. Angelucci in the Atti dei Lincei. When sulphuric acid is added to a solution of thorium nitrate containing barium chloride no precipitate is formed in the cold solution, but on warming, part of the barium is precipitated as sulphate, the precipitate carrying down some of the radio-thorium. The sulphate is converted into carbonate by fusion with sodium carbonate, and the product, after thorough washing, is dissolved in acid; on adding ammonia a slight precipitate of radio-thorium is obtained, which has an activity about 5,000 times as great as thorium hydroxide in a state of radioactive equilibrium.

In his address to the Chemical Section of the British Association Prof. Wyndham Dunstan remarked that the production of rubber by chemical means had been virtually accomplished by its formation from isoprene.

Red-Footed Booby in Nest.

Hawaiian Noddy in Its Nest.

Hawaiian Tern Alighting on Its Nest.

BIRDS OF AN OCEAN ISLAND

RECENTLY PATENTED INVENTIONS.

Pertaining to Apparel.

TROUSERS-SUPPORT.—R. F. PARRIS, Bath, Maine. One purpose of this invention is to provide a supporting device for trousers which may remain an integral portion of the waist-band-section of the trousers and which may be hygienic, supporting the weight of the trousers from the hips solely and not from the waist, which is customary when the belt is employed. Suspenders are dispensed with.

GARTER.—D. BROADBELT, New York, N. Y. In Mr. Broadbelt's patent the invention relates to garters and the like, his more particular object being to produce a type of garter in which there is a laterally-resilient portion which may be extended or contracted at will, and provided with a longitudinally-resilient elastic portion which may be extended and of itself returns to its original shape.

Electrical Devices.

MAIN-LINE SOUNDER.—J. H. KIDNY, Lisle, Mo. The more particular object in this improvement is to produce a type of sounder adapted for use directly upon the main line and taking the place of both relay and local circuit. To this end the invention relates to improvements in construction whereby comparatively delicate currents upon the main line may cause the instrument to produce comparatively loud sounds.

Of Interest to Farmers.

FOLDING DRAFT-TREE.—G. W. WALKER, Bushnell, Ill. A folding draft-tree is provided for sectional harrows so constructed that when in use it will be as strong as the ordinary single-piece draft-tree and so that in a short time and but with little trouble the end sections may be folded up above the central section and in direction of each other, reducing the longer tree to such simple dimensions and compactness that it can be taken through an ordinary farm-gate.

FERTILIZER-DISTRIBUTER.—J. K. GOURDIN, Pineville, S. C. This distributer is adapted for discharging the fertilizer broadcast and in varying quantities. The invention is embodied in an improved construction and combination of a grooved and ribbed drum which revolves with the axle and adjustable feed-regulating slides which coact with the drum.

Of General Interest.

AUXILIARY RUDDER.—W. M. TAYLOR, Mecklenburg County, Va. Means are provided by this inventor that bring the vane in parallelism with the direction of movement of the water, so that there is no resistance thereon, and the vane may be swung inwardly into its recess, retaining it in parallelism with the side of the hull and with the direction of the force of the water. Means incline the vane so that the force of the water acts upon the outer side thereof, thus assisting in the closing of the same.

BOTTLE.—E. M. SMITH, JR., Canton, Miss. In this invention the object is to provide a bottle with means adapted to prevent it being refilled. Under this construction when a bottle has been once opened, it cannot be again refilled and placed upon the market without bearing evidence of the fact that it has been so refilled and offered for sale a second time.

METHOD OF EXTRACTING GUTTA-PERCHA.—E. C. LARSEN, Singapore, Straits Settlements, India. The invention refers to a system or process of extracting gutta-percha contained in the raw state in leaves and buds of the isonondra tree and other varieties, vines, and creepers capable of yielding gum. This system treats the substances named in order to extract gutta-percha by a mechanical method without the use or without the extensive use of oil, salt, or other chemicals.

FIRE-ESCAPE.—R. LYTLE, Afton, Ohio. It is the principal object of this improvement to provide for efficiently and rapidly elevating a mast and to provide connections with the mast in such a manner that a cage can be readily elevated and let down, so that several persons can be quickly removed from the building and, furthermore, with hose quickly elevated into a position to fight a fire.

COMB-CLEANER.—A. B. HUGHES and A. ROSE, Cedarville, Cal. The cleaner is made up either in the form of a razor-strop or comb-case provided with a series of wires strung in a novel manner, which when the comb is intermeshed with them and drawn back and forth yieldingly press on the teeth at each side, thereby completely sawing out and dispelling accumulated dirt and dandruff.

DISK-RECORD HOLDER.—X. CUKIER, New York, N. Y. This invention pertains to a device the purpose of which is to hold a plurality of disk-records, such as used on phonographs, the object being to produce a device of this class which will hold the records together in a body and in such a way that any record may be readily selected and removed from the holder.

COLUMN.—E. W. CHAMBERS, Toledo, Ohio. The invention is an improvement in columns of that class provided with an inner core of wood coated with plaster or plastic material. The column will not be affected by the swelling and shrinking of the wooden core within it. Generally stated, the column consists of a series of wooden staves so arranged as to form an annular body, said staves being secured at their ends and spirally wound with a binding material, all of which is covered with a plaster or plastic coating. The staves of the column are interiorly supported at suitable points of their length and at each end where they are connected to an ornamental base and cap-piece of any desired contour.

GAS-GENERATOR.—C. L. GERRARD, Columbus, Neb. The present application is a division of a former application filed by Mr. Gerrard. The invention has reference to certain peculiar features of construction and arrangement of parts concerned with an apparatus for generating nitric oxid or other gas. It is especially for use in connection with the treatment of wheat or flour wherein the nitric oxid or other gas is mixed with air and the mixture brought into intimate association with many. The aim is to lighten the work of the nascent condition.

Machines and Mechanical Devices.

CIGARETTE-MACHINE.—J. M. MARTINEZ, Guanajay, Cuba. The underlying object of the present invention is to construct an organized cigarette-making machine by means of which the fibered tobacco may, in a continuous operation, be fed uniformly, molded into a stick or cigarette form, enveloped and sealed in paper or other wrapper, cut into the requisite lengths, and discharged finished from the machine.

GEAR-CUTTER.—J. VOSS, Woodburn, Ore. In operation the gear-wheel is secured in place upon a pin and the pin inserted in the chuck. The pin of a plate-spring is inserted in a perforation of the series corresponding in spacing to the distance desired between the teeth of the wheel. The cutter being put in rotation, it is moved longitudinally on the bed until it engages the wheel. Upon the retraction of the cutter the pin is disengaged from its perforation and inserted in the next of the series, after which the operation is repeated.

RAZOR-STROPPING MACHINE.—E. G. KAUFMAN, Yonkers, N. Y. The object of the inventor is to provide a new and improved razor-stropping machine which is simple and durable in construction, composed of comparatively few parts, and arranged to permit an easy movement of the strop to hold the cutting edge of the razor-blade in proper contact with the runs of the strop.

CANDY-MACHINE.—T. ALLATT, Portland, Ore. Time and labor are saved in the use of this machine, since long exposure of the candy is not necessary to cool it nor is it necessary to size the strips. Every portion of the candy is utilized, there being no waste. The strips are also of uniform size throughout, and since they are cut at regular intervals the completed product is in the most convenient form for wrapping by the automatic wrapping-machine.

Prime Movers and Their Accessories.

VALVE-OPERATING MECHANISM FOR STEAM-ENGINES.—H. LENTZ, Berlin, Germany. The aim is to lighten the work of the valve-motion of reversible engines, and to secure their management by employing a wheel instead of one or more connecting-rods. This wheel, being caused to rock by the driving mechanism, will move as directly as possible the cylinder valves by its rim. This invention also renders possible the reversing by hand, obviating the need of special reversing-engine. The rocking wheel moves directly all the inlet and outlet valves of the cylinder by means of its curved cams.

ENGINE-STARTER.—G. F. BRANDHUBER, Pierre, S. D. The invention relates to a device intended particularly for starting internal-combustion engines; and the object is to provide an easier and safer means for starting the engine than the ordinary starting-crank and to enable the starting-gear to be placed in reach of a person seated in an automobile, so as to avoid the necessity of the automobile-driver alighting each time the machine is started.

Railways and Their Accessories.

STATION-INDICATOR.—I. C. BANDMAN, New York, N. Y. Means are provided whereby when the gate or door is opened or closed a movement is given to certain parts of the device so as to change the sign displayed, also to provide for announcing the stations in regular order, forward or backward, according to direction or motion of train, and means for shifting the operating mechanism in such a way as to change the direction of motion of the sheet bearing the names of the stations.

STAKE AND STRAP APPLIANCE FOR FLAT-CARS.—A. S. BEVILLE, Jacksonville, Fla. One purpose of the inventor is to provide an attachment to flat-cars by means of which stakes will be locked to the car in such manner that they may be quickly fitted to their pockets or removed therefrom and whereby when removed and permitted to drop they will yet remain connected with the car, thus avoiding losing the stakes, which otherwise frequently happens.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 8506.—Wanted, machinery for the manufacture of alcohol from apples, molasses and sugar.

For logging engines. J. S. Mundy, Newark, N. J.

Inquiry No. 8507.—Wanted, a musical alarm clock, 7 feet high by 5 feet wide, nickel-plate brass frame with glass sides, visible works, retail price $2.48; wanted to purcease same by wholesale.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 8508.—Wanted, a machine for pointing meat skewers in large quantities, such as 50,000 skewers a day.

Pattern Letters. Knight & Son, Seneca Falls, N. Y.

Inquiry No. 8509.—Wanted, machinery for drilling vegetable ivory buttons.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 8510.—Wanted, makers of portable sanitary closets.

Metal Novelty Works Co., manufacturers of all kinds of light Metal Goods, Dies and Metal Stampings our Specialty. 43-47 S. Canal Street, Chicago.

Inquiry No. 8511.—Wanted, name and address of the makers of the Perplexity Puzzle recently sold by the Union News Co.

The celebrated "Hornsby-Akroyd" safety oil engine. Koerting gas engine and producer. Ice machines. Built by De La Vergne Mch. Co., Ft. E. 138th St. N. Y. C.

Inquiry No. 8512.—Wanted, name and address of wholesale dealers in galvanized corrugated iron and galvanized iron roofing.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machine work and special size washers. Quadriga Manufacturing Company, 18 South Canal St., Chicago.

Inquiry No. 8513.—Wanted, manufacturers of the following: trunk board, lamp colors, sheet aluminum, coal-oil burner without chimney.

Inquiry No. 8514.—Wanted, the address of a German firm which manufactures souvenir post cards and one which makes prism field glasses.

Inquiry No. 8515.—Wanted, the manufacturers of the Osmium Incandescent lamp.

Inquiry No. 8516.—Wanted, makers of small magnifying glasses, such as are found in watch charms

Inquiry No. 8517.—Wanted, makers of the following, for placer mining: sluice plates, reefs for same; tom hooks, tom plates, shovels for digging earth, criminals, cutlasses with iron handles, and battes.

Notes and Queries.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(10247) B. A. T. asks: 1. How many ampere hours will a Fuller battery give? A. About 68 ampere hours. 2. Does a Fuller battery give the same voltage after it has been charged some time as it does when it is freshly charged? A. No. 3. Does a porous cup that is used in batteries wear out? A. No. 4. Does battery carbon wear out? A. No.

(10248) 1. S. W. asks: 1. At what temperature does frost form? A. At 32 deg. Fahr. 2. In magnetizing a piece of iron or steel with a permanent magnet, does the permanent magnet lose any of its magnetism? A. No. On the contrary it tends to strengthen the magnet. 3. What horse power engine is required to run the 8-lamp dynamo of SUPPLEMENT No. 600? A. Three-fourths horse-power. Also what horse-power to run the 110-volt dynamo of SUPPLEMENT No. 865? A. About one horse-power. 4. How is the horse-power of a windmill calculated? A. Approximately by multiplying the area of the slats in the plane of revolution by the cube of the velocity of the wind in feet per second, and divide the product by 4,000,000.

(10249) E. H. H. writes: I wish to break an electrical circuit a certain number of times in a second by means of a spring and electro-magnet, something like the electric tuning fork, but only using one leg of the fork. What number of vibrations (double vibrations) is it possible to attain? C of the treble clef has 517.3 double vibrations in a second. Would it be possible to attain four octaves above that = 8,276.8 double vibrations; that is, break the circuit that number of times? A. With that number of breaks per second the current would be apparently continuous. A dynamo making 1,800 turns per minute makes 30 turns per second, and if there are 24 coils on the armature, there are only 720 impulses of the E. M. F. per second. We call such a current continuous, and it has not a tenth of the impulses you name.

THE PROGRESS OF THE HOLLOW CONCRETE BLOCK INDUSTRY.

Like all other new industries, the hollow concrete building block has had its vicissitudes, perhaps to a greater degree than almost any other.

The fact that it has gone nearly over the entire world in the short space of three years is proof that it has come to stay, and its increasing popularity is evidence of its undoubted merit. Every trade paper of note in this as well as foreign countries has devoted much space to discussions relative to the material, its adaptability to building construction, its sanitary qualities, cheapness, and durability, which, together with its superiority as a substitute for the rapidly-decreasing lumber, has attracted the attention of all classes of readers. That this has had a most beneficial effect no one can deny. The rapidity of its introduction compelled haste in securing a practical education which in turn was not slow to discern the qualities necessary to success in both blocks and the machine for their manufacture. Of all the two or three hundred patents which have been granted for machines and blocks, there is less than one dozen which have proved so successful as to require a factory to make the machine, while scores have come to light for a few weeks and then dropped from sight.

The readers of the Scientific American will remember in the issue of August 29, 1903, an article on this subject by a representative of this paper, sent especially to investigate this new building material and method used to make it practical. This was the first extended illustrated article on this subject in this or any country. The illustrations then given were photographs taken by our artist at a building being erected by the original inventor, Harmon S. Palmer, Washington, D. C. Previous to this time there were but few machine-made hollow concrete block houses in the world, and every one had been constructed under his system and personal supervision with one of his machines. The publicity given at that time had the effect of stimulating the general public to an unusual degree in this direction, with the result as above stated. But out of all devices which come to light, not one has departed from the original conception and fundamental principle, that of a machine with movable sides and cores and a removable bottom plate, on which the block is molded by tamping and on which it is carried away from the machine. Many have endeavored to substitute other means, and thousands of dollars have been spent by early inventors in trying to produce good blocks without tamping. Some have resorted to the slush system, others to filling the mold from an elevation, while others have lost fortunes in trying to perfect some sort of press, but failure has been the general result. Concrete will not flow like wet clay under a press, and it is impossible to deposit it in a mold so evenly that all places will be pressed alike, thus causing porous spots in the stone; and again, the confined air will expand on removal from the press, doing great harm to the block; then again the numerous shapes and sizes of blocks required renders complicated machinery utterly impractical.

However, various improvements have been added, which in practice have been found desirable in their manufacture. The greatest of these is flexibility in the machine, so as to make different sizes of blocks as well as different shapes and thicknesses. The machines of to-day are so admirably adapted to these changes that the most intricate designs of the architect are easily carried out with scarcely any effort of the machine operator. Many architects have taken up this branch of construction almost exclusively, and in connection with the machine manufacturer are surely developing a class of buildings that will be a pride to our country, inasmuch as they will require neither paint nor repairs, are dry and sanitary, durable, and cheap; and if the floors and roofs are properly constructed with the same material, fire insurance, that industrial cancer, will be entirely unnecessary unless the dwelling stands in the midst of many other inflammable buildings. This may seem a bold assertion, but it is not too strong, and the time will come when it will be considered a crime to erect a dwelling that can burn.

The accompanying illustration is one of the latest machines of the above type, just patented by the original inventor, called the "Multiple Automatic." Its points of excellence are its adaptability to innumerable changes. There is no design which an architect is likely to call for that this machine cannot make, and the co-operation is so perfect and so easily understood by the architect, that the machine is almost a necessary adjunct of his office and plans. Its flexibility is so great that one, two, three, or more blocks can be made at one time, of any shape, size, or thickness, with any number of air spaces in the block and in any location—which is impossible with complicated machines or presses. One movement of one lever opens and closes the machine, saving enough time to add one hundred per cent to the usual output. Owing to the interest which many of the devotees are taking in the development of this new industry, five or six of the largest and most progressive companies in this line have just been practically merged into one called the "United Cement Machinery Manufacturing Company," with Harmon S. Palmer, president of the Palmer Company, of Washington, D. C., as president; James F. Angell, president of the Winget Machine Company, of Columbus, Ohio, as first vice-president; James W. Sanderson, president of the Cement Machinery Manufacturing Company, of Burlington, Iowa, second vice-president; James M. McDowell, of Columbus, Ohio, as secretary; and Howard C. Black, general counsel. With the experience of these promoters and the number of factories and offices, together with the numerous patents which they control, this company should be a powerful factor in the hollow-block and cement industry of this country.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending November 27, 1906,

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Abrasive body and making the same, E. G. Case, reissue 12,567
Acetylene generator, G. W. Miller..... 836,695
Acid, manufacture of glycolic, O. Liebknecht 837,083
Advertising device, telephone, E. Gurney... 836,753
Aerial apparatus, J. Riley 836,709
Aerial cable support, C. L. Brown..... 837,185
Agitating and mixing apparatus, L. C. Trent 836,717
Agricultural implement, W. L. & W. A. Paul 836,779
Agricultural implement, S. P. Stovall..... 836,841
Air brake system, Henderson & Turner.... 836,682
Alloy, magnetic, R. A. Hadfield..836,756, 836,758
Alloy, pyrophoric, C. A. von Welsbach.... 837,017
Alloys, improving the magnetic qualities of iron silicon, R. A. Hadfield 836,754
Alloys, improving the magnetic qualities of iron silicon aluminium, R. A. Hadfield. 836,762
Alloys, improving the magnetic qualities of iron silicon manganese, R. A. Hadfield. 836,757
Amusement apparatus, C. L. Barnhart..... 836,799
Amusement device, H. N. Ridgway 836,708
Amusement device, D. J. B. Caffodio 837,189
Anchor, ground, W. J. Gallagher..... 836,678
Anesthetics, apparatus for administering, H. W. Wolfe 837,171
Animal cleaving machine, J. Zerfas..... 836,910
Automobile seat, W. H. Garnett 837,050
Automobile speed-indicating mechanism, drive gearing for, A. B. Cadman..... 837,188
Axle boxes, swing bearing for car, O. S. Pulliam 836,992
Axle, car, O. Williams 837,167
Bag fulling machine, B. F. Brown 836,665
Bag holder, C. M. Gerson 836,966
Bag holder, J. Thompson 837,148
Ball player's jacket, foot, A. Schemel.... 836,896
Band cutter and feeder, P. B. Jantz..... 836,766
Bearing, J. C. Cromwell 837,262
Bearing, ball, F. M. Foote 836,672
Bed, folding, J. L. Tandy 837,145
Bed, invalid's, A. M. Parkhill 836,889
Belt, link, S. B. Peck 836,943
Belt tightener, P. L. Bucy 836,918
Bicycle driving mechanism, J. S. Copeland. 836,738
Binder, loose leaf, J. C. Dawson...836,803, 836,804
Binder, loose leaf, G. Labarre 837,078
Blast furnace, J. Coyne 836,801
Block or tile press, L. N. McCarter 837,243
Block signal, electric, W. E. Sands..... 836,895
Boat and propelling gear for same, G. Nelson 836,821
Boiler stand, C. H. Foster 836,747
Book holder, note, W. B. Slife 837,002
Boots and shoes, making, P. Hebert..... 836,972
Boring machine, C. Hird 836,684
Bottle, M. L. Ambrose 836,852
Bottle, Vandergoot & Folen 837,159
Bottle capping machine, milk, U. S. Markland 837,237
Bottle capping machines, feeding mechanism for, W. Hoggard 837,065
Bottle closure, W. J. Frey 836,677
Bottle or receptacle, J. W. Maddox 837,089
Bottle stopper, O. S. Pugerud 836,782
Bowling alley, F. H. Bedell 837,177
Bowling alley, coin controlled, R. H. Hartley 836,763
Box filling machine, J. P. & C. F. Wright, 836,729, 836,730
Bracelet, belt, etc., automatically adjustable, J. J. Sommer 837,004
Brake, C. N. Frey 836,676
Bread cutter, Meyer & Dehullu 836,694
Bridge, movable, T. Rall, reissue 12,570
Briqueting process, R. Schorr 836,897
Brushes, manufacture of, W. A. Weir..... 837,015
Bucket, clam-shell, V. E. Lane 837,079
Buckle, J. F. Molloy 837,095
Building block, A. D. Whisler 837,163
Building construction, metal, J. F. Makowski 837,090
Burlap or similar fabrics, padding and ornamenting, P. Richter 837,122
Burner, B. F. Jackson 836,883
Butter, oils, fats, etc., apparatus for refining, W. F. Jensen 837,069
Button, cuff, E. E. Staninger 836,900
Button-making and like purposes, press for, J. G. Breitenstein..... 836,916
Buttoning device, metallic, E. I. Rains.... 837,250
Calk joint runner, F. E. Gerstenberger.... 837,052
Cameras, bellows support for, J. Goddard. 837,218
Can and box heading machine, B. J. Lindgren, reissue 12,569
Can body forming machine, G. H. Stewart 837,008
Can heading machine, J. Brenzinger 836,735
Can opener, M. J. Ferren 836,744
Candle socket, T. M. Mulkerins 837,240
Car brake, O. F. Smith 836,898
Car coupling, J. & J. O. Timms 837,155
Car coupling, automatic, J. Stephens..... 837,144
Car door operating device, R. V. Sage.... 836,830
Car door operating mechanism, drop bottom, B. H. Smith 837,137
Car partition, stock, J. H. Phillips, Jr.. 836,890
Car, railway, F. C. Sargent 836,834
Car, railway, S. Otis 836,942
Car step, J. F. Hyers 837,242
Car stop, mine, J. Hamilton 836,880
Car ventilating system, G. H. Layng 836,934
Car wheel guard, railway, E. A. Mason.. 836,935
Carbon black making machine, J. M. Sweeny 836,948
Carbureter, F. A. Heath 836,764
Carbureter, F. J. Wright 836,795
Carriage top iron, H. Smith 837,138
Cash register and coin handling device, W. H. Muzzy 836,818
Cement and process, anhydrous hydraulic, E. J. Winslow 837,169
Cement block, J. M. Woodiwiss 836,727
Chains, bit link for, R. E. Noble 837,246
Cheese box, W. S. Beasley 837,176
Chopper. See Cotton chopper.
Cigar tip cutter, J. L. Wentz 837,018
Circuit breaker, G. Wright 837,023
Circuit breaker, W. Merrill 837,092
Circuit breaker, automatic, A. E. Doman.. 837,201
Circuit closer, automatic, T. W. Benson... 837,178
Circuit controller, J. P. Pool 836,827
Clasp, J. A. Shay 836,838
Clasp, L. S. Alexovits 836,957
Clothes line, C. W. Boese 836,855
Clothes line reel support, F. J. Bushard.. 836,959
Clutch, C. Hird 836,685
Clutch, J. C. Dawson 836,739
Clutch mechanism, Sobey & Mohr..... 837,003
Coal moving apparatus, E. Phillips 837,113
Coffee pot, W. H. McLaren 836,699
Collar, H. Ohashi 837,248
Collar fastener, horse, Hillengass & Klugh. 837,062
Column, metal, A. W. Ford 836,673
Concrete blocks, finishing the faces of, Wight & Galassi 837,165
Concrete building construction, J. B. Hinchman 836,683
Concrete mold, Brookshier & Ball..... 836,798
Concrete structures, apparatus for building hollow, J. H. McCoy 837,101
Concrete wall mold, A. C. Burns 836,667
Condensers, making electric, H. P. Clausen 836,863
Converters, restraining ebullition in, A. Zenzes 836,909
Conveyer, F. N. Nelson 836,938
Conveyer, I. Peabody 837,111
Conveying apparatus, Gilman & Bennett.. 837,053
Cooking utensil, F. Millwee 836,983
Cooler, J. Willmann 836,951
Cotton chopper and scraper, J. E. Tucker.. 836,718
Cotton conveying and cleaning apparatus, W. E. Elam 837,205
Cotton picker brace, W. I. Daniel 836,802
Curb and gutter, combined, B. H. Sturman 836,903
Current motor, alternating, M. C. A. Latour 836,978
Current motor, alternating, E. Schweiger.. 836,998
Curtain fixture, W. Rincker 837,123
Cutter gage, rotary, C. L. Whitener 836,847
Damper, automatic, C. R. Worthington.... 836,955
Damper, time-controlled, C. F. Anderson... 836,853
Decoy duck, Oliver & Westcott 836,823
Dental mirror, W. H. Grant 836,967
Desk, L. D. Sibley 837,000
Desk, school, D. W. Winburn 837,020
Die block, E. L. Hurd 836,686
Dipper, D. H. Mosteller 836,817
Disks to be sharpened, apparatus for holding and rotating, G. Gerardy 837,215
Display rack, J. T. Fellows 837,046
Dividers, P. E. Kent 836,812
Dividing measured charges from a mass of material, machine for, Thomson & Pennington 836,787
Door and window securer, T. J. Younglove. 836,850
Door check and closer, combined, F. A. Waldron 837,162
Door, collapsible revolving, T. Van Kannel 836,843
Door hanger, L. Willour 836,952
Door hanger and track, combined, C. L. Bundy 836,860
Door opener, electric, E. W. Fyler 836,965
Door opening and closing device, W. Wigham 837,164
Dough dividing machine, Parsons & Pennington 836,777
Draft frame, G. W. Nye 836,822
Drawer pull, F. G. Marbach 836,692
Drawing board, Burbank & Manson..... 836,919
Drill bit, rock, J. B. Pace 836,824
Drilling tool, W. C. Whitcomb 836,845
Duplicating device, M. Klaczko 836,814
Dust and rubbish sucking machine, F. Melichar 837,091
Dye and making same, azo, K. Schirmacher 837,128
Dyeing leather, F. J. Oakes 837,105
Ear drum, F. E. Coulter 837,196
Easel, C. T. Springman 836,840
Electric alarm, E. S. Moorer 837,097
Electric controller, R. W. Brown..... 836,666
Electric lighting, attachment plug for, D. E. Bown 837,182
Electric lighting, fuse plug for, D. E. Bown 837,183
Electric machines, cooling dynamo, P. Bunet 837,033
Electric motor, M. E. Fuld 837,213
Electric regulation system, J. Bijur..... 837,231
Electric switch, W. J. Murray 837,241
Electric time switch, J. Gunning..... 836,808
Elevator. See Water elevator.
Elevator car safety device, C. H. Guess... 836,877
Elevator safety appliance, H. H. Wilson.. 837,168
Elevator safety device, R. D. Secoy 837,253
Emergency brake, G. Macloskie 836,982
Engine, F. J. A. Schnarrendorf 836,946
Envelop, H. E. Jackson 837,228
Eyeglass retainer, W. S. Anderson 836,796
Eyeglasses, G. A. Layton 837,081
Eyelet, J. P. Brooks 836,857
Fabric coating machine, R. Falter 836,743
Fabric to render it impervious, treating, W. Spaulding 837,005
Fastening device, F. H. Richards 836,706
Fence and fence post, C. Reichert 836,828
Fence post, J. J. Worley 836,954
Fence post, B. B. Perkins 836,990
Fence post, G. W. Mann 837,236
Fencing, apparatus for stretching wire, A. J. Chandler 837,259
Fencing tie, wire, O. D. Morse..... 836,816
Fencing tie, wire, W. H. Shierson 836,839
Fender, H. Ekrem 836,872
Fibrous substances, agglomerating, C. A. C. de Caudemberg 837,193
Fifth wheel, vehicle, J. H. Jessen 836,767
File, document, P. W. Ziegler 836,956
Fire alarm, also applicable to sprinklers, automatic, Fiddes & Watt..... 836,746
Fire bucket, J. W. Bowerbank 837,181
Fire escape, J. C. Dangerfield 836,868
Fire extinguisher, P. De Wolf 836,924
Fire hose nozzle supporting device, adjustable and collapsible, A. D. Cole..... 836,864
Firearm, T. C. Johnson 837,072
Firearm, W. W. Smith 837,139
Firearm, magazine, W. Sonnenberg 837,141
Firearm sight, F. A. Schanz 836,835
Firearms, trigger mechanism for automatic, J. T. S. Schouboe 836,713
Fish rod ferrule, C. A. Tredwell 837,157
Fishing float, G. E. Hall 837,057
Fishing reel, A. E. Latta 837,080
Fittings, cleaning device for, R. Butler.... 837,035
Fly trap for windows, doors, etc., S. A. Newman 837,245
Folding machine, S. G. Goss 836,751
Food and making the same, cattle, G. W. Hooven 836,765
Fruit, apparatus for removing the skin from, H. A. Beekhuis 836,913
Fruit, artificial, S. Miller 836,887
Furnace, Carr & McLimans 837,191
Furnace attachment, M. J. Ferren 836,745
Gage, W. L. Chase 837,195
Game, H. Guillaume 836,878
Game apparatus, W. H. Gilman 836,681
Garden rake, J. M. Smyth 837,140
Garment form, P. F. Quinn 836,893
Garment supporter, C. S. Nonnemacher.... 837,103
Gas, extraction of ammonia from, W. Feld. 837,045
Gas generating apparatus, T. A. Davis.... 836,963
Gas meters with provers, device for connecting, T. R. Reichelderfer..... 836,894
Gas pipes, trap for condensed matter in, F. E. Morgan 836,696
Gas producer, C. L. Armstrong 837,026
Gas producer, H. Riche 837,121
Gas producers, feeding mechanism for, L. C. Parker 836,888
Gas purifying apparatus, F. Pettit 836,826
Gasket, E. A. Wilcox 836,950
Gate, S. Anderson 837,025
Gate locking device, wire, P. E. Bolstad .. 836,800
Gearing, C. C. Riotte 837,125
Glass, apparatus for the manufacture of continuous sheets of, E. Fourcault, 837,212, 837,265
Glass articles, apparatus for making, J. J. Power 836,991
Glass, lifting clamp for plate, L. F. Dettenborn 836,740
Glass melting furnace, W. O. Amsler..... 836,731
Golf club, F. C. Blanchard..... 837,030
Governor, engine, G. E. Riblet 836,784
Grain distributer, H. B. Bozard 836,664
Grain drier, S. J. Vernsten 837,010
Grain separating machine, E. L. Deaver... 836,869
Grinder, G. A. Kimber 836,813
Gun barrels, hand protector for, W. S. Alves 836,851
Gun sight, Meigs & Hammar 836,815
Gun sight, R. W. Hennessy 837,223
Hair picking machine, C. H. Dickson..... 836,741
Hair pin, C. T. Minder 836,937
Halter tie, J. S. Tupper 837,158
Hammer, pneumatic, A. J. Patch 836,778
Hanger. See Door hanger.
Hanger and retainer device, E. B. Colvan.. 836,866
Harmonica, E. Kohler 837,076
Harrow, J. C. Little 836,980
Harrow, J. W. Willcutt 837,166
Harvester and thresher, combined, N. W. & A. C. Thompson 837,149
Hasp fastener, A. B. Hackman 836,968
Hat and cap, collapsible, W. H. Smith.... 836,899
Head and back rest, adjustable, W. H. Carr 836,961
Heat exchanging apparatus, Theryc & Maslin 837,146
Heating apparatus, steam, L. M. La Barr.. 837,770
Hinge setting tool, R. M. Connely..... 836,737
Hinge, spring, Van Wagoner & Pomeroy... 837,009
Hitching device, Hazlewood & Robinson... 836,971
Hoist, portable electric, W. N. Vance 836,789
Hoisting machine, J. Campbell 837,190

Wood-working Machinery



For ripping, cross-cutting, mitering, grooving, boring, scroll-sawing edge moulding, mortising; for working wood in any manner. Send for catalogue *A*.
The Seneca Falls M'f'g Co.,
695 Water St., Seneca Falls, N. Y.

Engine and Foot Lathes
MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE
SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

BRASS OR STEEL

THE CLIPPER CLIP
☞ Its triangular shape prevents entangling and gives three times the capacity of any other Clip for attaching papers together.
Best & Cheapest. All Stationers.
CLIPPER MFG. CO.,
401 West 124th St., New York, U.S.A.
For free samples and information write to us.

STEAM TURBINES.—THEIR CONSTRUCTION, Operation and Commercial Application. SCIENTIFIC AMERICAN SUPPLEMENTS **1306, 1307, 1308, 1422, 1400, 1447, 1370, 1372.** The articles have all been prepared by experts in steam engineering. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

Keystone Well Drills

for Artesian and Ordinary Wate Wells; Mineral Prospecting and Placer Testing for Dredgers; Deep Drilling for Oil and Gas; Contractor's Blast Hole Drilling, River and Harbor Exploration, etc. Our five catalogs are textbooks in these lines.
KEYSTONE WELL WORKS
Beaver Falls, Pa.

The Best Dry Battery for AUTOMOBILE SPARKING
IS THE
Becko Spark Cell
4 Cells $1.25
J. H. BUNNELL & CO.
Electrical Manufacturers 20 Park Place, NEW YORK

PAN-TOG
Something out of the common
FOR MEN
FOR CHRISTMAS
Every Mother's Son Should Have One in His Room

Pan-Tog is a dressing chair for men; with it the trousers are creased fresh every morning. Note the panels in the back—500 lb. pressure on the pants. Improved hanger on back for coat and vest. Shoes and slippers go out of sight under seat which is low, and easy when lacing shoes. Quartered golden oak or mahoganized birch. A handsome chair that will last a life-time and pay for itself in six months. We pay freight. Write for descriptive folder. Price **$12.50**

CENTRAL MANTEL CO., 1212 Olive Str. St. Louis.

A Desirable Xmas Gift.
DRAPER'S
Recording Thermometer

Traces automatically a correct and continuous record in ink of the temperature on a graduated weekly chart. Made in two sizes, and standardized and fully guaranteed. Also other recording weather instruments.
THE DRAPER MFG. CO.
152 Front St., New York

GARDNER H. P. GASOLINE ENGINES

Simplest, safest, lightest running, most compact and durable engine built. Always ready to run; never out of order. The ideal engine for driving motor boats, dynamos, lathes, water and air pumps, and for every practical purpose where light motive power is required.
Engine complete as shown herewith sent C. O. D. anywhere in the world for **$50.** Or complete set of rough castings and detailed blue print with instructions how to build the engine yourself for **$12.** Write to-day for descriptive pamphlet and full information.
JOHN W. GARDNER
1037 Goodfellow Avenue, St. Louis, Mo.



FOR GUNSMITHS, TOOL MAKERS, EXPERIMENTAL & REPAIR WORK, ETC.
From 9-in. to 13-in. swing. Arranged for Steam or Foot Power, Velocipede or Stand-up Treadle.
Send for Lathe Catalog.
W. F. & JNO. BARNES CO.
Established 1872.
1999 Ruby St., ROCKFORD, ILL.

Asbestos and Magnesia Products
STEAM PIPE AND BOILER COVERINGS.
ASBESTOS PACKING (For all purposes).
ASBESTOS FIRE-RESISTING CEMENTS.
ASBESTOS BUILDING MATERIALS.
"J-M" ASBESTOS ROOFING.
ASBESTOS FABRICS.
KEYSTONE HAIR INSULATOR
ELECTRICAL SUPPLIES.
H. W. JOHNS-MANVILLE CO.
New York, Milwaukee, Chicago, Boston, Philadelphia, St. Louis, Pittsburg, Cleveland, New Orleans, Kansas City, Minneapolis, Dallas, San Francisco, Los Angeles, Seattle, London.

Kerosene Oil Engines
Marine, Stationary, Portable

NO DANGER, Maximum Power, Lightest Weight, Simple, Reliable, Economical. No Batteries, Self Ignition by Compression. Fully guaranteed. Write for Catalogue S. A. ☞ No charge for packing.
INTERNATIONAL OIL ENGINE CO.
38 Murray St., New York, U. S. A.

THE OBER LATHES

For Turning Axe, Adze, Pick Sledge, Hatchet, Hammer, Auger, File, Knife and Chisel Handles, Whiffletrees, Yokes, Spokes, Porch Spindles, Stair Balusters Table and Chair Legs and other irregular work.
☞ *Send for Circular A.*
The Ober Mfg. Co., 10 Bell St., Chagrin Falls, O., U.S.A.

AMERICAN HOMES AND GARDENS
Bound Volumes

IN response to many requests we have caused a beautiful design to be prepared and expensive registered dies cut so as to produce a most artistic cover. The handsome green cloth is most substantial and the book is sewn by hand to give the necessary strength for so heavy a volume. The decoration of the cover is unique. There are five colors of imported composition leaf and inks, artistically blended. The top edge of the book is gilded. The volume contains all of the 1906 numbers. The price prepaid to any address in the United States or Canada is **$5.00.** Those who desire to have their own copies bound may purchase cases which are identical with those of the bound volumes. Any bookbinder can sew and case-in the book for a moderate price. We send this case securely packed for $1.50.
MUNN & COMPANY, Publishers
Scientific American Offices
361 Broadway, New York

SPARK COILS
Their Construction Simply Explained

Scientific American Supplement 160 describes the making of a 1½-inch spark coil and condenser.
Scientific American Supplement 1514 tells you how to make a coil for gas-engine ignition.
Scientific American Supplement 1522 explains fully the construction of a jump-spark coil and condenser for gas-engine ignition.
Scientific American Supplement 1124 describes the construction of a 6-inch spark coil.
Scientific American Supplement 1087 gives a full account of the making of an alternating current coil giving a 5-inch spark.
Scientific American Supplement 1527 describes a 4-inch spark coil and condenser.
Scientific American Supplement 1402 gives data for the construction of coils of a definite length of spark.
The above-mentioned set of seven papers will be supplied for 70 cents.
Any single copy will be mailed for 10 cts.
MUNN & COMPANY, Publishers
361 Broadway New York



WE SAVE YOU 35% TO 60% ON TYPEWRITERS
All Standard Makes
Guaranteed equal to new in appearance and quality of work. Thoroughly rebuilt. Why pay $100 for a **TYPEWRITER** we sell for $40 to $65? Discount on orders five or more.
McLaughlin Typewriter Exchange, 618 Olive St., St. Louis, Mo.
Second-hand typewriters $15 to $25. Agents wanted. Send for particulars.

A MONEY MAKER
Hollow Concrete Building Blocks Best, Fastest, Simplest, Cheapest Machine. Fully guaranteed.
THE PETTYJOHN CO.
615 N. 6th Street, Terre Haute, Ind.

SPRINGFIELD ABRASIVE POLISHING WHEELS AND BLOCKS.
Used for polishing machinery, cutlery and edge tools of all kinds and for removing rust spots from highly polished metal. Makes a very smooth surface without marring. Containing rubber which gives it the resilient effect. Made with either Emery or Carborundum in different grades. Write for price list and special trade discounts.
The Springfield Tire and Rubber Co.,
SPRINGFIELD, OHIO, U. S. A.

A Home-Made 100-Mile Wireless Telegraph Set
Read SCIENTIFIC AMERICAN SUPPLEMENT 1605 for a thorough, clear description, by A. Frederick Collins, of the construction of a 100-mile wireless telegraph outfit. Numerous, adequate diagrams accompany the text. Price 10 cents by mail. Order from your newsdealer, or from
MUNN & CO., 361 Broadway, New York

Holster, J. W. Townsend	837,156
Hopper or bin, U. A. Garred	836,679
Horseshoe attachment, Fink & Andlauer	836,807
Horseshoe tool, M. S. Reigh	837,117
Hose coupling, Klug & Honnauer	836,930
Hydraulic motor, J. H. Rose	837,252
Ice creeper, C. L. Edwards	836,964
Ice cutting tool, F. D. Woodford	837,172
Inking mechanism for cylinder presses, R. Miehle	837,093
Insect destroyer, T. A. Sissom	837,136
Intercommunication, automatic system of, A. Van Wagenen	836,904
Invalid's rest, J. D. Wilson	836,726
Ironing machine, W. E. Andree	836,797
Ironing machine, W. M. Barnes	837,257
Jewelry catch, safety, J. W. Hansen	836,969
Joists, etc., device for leveling, A. P. Jamison	837,067
Journal box lid, car, Williams & Harrison	836,793
Keyhole guard, time operated, R. W. Gatewood	837,051
Knife, I. Kinney	837,075
Knitting machine stop device, circular, E. H. Ludwig	836,691
Knuckle joint, W. Crutchlow	837,200
Label placing machine, W. C. Stevens	836,902
Lacing construction, corset, S. S. Gossard	837,056
Ladder, fire, I. S. Shumaker	836,785
Lamp, arc, F. S. Murray	836,774
Lamp burner attachment, J. H. Ferguson	837,211
Lamp socket, incandescent, W. W. Jones	837,073
Lamp sockets, construction of incandescent electric, G. W. Goodridge	837,054, 837,055
Lamp, vapor burning, W. Mitchell	837,238
Lamps, apparatus for illuminating photographic studios with electric incandescent, P. G. von der Lippe	837,084
Lantern, W. S. Hamm	836,809
Lathe shaft straightener, L. O. Goodwin	837,267
Leaf turner, Pedretti & Reuss	836,703
Leather heating and stuffing apparatus, combined, P. H. Grimm	836,876
Leather or leather waste, detanning mineral or chrome tanned, A. R. Weiss, Jr.	837,016
Level, C. A. Harding	837,059
Line fastener, D. W. Nuttall	837,247
Linotype machine, J. R. Rogers	837,126
Linotype machine, T. S. Homans	837,226
Linotype machines, matrix for, J. R. Rogers	837,127
Lithium salts, obtaining, C. Poulenc	836,781
Lithographic machine, rotary, H. Bittner	837,029
Load brake, automatic, M. A. Beck	836,912
Loading apparatus, D. M. Hartsough	836,970
Lock, J. J. Murphy	837,100
Lock and latch mechanism, H. G. Voight	837,011
Loom heddle frame, W. Fehr	837,264
Loom, kindergarten, J. C. Tyndall	836,842
Loom shuttle motion, C. C. Crane	837,198
Loom shuttle, weft detecting, J. G. Gabe	837,214
Loom stop motion, H. W. Owen	837,110
Looms, needle motion for pile fabric, F. A. Whitmore	837,019
Lubricator, Grayber & Kerrigan	837,220
Magnet, lifting, C. E. F. Ahlm	837,174
Magnetic materials, making, R. A. Hadfield	836,759 to 836,761
Magnetic qualities of a magnetic body, improving certain, R. A. Hadfield	836,755
Malting apparatus, J. W. Free	836,925
Mangle, gas, H. F. Pendleton	836,780
Manhole plate or cover, Brown & Harter	836,859
Manicure and chiropodist's apparatus, R. H. Johnson	837,229
Manuscript holder, W. B. Slife	837,001
Mat. See Pedal mat.	
Match box, W. T. Ives	836,927
Match card, M. Larsen	837,233
Measuring and registering device, J. H. Burland	837,034
Measuring and trying device, H. R. Procter	836,891
Measuring appliance, liquid, J. H. Optenberg	836,941
Medicine case, J. L. Holcomb	837,224
Menthol compound, R. Berendes	836,914
Metallic construction, A. J. Malmberg	836,885
Metals and alloys from oxids, etc., production of fused, C. Vautin	837,160

It's Summer Now in
JAMAICA

GO BY THE

Palatial Twin-Screw Steamship

"Prinzessin Victoria Luise"

or by the superb

New "PRINZ" Steamers

FIRST-CLASS RATES

$35 One Way $60 Round Trip

and upward, including Stateroom and Meals

JAMAICA offers a most delightful climate, excellent hotels, unsurpassed roads for automobiling; (4000 miles of macadamized highways) also golf, shooting, bathing, etc.

THE PRINZESSIN VICTORIA LUISE is one of the finest twin-screw passenger vessels afloat: carries first-class passengers only; staterooms equipped with lower berths only; has a gymnasium with latest Zander apparatus; splendid ship's band; in fact, service, cuisine and entire equipment equal to the finest transatlantic liners.

For further particulars, booklet, rates, etc., apply

Hamburg-American Line

35-37 Broadway, New York

1229 Walnut Street, Philadelphia, Pa.
159 Randolph Street, Chicago, Ill.
90 State Street, Boston, Mass.
908 Market Street, San Francisco, Cal.
901 Olive Street, St. Louis, Mo.

AGENCIES IN ALL LARGE CITIES

Meter, F. Holden	836,974, 837,066
Meter register, L. H. Nash	836,820
Milk pasteurizer, C. Elofson	836,873
Milk pasteurizing apparatus, C. A. Janson	837,068
Mining drill, F. A. English	837,208
Motor control apparatus, F. E. Case	837,037
Motor control system, G. H. Hill	836,973
Mowing machine, P. Hanson	837,058
Mowing machine attachment, J. P. Johnson	837,071
Nail coating machine, C. Waggoner	837,161
Necktie fastener, T. Seiler	836,837
Necktie holder, R. T. Leclerc	836,979
Nozzle, spraying, C. A. Koepnick	836,931
Numbering machine, P. R. Dill	836,742
Nut lock, F. H. Fellows	837,209
Oil press, F. Oliver	836,701
Oiler, Anderson & Winton	837,624
Operator's key, A. Carliss	836,668
Ore concentrator, W. Lerchen	837,082
Ore roasting furnace, mechanically rabbled, T. Edwards	836,871
Overseaming machine, Onderdonk & Woodward	837,106
Packaging machine, Lazaga & Lev	836,690
Pad or bustle, F. M. Whitney	836,790
Panel construction, P. M. Wege	837,014
Paper hanger, wall, C. O. Shirk	836,716
Paper tray, F. B. Davidson	836,923
Pedal mat, G. Winters	837,021
Pedal, self locking, G. F. Discher	837,043
Pen cap and barrel, fountain, J. N. Whitehouse	836,905
Pen, self-filling fountain, J. N. Whitehouse	836,906
Pen stamping machine, J. Gabrielsson	837,049
Penholder, M. L. Little	837,234
Pencil sharpener, D. D. Rush	836,712
Petroleum, apparatus for the rectification of, E. A. Barbet	836,732
Phonograph, C. W. Noyes	836,940
Phonograph records, duplicating, V. M. Harris	837,061
Photographic printing frames, shutter for, J. Kaut	836,928
Photographic vignetter, G. F. Fraley	837,048
Piano case lid support, C. Kohler	836,689
Piano, violin, J. L. Warner	836,844
Pick point, removable, C. Bourque	836,856
Pickling cradle, W. H. Richards	837,120
Pie machine, Colborne & Deuerling	837,042
Piling, interlocking metal sheet, G. E. Nye	836,987
Piling, metal sheet, J. R. Williams	836,725, 836,792
Piling, metal sheet, R. V. Sage	836,832
Piling, metallic sheet, R. V. Sage	836,833
Pipe joint, balanced compensating, G. A. Oliver	836,989
Pipe wrench, D. D. Barnum	836,733
Planing machine, metal, C. O. Harley	837,060
Planter, corn, J. O. Brown, Sr.	836,917
Planter coverer, Stapp & Robertson	836,901
Plate or negative squaring machine, J. L. Perkins	837,112
Pliers, jeweler's, E. C. Chamberlin	836,861
Plow, F. A. Bressmer	837,258
Plow, disk, J. Moore	836,773
Plow shovel, J. J. McManmon	836,986
Plow, steam gang, A. G. Kern	837,074
Plug, attachment, D. E. Bown	837,184
Plumbers, etc., testing device for, N. B. Feather	836,874
Pneumatic cushions for vehicles, A. M. Lockett	837,086
Pneumatic wheel, G. H. Treadgold	836,716
Pocket book protector, C. T. Marshall	836,693
Pole holes, means for closing sliding, J. Stevenson	837,007
Post. See Fence post.	
Powder, producing explosive, Du Pont & Sparre	836,704
Power transmission connection, R. J. Hoffman	836,882
Press, F. Oliver	836,776
Pressing machine, W. Pool	837,116
Printing cylinders, forming, J. W. McIndoe	837,102
Printing machine, W. Scott	837,130
Printing machine, web, L. C. Crowell	836,669
Printing press, S. G. Goss	836,749
Printing press, multiroll web perfecting, S. G. Goss	836,750

SORE THROAT

To prove the Efficiency of

Hydrozone

to Sore Throat Sufferers, I will send **One 25 Cent Bottle Free** to everyone sending me this advertisement with 10 cents to pay postage and packing. Hydrozone is a harmless germicide, indorsed and successfully used by leading physicians. Not genuine without my signature on label. Ask for Booklet on Treatment of Diseases. Sold by Leading Druggists. Good until Feb. 10, 1907.

Prof. Charles Marchand

Dept. U, 63 Prince Street, New York

FREE!

Every Manufacturer Needs This Book

It provides easy means for solving questions arising out of the increased use of friction gearing.

This company makes more and better

PAPER & IRON FRICTIONS AND PAPER PULLEYS

than any other concern. They improve power transmission, and are very durable.

The book contains valuable tables, facts, and formulas to be found nowhere else. We send it free to those who have need for it. State occupation and firm connected with.

The Rockwood Mfg. Co.

1904 English Ave.
Indianapolis, Ind., U. S. A.

$3.00 A YEAR

PUBLISHERS' NOTICE

American Homes and Gardens

PUBLISHERS' NOTICE

$3.00 A YEAR

$3.00 a year; or, with the SCIENTIFIC AMERICAN, $5.00 a year.
Measures 10½ x 14 inches. 72 Pages. Colored Cover.

¶ This is a thoroughly practical magazine, dealing with the home and its surroundings. An ideal journal dealing not only with buildings but with country life as well. The aim of the magazine has been to stimulate among its readers a wider interest in the beautifying of the home. The articles deal with not only the house exterior but the interior plans and arrangements and the subject of decoration as well. The garden, as an adjunct or frame of the mansion, receives its full share of attention, and each issue contains examples of artistically planned gardens, large and small, old and new. There will be published in each issue some large estate, and the reader will be taken over the buildings and grounds as a visitor. There will also be published articles dealing with all phases of practical country life.

DURING 1907 ARTICLES WILL BE PUBLISHED ON THESE SUBJECTS:

The Home Roof—A Neglected Opportunity;
How a Woman Made a Worn-out Farm Pay;
The Iris Garden;
The Kitchens of Our Forefathers;
Cement and Concrete in the Formal Garden;
Flowers for House and Table Decoration.



A Sheraton Sideboard in a New England Home

A MINIATURE ENGRAVING

DURING 1907 ARTICLES WILL BE PUBLISHED ON THESE SUBJECTS:

Well designed Appliqué for the Home;
A Naturalistic Garden designed by its owner;
Something Concerning Driveways;
Life on an Olive Ranch;
Longfellow's Home;
Curtains and Draperies.

¶ The magazine is beautifully printed on heavy coated paper, and is elaborately illustrated by handsome engravings made from photographs taken especially for this publication. The colored covers change monthly (see reduced black and white specimens above). AMERICAN HOMES AND GARDENS should have been a place in every home. Send $3.00 to-day and receive the beautiful November and December issues without charge. Three sample copies, 25c.

MUNN & COMPANY, Publishers, Scientific American Office, 361 Broadway, New York

MANY A RESPECTABLE GAS ENGINE

has lost its reputation because of incompetent batteries. **Edison** Primary Batteries will make any gas or gasoline engine keep its promise. They deliver a steady, continuous current, use up no energy when not in use, have long life, are easy to set up, simple to renew and cheaper in the long run than any other form of battery energy.

Write for literature telling all about **Edison** Batteries and showing just what you need for your purpose.

EDISON
Manufacturing Company
25 Lakeside Ave., Orange, N. J.
31 Union Square, New York
304 Wabash Ave., Chicago
25 Clerkenwell Road, London, E.C.

HIGH GRADE PURE SEAMLESS Alpha

INNER TUBES

will largely

Obviate Tire Troubles

STRONGEST TUBES
Imported or Domestic
PARKER, STEARNS & CO.
228 and 229 South St., New York, U. S. A.

The Oliver Writes Right Because It's Built Right

THE OLIVER TYPEWRITER is a perfect piece of mechanism.

It is scientific in principle, flawless in construction, splendidly efficient in operation.

We build the Oliver to accomplish *results* in the quickest, simplest, easiest way.

It is a *visible* writer. The type strikes the paper in plain sight. No lifting of carriage. Space indicator shows the printing point.



It is a *perfect aligner*. The type bars are U-shaped—with type in exact center.

It is a marvel of *simplicity*. Has less than one-third the number of parts of other standard machines. This saves time, temper and repair bills.

It has the universal keyboard—*simplified*. Prints 84 characters with 28 keys.

It has an Automatic Paper Register—a continuous feed, like a printing press.

The carriage is instantly removable—extra long carriage for way-billing, insurance policies, etc., can be used interchangeably with regular carriage.

The direct downward stroke of keys makes it easy to manifold from one to twenty copies simultaneously.

Each part of the Oliver is made from an individual piece of tool steel. The escapement pinion of other machines is composed of from five to eighteen pieces. The Oliver escapement pinion is one *complete part*, made *from a solid piece of tool steel*.

Not a single piece of wood or tin is used in the entire machine. In *durability*, in *speed capacity*, in *versatility* and *perfect printing qualities*, the Oliver Typewriter has no competitor.

As one of the most eminent engineers in the country expressed it, the Oliver Typewriter is "a Symphony in Steel."

It is 100% perfect.

Write for the Oliver Book, which tells more about this wonderful writing machine.

The Oliver Typewriter Company
119 Wabash Ave., Chicago, Ill.

To Book Buyers

We have just issued a new 112-page catalogue of recently published Scientific and Mechanical Books, which we will mail free to any address on application.

MUNN & COMPANY
Publishers of SCIENTIFIC AMERICAN
361 Broadway, New York

Printing slug, line, J. R. Rogers	836,710
Pulley, expansible, G. S. Cox	837,261
Pulleys, adjusting mechanism for expansible, Reed & Parsons	836,783
Pump, massage, H. P. Engeln	837,207
Pump piston, T. H. Gallagher	837,266
Pumping system, W. M. Myers	836,775
Punching machine, F. G. Oldenburg	836,700
Rail brace, adjustable, F. C. Anderson	837,175
Rail brake, W. C. Shulz	836,997
Rail, guard, T. Carmichael	837,036
Rail joint, B. Wolhaupter	836,953
Rail joint, I. Johnson	837,070
Rail joint, C. E. Schreffler	837,129
Rail joint, H. D. Shuster	837,134
Rail joint, L. S. Gordon	837,268
Rail splice, J. K. Bergstrom	837,179
Rail structure, guard, E. S. Hippey	836,881
Rails, means for preventing creeping of, C. H. Caspar	837,192
Railway safety apparatus, G. T. & L. Woods	837,022
Railway signal, J. C. Naginey	837,244
Railway signaling system, L. H. Thullen	837,154
Railway signaling system, J. G. Horazdovsky	837,227
Railway trains, hose coupling for, A. F. Morton	837,098
Range base, J. J. Geis	836,680
Reed, wire, willow, or similar plotting or lattice work, P. Loscher	836,884
Reflector, McCoy & Kutscher	836,819
Refrigerator attachment for milk cans, Croy & Rhea	836,867
Return ball, C. M. Thomas	837,147
Revolving case, O. Shidler	836,947
Riffle apparatus, J. M. Couper	837,197
Rifle sight, H. L. Bock	837,180
Rock drill, W. C. Whitcomb	836,846
Rock drill, J. J. Rekar	837,118
Rolling mill, sheet metal, E. Norton	837,104
Rolling mill work reversing mechanism, V. Chartener	837,039
Roof flange, J. C. Lauth	836,933
Rope clamp, M. Spearbeck	837,142
Rotary engine, E. G. Kesling	836,768
Rotary engine, W. H. Downing	837,202
Salt and pepper shaker, G. H. Hodgson	837,064
Salt shaker, J. M. Gallisath	836,748
Sash closing device, E. L. Charroin	837,194
Sash fastener, N. Johnson	836,976
Saw, J. Oldham	836,988
Sawmill dog, G. S. Sergeant	837,132
Scaffold, portable, Spaull & Hall	837,006
Scale, weighing, H. Fairbanks	837,263
Seed tester, Rahr & Bauer	836,993
Seining apparatus, A. Yancey	837,173
Separator, G. W. Christoph	836,922
Sewing machine, E. C. Ives	837,269
Sewing machine take up mechanism, R. G. Woodward	836,849
Sewing machines, needle and pull off shifting mechanism for, R. G. Woodward	837,255
Shade roller attachment, Reynolds & McCarthy	837,119
Shaft attachment, vehicle, O. G. Cranston	837,199
Ship's progress indicator, Whittle & Cumming	836,724
Shot making machine, P. F. Cowing, reissue	12,568
Sign, W. J. Bailey	837,027, 837,028
Sign, illuminated, W. T. Bradshaw et al.	836,915
Signal system, air brake, T. J. Quirk	836,705
Silk and artificial hair from casein, production of artificial, F. Todtenhaupt	836,788
Silversmith's stock, M. T. Goldsmith	837,219
Skinning knife or implement, O. Dunkel	837,203
Sled, J. O. Jorgenson	837,230
Soldering iron, gas, H. Berg	836,663
Sound sensitizer, M. Frank	836,674
Speeder, E. Richter	836,707
Spindle bands, dynamometer for, H. P. Greg	836,752
Splice bar, Sage & Thackray	836,831
Spoke tenon and felly clip, J. Wilcox	836,791
Spring motor, J. Bornand	836,734
Spring wheel, J. H. Kennebrew	836,811
Stanchion, cattle, J. R. Duff	836,671
Stanchion, cattle, J. R. Dunn	836,806
Stand. See Boiler stand.	
Steam generator, W. A. Pitt	837,114
Sterilizer, H. A. Miller	837,094
Stitch indenting machine, F. Chateauneuf	836,862
Stop motion mechanism, H. Sirois	837,135
Stove attachment, C. A. Notman	836,939
Strainer, milk, R. A. Kreiner	837,232
Sweaters, neck and front piece for, H. Starr	837,143
Switch bar, H. B. Cowley	836,962
Switch operating device, F. R. Turecek	836,719
Switches, interlock for electric, O. O. Rider	836,994
Syringe, vaginal, G. C. Loar	837,085
Table, S. Hall	837,221
Telegraph station, temporary, C. S. Maynard	836,936
Telephone apparatus, D. H. Wilson	836,848
Telephone apparatus, H. J. Roberts	837,251
Telephone or switchboard plug, A. B. Dozier	836,805
Telephone toll apparatus, E. P. Baird	837,256
Telescope, E. Lohmann	836,771
Temperature controlling apparatus, E. W. Comfort	837,260
Testing device, A. L. R. Ellis	837,044
Threadless bolt and nut, J. J. Souder	836,786
Threshing machine beater, W. F. MacGregor	837,088
Threshing machine sieves, attachment to, E. J. Pellowski	836,825
Tie plate, W. R. A. Ball	836,854
Tie plate, E. J. Burr	837,187
Tire and rim, vehicle, F. R. Keith	836,929
Tires, manufacturing pneumatic, A. H. Marks	836,772
Tobacco into paper tubes, machine for filling, H. Kurkiewicz	836,769
Tongue support, M. L. Johnson	836,975
Tongue support, vehicle, C. H. Chapman	837,038
Tool, combination, S. Rothschild	836,711
Top, spinning, V. L. Bekefi	836,958
Tower, transmission, D. R. Scholes	836,836
Toy, W. V. Gilbert	837,216
Toy, figure, W. V. Gilbert	837,217
Toy, locomotive, D. P. Clark	837,040
Trace carrier, H. H. Wachter	837,013
Track sanding apparatus, N. B. Dodge	836,870
Train control system, C. E. Lord	836,981
Tramway, aerial, G. G. Schroeder	836,995
Transom or sash holder, C. Schuette	836,996
Trip and conveyer, receiving, G. W. Loggie	837,087
Trolley for overhead tracks, L. Coburn	836,736
Truck, Chase & Stocklin	836,921
Truck side frame, railway car, G. G. Floyd	837,047
Tug, hame, W. J. Campbell	836,920
Turbine motor, internal combustion, C. C. Poole	836,945
Type justifying mechanism, F. McClintock	836,697
Type setting and justifying machine, F. A. Jonnson	836,687
Typesetting machine, F. McClintock	836,698
Typewriter, L. Sholes	836,999
Typewriters, printing point indicator for, G. Persson	836,944
Typewriting machine, A. T. Brown	836,858
Typewriting machine, E. F. Kunath	836,932
Typewriting machine, A. T. Brown	837,031, 837,032
Typewriting machine, G. A. Seib	837,131
Valve, Hite & Robertson	837,063
Valve and valve disk cutting machine, F. L. Smith	836,715
Valve, closet flush, H. Kupsch	837,077
Valve for air brake systems, regulator, W. V. Turner	836,720
Valve mechanism for compound engines, E. J. Armstrong	836,911
Valve, quick recharging triple, W. B. Mann	836,886
Valve, thermostatic, E. H. Murphy	837,099
Valves and other mechanisms, automatic device for operating, Winter & Waterman	836,794
Vehicle draft attachment, L. Voight	837,012
Vehicle, traction, F. H. Gilbert	836,875
Vending device, J. D. Frazey	836,675
Vending device, W. C. Johnson	836,688
Vending machine, N. C. Wallenthin	836,721, 836,722
Vending machines, elevating and delivering mechanism for, W. Mooney	837,239
Vessel construction, O. S. Pulliam	836,892
Voting machine, J. W. Clark	837,041
Wagon, dump, T. R. Ringwood	837,124
Wagon, dumping, W. E. Currie	836,670



Wooden Tanks

Any Size or Shape

Steel Towers

Any Height

The Baltimore Cooperage Co.
MANUFACTURERS
BALTIMORE CITY, MD.
CATALOGUE GRATIS

"The 20th Century Limited"

Fastest Long Distance Train in the World,
Via the

NEW YORK CENTRAL LINES

"America's Greatest Railroad"

This magnificent train is equipped with Pullman cars of the very latest design and has all the special features which have made the New York Central service so deservedly popular. Barber, Baths (Fresh and with Sea Salt), Valet, Ladies' Maid, Manicure, Stock and Market Reports, Telephone, Stenographer, etc.

A dozen other fast trains between

New York, Boston,
and
Buffalo, Detroit, Cleveland, Columbus,
Cincinnati, Indianapolis,
Chicago, St. Louis,
the West and
Southwest

C. F. DALY
Passenger Traffic Manager
NEW YORK

For Early Publication

Industrial Alcohol

Its Manufacture and Uses

A Practical Treatise

BASED ON

DR. MAX MAERCKER'S
"INTRODUCTION TO DISTILLATION"
AS REVISED BY
DRS. DELBRÜCK AND LANGE

COMPRISING

Raw Materials, Malting, Mashing and Yeast Preparation, Fermentation, Distillation, Rectification and Purification of Alcohol, Alcoholometry, The Value and Significance of a Tax-Free Alcohol, Methods of Denaturing, Its Utilization for Light, Heat and Power Production, A Statistical Review, and The United States Law

BY

JOHN K. BRACHVOGEL, M. E.

450 Pages. 105 Engravings.
Price, $3.00.

The latest and most authoritative book on the subject based on the researches of eminent German specialists. Denatured alcohol is one of the most promising of the coming industries and its literature is extremely limited.

MUNN & COMPANY, Publishers
361 Broadway, New York

Factory Clerks and Superintendents

We can help you to increase your earning power from 25 to 50% by means of our Course of Instruction in COST ACCOUNTING. We can teach you not only to devise and instal a system for the place you now fill, but to build factory systems for others. In fact we can teach you to become a COST EXPERT. Hundreds of our students are to-day filling the best positions. Do you want to be helped as we have helped them? Let us show you how we do it. It costs nothing to investigate. The cost is small and we give you all the time you want in which to pay it. A few of your spare half hours for the next few months will put you in a position to demand far more salary or to produce far better results. There is no way to advance except through knowledge. Let us teach you. Drop us a postal card and ask for our plan for teaching you how to become an

Expert Cost Accountant

The International Accountants' Society, Inc.
59 FORT STREET, DETROIT, MICHIGAN

ROTARY PUMPS AND ENGINES. **Their Origin and Development.—An important series of papers giving a historical resume of the rotary pump and engine from 1588 and illustrated with clear drawings showing the construction of various forms of pumps and engines. 38 illustrations. Contained in SUPPLEMENTS 1109, 1110, 1111. Price 10 cents each.** For sale by Munn & Co. and all newsdealers.

You Can Whitewash Cheaper and Better

One man can apply whitewash or cold water paint to

10,000 Square Feet of Surface in One Day

and do better work than with a brush. It is also adapted for **spreading disinfectants, destroying insect pests and diseases on trees, vegetables and other plants, extinguishing fires, washing windows, wagons,** etc., and other purposes. The machine is really a little water works system on wheels because the easy movement of the pump develops a pressure exceeding 80 pounds and will raise the liquid more than 80 feet above its own level. The Progress, 12 gallon size, costs only $21.00; the 20 gallon size $30.00. It will last a lifetime and pays for itself the first year. Other types of machines sold as low as $9.00 and $10.00. Write for detailed description.

Dayton Supply Co., Dept. R, Dayton, O.

Concrete, Reinforced Concrete AND Concrete Building Blocks

Scientific American Supplement 1543 contains an article on Concrete, by Brysson Cunningham. The article clearly describes the proper composition and mixture of concrete and gives results of elaborate tests.

Scientific American Supplement 1538 gives the proportion of gravel and sand to be used in concrete.

Scientific American Supplements 1567, 1568, 1569, 1570, and **1571** contain an elaborate discussion by Lieut. Henry J. Jones of the various systems of reinforcing concrete, concrete construction, and their applications. These articles constitute a splendid text book on the subject of reinforced concrete. Nothing better has been published.

Scientific American Supplement 997 contains an article by Spencer Newberry in which practical notes on the proper preparation of concrete are given.

Scientific American Supplements 1568 and 1569 present a helpful account of the making of concrete blocks by Spencer Newberry.

Scientific American Supplement 1534 gives a critical review of the engineering value of reinforced concrete.

Scientific American Supplements 1547 and 1548 give a resume in which the various systems of reinforced concrete construction are discussed and illustrated.

Scientific American Supplement 1564 contains an article by Lewis A. Hicks, in which the merits and defects of reinforced concrete are analyzed.

Scientific American Supplement 1551 contains the principles of reinforced concrete with some practical illustrations by Walter Loring Webb.

Scientific American Supplement 1573 contains an article by Louis H. Gibson on the principles of success in concrete block manufacture, illustrated.

Scientific American Supplement 1574 discusses steel for reinforced concrete.

Scientific American Supplements 1575, 1576, and 1577 contain a paper by Philip L. Wormley, Jr., on cement mortar and concrete, their preparation and use for farm purposes. The paper exhaustively discusses the making of mortar and concrete, depositing of concrete, facing concrete, wood forms, concrete sidewalks, details of construction of reinforced concrete posts.

Each number of the Supplement costs 10 cents.

A set of papers containing all the articles above mentioned will be mailed for $1.80.

Order from your newsdealer or from

MUNN & CO.
361 Broadway, New York City

Classified Advertisements

Advertising in this column is 50 cents a line. No less than four nor more than ten lines accepted. Count seven words to the line. All orders must be accompanied by a remittance. Further information sent on request.

SALE AND EXCHANGE.

THE LOCKE BABY JUMPER.—Just the thing for Christmas. Healthful, amusing, time-saving. $2.50, $4.00, $5.00 delivered. Circular free. Order now. C. E. Locke Mfg. Co. 25 J. St. Kensett, Iowa.

FOR SALE.—Engine Lathe, swings 9½ in. takes 25 in. between centers; complete with full set change gears to cut all size threads, 3 to 40 in.; price only $41.00. Address L. F. Grammes & Sons, Allentown, Pa.

BUSINESS OPPORTUNITIES.

A FEW DOLLARS will start a prosperous mail order business. We furnish catalogues and everythingnecessary. By our easy method failure impossible. Write today. Milburn-Hicks Co, 718 Pontiac Building, Chicago.

INVENTIONS DESIGNED, perfected and made practical and valuable. We show how to make correctly; where to manufacture and how to sell. Make Examinations, drawings, experimental work, etc. Address Engineering Dept., Industrial Bureau, Ithaca, N. Y.

WANTED.—To correspond with first-class artisans in the following lines: Model makers, Automobile repair men, Metal Pattern makers and Tool makers with view to offering steady employment after February 1st, 1907. H. A. Thexton, 513 So. 3d St., Minneapolis, Minn.

THE MUSICIAN, for Lovers of Music. 24 pages music in each number, may be added to any club offer of the Subscription Agencies for $1.50. Order of any agency or direct of us. Oliver Ditson Co., 58 Mason St., Boston.

FOR SALE.—Portable Compressed Air House Cleaning Wagons and Machinery sold to responsible parties to operate in cities of from five thousand inhabitants upwards. Each Portable Cleaning Plant has an earning capacity of from $50.00 to $70.00 per day, at a cost of about $8.00 per day. Capital required from $2,000.00 upwards. Stationary Residential Plants also from $350.00 upwards. Over 100 companies operating our system. We are the pioneers in the business, and will prosecute all infringers. State references. Address General Compressed Air House Cleaning Co., 4453 Olive Street, St. Louis, Mo.

I SELL PATENTS.—To buy or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

STEEL WHEELS to fit any wagon or cart. Made any size, any width of tire. Also handy wagons with low wheels and wide tires. Wood wagons with steel wheels, or steel wagons with steel wheels. Log wagons and heavy traction wagons of all kinds, for horses or traction engine power. Steel axles of any size and shape. Address Electric Wheel Company, Walton Square, Quincy, Ill., U. S. A.

GRAND CHANCE FOR A CAPITALIST with $10,000, to share control with inventor and equip factory for making an absolutely waterproof, sanitary and fadeless wallpaper at reasonable prices. Process not experimental; paper artistic and fit for any room. No special coating. Immense demand assured. Sample and full particulars. Address W. B. Ellis, 11 East 42nd Street, New York.

WE MANUFACTURE METAL SPECIALTIES of all kinds. Best equipment. Send sketch or model for estimate, stating quantity. Hayes Manufacturing Co., 465-75 Maybury Avenue, Detroit, Mich.

TYPEWRITERS.

TYPEWRITER "Bargain List" free. Deal direct, save agents' commissions. Underwoods, Remingtons, Olivers, $38; others $15, $25, shipped on trial. Old Reliable, Consolidated Typewriter Ex., 243 Broadway, N.Y.

SPECIAL BARGAINS.—Remington No. 2, writing two colors; Densmore, Hammond, Franklin $15 each, shipped privilege of examination. Write for complete catalogue "F," Eagle Typewriter Co., Suite 11, 237 Broadway, N.Y.

TYPEWRITERS OUR OWN MANUFACTURE fully guaranteed at special prices to those who will recommend the American to their friends. American Typewriter Co, 261 Broadway, New York.

CLEARANCE SALE.—Remingtons, Densmores, Jewetts, Blickensderfers, Williams, $12.50. Franklins, Postals, Hammonds, $10. Underwoods, Olivers, $35. Orders filled or money back. Standard Typewriter Exchange, Suite 45, Broadway. New York.

TYPEWRITERS.—All makes, all prices. Twelve stores in principal cities. Catalogue and address of nearest store sent on request. The Typewriter Exchange Company, Dept. A, 343 Broadway, New York.

POSTAL Typewriter $25. Only real typewriter at low cost. Combines Universal Keyboard, strong manifolding, mimeograph stencil cutting. Visible writing, interchangeable type, prints from ribbon. Imperfect alignment impossible. Will stand hardest wear; practically accident proof. Agents wanted. Write Postal Typewriter Co., Dept. 17, Norwalk, Conn.

TYPEWRITERS.—For a minister, lawyer, literary man or woman, or any person who writes, or for people who wish to learn a desirable and lucrative occupation, can you imagine a more acceptable gift than a No 2 Sun Typewriter, at $40.00? Sent upon examination to responsible parties. For full information and particulars, address Sun Typewriter Company, 317 Broadway, New York.

HELP WANTED.

OPPORTUNITIES describes hundreds of high grade positions for business and technical men. Sample copy free if you state experience. Service confidential. Hapgoods, 305 Broadway, New York.

WANTED.—A Foreman to take charge of machine shop in manufacturing plant, having from 12 to 14 machinists in his charge. Applicant must be thoroughly posted in the manufacturing of blanking and drawing dies. Good position for the right party. State salary and give references. Foreman, Box 773, New York.

WANTED TO BUY outright several Patents of small articles not requiring heavy machinery to manufacture. Address W. V., Box 773 New York City.

WANTED.—Salesmen to handle high grade, art post cards as side line. Stationers, hotels, newsdealers, cigar stores, drug stores, dry goods merchants, all handle post cards. Excellent chance to make big money on the side. K. B. Gould, care Rotograph Co., 684 Broadway, N. Y.

SUPERINTENDENT for electrical plant $2500, Draftsman $1000, Manager $1500, Bookkeeper $1200, Salesman $1800. Other positions on file. Write for list and plan. Business Opportunity Company, 1 Union Square, N. Y.

UNUSUALLY GOOD SALARIES and a strong demand for men in the photo-engraving business. The wonderful increase in the use of illustrations in all newspapers and magazines creates an unfilled call for men to turn out cuts. Twenty-five Dollars to Fifty Dollars a week is easily made. You can learn this paying trade in New York day or evening. Address United States School of Photo-Engraving, 466 Pearl Street, corner Park Row, New York.

WANTED.—Competent Draughtsman and Designer with experience in handling men, for position with machine shop. Salary $1,500 to $1,800 per year depending on experience. Apply to Draughtsman, Box 773, N. Y.

ACETYLENE GENERATOR PATENT FOR SALE.

A. Ross system, carbide to water, measured quantities. No. 690,773 (1900) for stationary lighting. B. Water to Carbide, No. 738,070 (1902) for use on vehicles, absolutely steady supply without attention from user, and unaffected by vibration. Apply J. T. Williams & Co., Ltd., Acetylene Engineers, Birmingham.

EXPERIMENTAL WORK.

JOHN F. PITZ, INC., 89 FRANKFORT ST., makers of patterns and models. Every facility for aiding inventors to perfect their ideas. Large and small contracts executed promptly. Machine patterns a specialty.

PATENTS FOR SALE.

PATENT FOR SALE.—Will sell outright or on royalty Patented Ventilated Lid for dinner pails, dairy and culinary vessels. Easy and cheap to manufacture. Being a household article of great merit. Big sales and profits can be made with capital to push same. Address E. L. Bauer, Wellsburg, W. Va.

AUTOMOBILE PATENT FOR SALE.—Protects damaged tires, prevents skidding. Sure of big sale. Made cheaply. Not able to manufacture. Will sell patent or on royalty. G. Adams, 1000 Spruce St., St. Louis, Mo.

OFFERS INVITED FOR PURCHASE OF UNITED States Patent covering novel and useful device for feeding horses. Better than nose bags. Wm. Oliver, 3116 P Street, Georgetown, D. C.

PATENT FOR SALE.—I want to sell outright the proprietary rights in my new Improved Metal Fence Post, sure to be used in all parks, farms and gardens. C. C. Dolan, 324 Green Street, Lockport, N. Y.

PATENTS SOLD ON COMMISSION.—If you wish to buy or sell a patent write for particulars to E. L. Perkins, 72 Broad Street, Boston. Patent Sales Exclusively.

PARTNERS WANTED.

WANTED.—Partner with money to manufacture and place upon market Razor Stropping Machine any one can use—does quick work—bears good profit. For full particulars address H. P. Fowler, Pelham, S. C.

MACHINERY FOR SALE.

ALWAYS ON HAND, good second-hand machinery, also boilers and engines, dynamos and motors; from smallest to largest. Write us before ordering elsewhere. Liberty Machinery Mart, 138 Liberty St., New York.

EXCEPTIONAL BARGAINS this week: Several 14-inch swing American Fox lathes, with chasing bar, detachable compound rest, countershaft, complete; also 25-foot draw bench; 10-foot cornice brake; 8-foot squaring shears; two heavy stamping and punch presses. Liberty Machinery Mart, 138 Liberty St., New York.

IF interested in power for any kind of light manufacturing, electric lighting, marine or other purposes, get information on the most improved kerosene oil engine by sending for catalogue to Remington Oil Engine Co., 41 Park Row.

STEAM BOILERS.

THE RECORD of the Hogan Water Tube Boiler proves it the safest, most reliable and efficient steam generator known. Built only by James Dean, Ridgefield Park, N. J. Information for the asking.

FACTORY AND MILL SUPPLIES.

PUT IN WATER WORKS at your country home. A Caldwell Tank and Tower is the thing. Substantial, efficient, ornamental, inexpensive and frost proof. Dozens near you. A. E. Woodruff, of Mt. Carmel, Conn., says: "My outfit has been in use eleven years without any expense." Write for Water Works Catalogue and Price List. W. E. Caldwell Co., Station DD, Louisville, Ky.

GAS-LIGHTING APPLIANCES.

THE "PNEU-WAY" of lighting gas! Lights Welsbachs without electricity from button on wall! Easily installed, ever lasting. Ask your gas company or write Pneumatic Gas Lighting Company, 150 Nassau St., N. Y. Thousands in use.

IDEAL EYE MASSEUR.

A MOST VALUABLE AND SUITABLE PRESENT. Indistinct vision, muscular troubles, and chronic diseases of the eye successfully treated by scientific massage. Read illustrated treatise on the eye. Mailed free. The Ideal Co., 239 Broadway, New York.

DRAMATIC.

YOUNG MEN WANTED to learn stage management, acting, stage dancing, makeup, etc. Engagements given to graduates at from $25 to $50 per week; day and evening classes; instruction costs about $1 an hour; take a trial lesson at $2 and be convinced that you can learn. For full particulars and information, write, telephone, or see Ned Wayburn, 115 West 42nd Street, New York.

ASTRONOMY.

STARS AND PLANETS.—Learn to know them at a glance! Astronomy in simplest and most fascinating form. The Revolving Planisphere shows clearly principal stars visible any hour in year. Simple, handy, reliable. Only 83c. T. Whittaker, Publisher, 123 Bible House, New York.

Wagon, dumping, D. J. Waterous	836,723
Wagon jack, J. Rocke	836,829
Wagon unloading attachment, H. L. Wishon	837,170
Wall tie, F. A. Cammann	836,960
Wall tie, P. J. Shrum	837,133
Walls of buildings, construction of, J. N. Wolfe	836,908
Washboards, soap holder for, A. H. Bruce	837,186
Watch safety device, F. D. Ely	837,206
Water by means of an electric current, apparatus for the sterilization of, M. Otto	837,107
Water cooling apparatus, W. Ostendorff	836,702
Water elevator, H. Cole	836,865
Water sterilizing apparatus, M. Otto, 837,108,	837,109
Weaner, calf, A. W. Swender	836,949
Weighing machine, coin controlled, C. J. Harrington	836,926
Weld making apparatus, J. C. Perry	837,249
Well drilling machinery, M. McCain	836,984
Well drilling machines, mast for, M. McCain	836,985
Wheel, J. Thomson, 837,150 to	837,153
Wheel block, J. T. Lowe	837,235
Whip socket, R. H. Heberling	837,222
Wind chest, compound or duplex, P. Wirsching	836,907
Window fastener, E. F. Kapus	836,810
Window fixture, C. A. Moore, Jr.	837,096
Window screen, M. M. Eidsmore	837,204
Window, show, N. Fells	837,210
Wire tensioning device, J. Kelley	836,977
Wood cleaning and polishing device, J. W. & H. F. Plummer	837,115
Work table, Guttenberg & Nemeth	836,879
Wrapping machine, J. P. Wright	836,728
Wrench. See Pipe wrench.	
Wrench, J. H. Holman	837,225
Wrench, M. Wenger	837,254

DESIGNS.

Book or catalogue cover, H. B. Keiper	38,329
Casket plate and handle, E. Cleff	38,328
Locket or charm, A. C. Field	38,320
Spoons, forks, or similar articles, handle of, G. F. Kolb	38,323
Table use, vessel for, F. G. Holmes	38,324
Toy safe bank, E. Headley	38,326
Toy whip, F. E. Timmins	38,325
Typewriter frame, J. Alexander	38,327
Watch fob, P. Flaherty	38,321
Watch fob, G. W. Parsons	38,322

TRADE MARKS.

Agricultural machinery, certain named, Ohio Cultivator Co	57,757
Ale, Suffolk Brewing Co	57,662
Beer, Meux's Brewery Co	57,655
Beer, Anheuser-Busch Brewing Association, 57,669, 67,670,	57,691
Beer, C. Kern Brewing Co	57,697
Beer, lager, Mathie Brewing Co.	57,680, 57,718
Beer, porter, and malt extract, Indianapolis Brewing Co	57,711

An Ideal Christmas Gift

BOUCHER ADJUSTABLE SHAVING GLASS

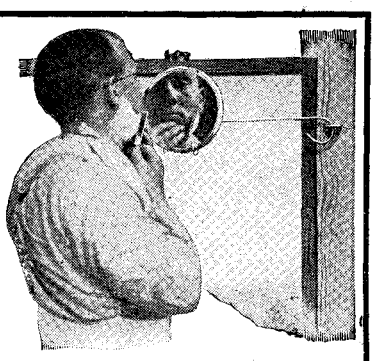

Every man should have one.

It makes shaving safe and comfortable.
It may be applied to any window, or elsewhere to obtain a strong light, and instantly adjusted to any angle.
It may be carried safely in a satchel.

Furnished express paid.

Chipped Edge, $2.00; Beveled Edge, $2.00

Send for circular.

CALDWELL MANUFACTURING CO., 3 Jones Street, Rochester, N. Y.

VOSE

Have Been Established 55 Years

and are receiving more favorable comments today from an artistic standpoint than all other makes combined.

We Challenge Comparisons.

By our easy payment plan every family in moderate circumstances can own a **vose** piano. We allow a liberal price for old instruments in exchange, and deliver the piano in your house free of expense. You can deal with us at a distant point the same as in Boston. Catalogue, books, etc., giving full information mailed free.



VOSE & SONS PIANO CO.
160 Boylston St.,
Boston, Mass.

PIANOS

$400 1907 MODEL



2 PASSENGER RUNABOUT

The car of smallest cost and greatest accomplishment. Holds world's record for efficiency, economy and endurance. Smart to look at. Simple to operate. Economical to maintain. 4 H. P. air-cooled. Reliable under all conditions, all roads. Speed 30 miles an hour. Forward and reverse. Catalog free.

ORIENT

FRICTION DRIVE

BUCKBOARDS

DELIVERY CAR

It does the work of three teams. A motor car of *proven efficiency* for Parcel and Express Delivery. An ideal car for every kind of business and every form of merchandise, in cities, towns and villages. Makes money by saving time—prompt delivery makes satisfied customers. Few parts and every part strong. 4 H.P. Air-cooled. Weight 670 lbs. Capacity 600 lbs. including passengers. Speed 4 to 18 miles an hour on ordinary roads

Active agents desired in unassigned territory. Write for discounts and agency terms.

Waltham Manufacturing Co.
Waltham, Mass., U. S. A.

$450



A 25-Watt Dynamo $5.00

Wrought-iron fields, rocking brush holder, **compound winding** giving **steady voltage.** Can be used as either shunt, series or compound. **Runs equally well as a motor.** First-class in every way. Send for one.

E. Q. WILLIAMS
537 S. Clinton St., Syracuse, N. Y.

YOUR PATENT

Carefully Developed May Be a Success!

Development of ideas, experiments, models. Specialty, small machinery and fine instruments. Modern equipments. Technical office. Mechan. Electrical Engineers **RICHTER BROS.** and Manufacturers, 115 Court Street, Hoboken, N. J. Two minutes from D. L. & W. Depot.

COPYRIGHT 1903 BY COLLIER'S WEEKLY

WOULD you like a copy of the new catalogue of the Collier artist proofs, containing 132 reproductions, in half-tone and line engraving, of the works of Gibson, Remington, Frost, Parrish, Penfield, and many other leading American artists?

The engravings in this catalogue are made from the originals, which were drawn exclusively for Collier's. They are exact reproductions in black and white, and show the entire collection of proofs, with sizes, prices, and descriptions.

You can get an idea of the beauty and value of this catalogue when you realize that it contains 48 Gibson Reproductions, 29 Remingtons, and 55 others—132 in all.

We can not afford to send it free, but if you will send us five two-cent stamps to cover charges we will mail you a copy postpaid. Write your name and address plainly on the order form, and send it with the five stamps to

Proof Dept., P. F. Collier & Son, 420 West Thirteenth St., New York

ORDER FORM

.....190

P. F. COLLIER & SON
New York City

Dear Sirs: Enclosed find five two-cent stamps to pay charges on one copy of your new catalogue of artist proofs.

Name.....

Address.....

Sc. A.

Valuable Books
Home Mechanics for Amateurs

This book has achieved an unparalleled success in one week, and a Special Edition of 4,000 copies has been ordered. It is by far the largest and best book on the subject ever offered at such a low price. It tells how to make things the right way—the "only" way—at small expense. It will prove of value to you—much more than you realize. Do things with your hands. Send for a circular giving contents—the circulars cost only a cent—the book $1.50 postpaid. If the book could meet you face to face you would be the first to purchase. The first large edition is almost gone, order to-day.



370 Pages 326 Engravings Price $1.50

TWENTY-THIRD EDITION

EXPERIMENTAL SCIENCE.

By GEORGE M. HOPKINS

Revised and Greatly Enlarged. 2 *Octavo Volumes.* 1,100 *Pages.* 900 *Illustrations. Cloth Bound, Postpaid,* $5.00. *Half Morocco, Postpaid,* $7.00.

EXPERIMENTAL SCIENCE is so well known to many of our readers that it is hardly necessary now to give a description of this work. Mr. Hopkins decided some months ago that it would be necessary to prepare a new edition of this work in order that the many wonderful discoveries of modern times might be fully described in its pages. Since the last edition was published, wonderful developments in wireless telegraphy, for example, have been made. It was necessary, therefore, that a good deal of new matter should be added to the work in order to make it thoroughly up-to-date, and with this object in view some 200 pages have been added. On account of the increased size of the work, it has been necessary to divide it into two volumes, handsomely bound in buckram.



REVISED and ENLARGED EDITION

The Scientific American

Cyclopedia

Of Receipts, Notes and Queries.

15,000 Receipts. 734 Pages.

Price, $5.00 in Cloth. $6.00 in Sheep. $6.50 in Half Morocco. Post Free.



This work has been revised and enlarged,

900 New Formulas.

The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full **Table of Contents** will be sent on application.

Those who already have the Cyclopedia may obtain the

1901 APPENDIX.

Price, bound in cloth, $1.00 postpaid.

MAGIC

Stage Illusions and Scientific Diversions, including Trick Photography

This work appeals to old and young alike, and it is one of the most attractive holiday books of the year. The illusions are illustrated by the highest class of engravings, and the exposés of the tricks are, in many cases, furnished by the prestidigitateurs themselves. Conjuring, large stage illusions, fire-eating, sword-swallowing, ventriloquism, mental magic, ancient magic, automata, curious toys, stage effects, photographic tricks, and the projection of moving photographs are all well described and illustrated, making a handsome volume. It is tastefully printed and bound. Acknowledged by the profession to be the **Standard Work on Magic.**

By A. A. HOPKINS. 563 pages. 420 illus. Price **$2.50.**

JUST PUBLISHED

Scientific American Reference Book

12mo. 516 Pages. Illustrated. 6 Colored Plates. Price $1.50, postpaid



The result of the queries of three generations of readers and correspondents is crystallized in this book, which has been in course of preparation for months. It is indispensable to every family and business man. It deals with matters of interest to everybody. The book contains 50,000 facts and is much more complete and more exhaustive than anything of the kind which has ever been attempted. The "Scientific American Reference Book" has been compiled after gauging the known wants of thousands. It has been revised by eminent statisticians. Information has been drawn from over one ton of Government reports alone. It is a book of everyday reference—more useful than an encyclopedia, because you will find what you want in an instant in a more condensed form. Sixty years of experience alone have made it possible for the publishers of the SCIENTIFIC AMERICAN to present to the purchasers of this book a remarkable aggregation of information.

MUNN & CO., Publishers, 361 Broadway, NEW YORK

Bells, certain named, Frank Mossberg Co..	57,780
Beverage, carbonated tonic, Whitmer & Barnett	57,686
Biscuits and bread, brittle, H. A. C. Dahl	57,701
Bitters, E. Gross	57,859
Boiler water gage glasses, Joseph Tomey & Sons	57,786
Book makers' machines, certain named, Smyth Manufacturing Co.....57,766,	57,800
Boots and shoes, leather, P. W. Hessberg	57,782
Boots, shoes, and slippers, leather, M. D. Wells Co.	57,834
Bread, baked, Heissler and Junge Co.	57,734
Candy, Allen Candy Co.	57,688
Candy, Lipps-Murbach Co. of Baltimore City	57,715
Candy, Manufacturing Company of America..	57,717
Canned fruits and vegetables, Pratt-Low Preserving Co.	57,658
Canned fruits and vegetables, Stone-Ordean Wells Co.....57,660,	57,661
Car journal boxes, railway, National Malleable Castings Co.....57,754,	57,755
Car movers, R. Miller	57,753
Catchup, Joseph Campbell Co.	57,712
Cement, Portland, Western States Portland Cement Co.	57,724
Chain and chain links, Standard Chain Co.	57,767
Chisels, drawing knives, planes, saws, and augers, Jennings & Griffin Manufacturing Co.	57,784
Chocolates, Ginter Grocery Co.	57,705
Cigars, Bethesda Cigar Co.	57,776
Cleaning powder, Lavaline Manufacturing Co.	57,653
Coffee, W. M. Swindler	57,664
Coffee in the bean, F. H. Beimes	57,695
Coffee substitutes, American Holo Co.	57,689
Conveying and hoisting machinery, Robins Conveying Belt Co.	57,819
Corsets and corset waists, Benjamin & Johnes	57,802
Cotton piece goods, Arnhold, Karberg & Co., 57,774, 57,825 to	57,830
Crayons, school and artists', American Crayon Co. 57,823,	57,824
Cream, milk, butter, and cheese, H. Lacy	57,652
Creams or lotions, skin, R. K. Henry	57,860
Creams, toilet, Cosmo Co.	57,851
Cutlery, certain named, Landers, Frary and Clark	57,788
Dust of carpeted floors, preparations for laying the, Disinfectant Dustlayer Co....	57,853
Dyes, William Edge & Sons	57,874
Earthenware, earthenware blocks and sewer pipes, Bessemer Limestone Co.	57,726
Egg beaters, rotary, Taplin Manufacturing Co.	57,768
Egg preserving preparations, Acme Egg Preserving Co.	57,842
Fertilizer compound, odorless chemical, N. A. Niemann	57,739
Fertilizer distributers, T. E. & C. S. McCall	57,790
Fertilizers, Georgia Chemical Works	57,832
Fertilizers, Virginia-Carolina Chemical Co...	57,839
Fishing supplies, certain named, H. Milward & Sons	57,707
Flour, wheat, Duluth-Superior Milling Co...	57,673
Flour, wheat, Mapleton Milling Co.	57,679
Flour, wheat, Waco Mill & Elevator Co...	57,685
Flour, wheat, A. H. Herrick & Son	57,687
Flour, wheat, Bulsing & Heslenfeld	57,696
Flushing devices for lavatories, water closets, etc., Kenney Manufacturing Co..	57,752
Foods, infants' A. Castaing	57,638
Fruits, fresh, canned, and preserved, Tropic Fruit Co.	57,665
Game apparatus and implements, certain named, Bridgeport Athletic Manufacturing Co. 57,727,	57,728
Gilding preparation, liquid, Roessler & Hasslacher Chemical Co.	57,740
Gin, R. Burnett & Co.	57,636
Gin, Corning & Co.	57,639
Ginghams, Highland Park Manufacturing Co.	57,807
Greases, lubricating oils and mixtures, Ironsides Co.	57,735
Hair tonics, A. Cristadoro	57,852
Hats, stiff fur, J. B. Murphy & Co.	57,835
Horseshoes, Neverslip Manufacturing Co...	57,756
Hosiery, Holeproof Hosiery Co.	57,783
Hosiery, Marshall Field & Co.	57,812
Hosiery, Racine Feet Knitting Co.	57,837
Insecticide, W. C. Gordon	57,858
Insulated receptacle for maintaining heat, Calorie Fireless Cookstove Co.	57,698
Insulating material, Ohio Brass Co.	57,792
Insulation, heat or cold, R. E. Kramig & Co. 57,677,	57,678
Knitted stockings, J. A. Parker	57,816
Knitted underwear, Ryff & Co.	57,838
Knives, razors, scissors, and shears, table and pocket, Dunham, Carrigan & Hayden Co. 57,746,	57,747
Knives, shears and scissors, pocket and table, Baker & Hamilton	57,775
Knives, table and carving, Landers, Frary & Clark	57,787
Lamp and lantern burners, oil burning, R. E. Dietz Co.....57,761 to	57,765
Lamps and lanterns, oil burning, R. E. Dietz Co.....57,760, 57,793,	57,794
Lamps, incandescent electric, General Electric Co. 57,751, 57,804,	57,805
Lamps, oil, Standard Oil Co.	57,820
Lamps, oil burning engine, switch, and rear-signal, R. E. Dietz Co.....57,796,	57,798
Lamps, oil burning vehicle, R. E. Dietz Co. 57,795,	57,797
Lanolin and preparations thereof, Wollwascherei und Kammerei, Dohren bei Hannover	57,875
Lanterns, Hibbard, Spencer, Bartlett & Co.	57,806
Lanterns, tubular, R. E. Dietz Co.	57,759
Leather, harness and saddlery, W. W. Mooney & Sons	57,841
Lightning arresters, General Electric Co....	57,750
Liniment, F. S. Mason	57,865
Liniment, Olney & McDaid	57,868
Liqueur, Societe Anonyme de la Distillerie de la Liqueur Benedictine de l'Abbaye de Fecamp	57,685
Lithographic stone cleaning and preparing compound, J. James	57,676
Locks, padlocks, and keys, Miller Lock Co.	57,791
Lubricators, Comstock Engine Co.	57,744
Mail chutes, Cutler Mfg. Co.	57,745
Maraschino cherries, bottled, Hannah & Hogg	57,642
Medicinal beverages for certain named diseases, G. F. Heublein & Bro.	57,857
Medicinal fluid extracts, Eli Lily & Co....	57,855
Medicines, certain named, Brown Mfg. Co..	57,845
Medicines, certain named, N. W. Long	57,864
Medicines, certain named, Peerless Medicine Co.	57,869
Metal, glass, and marble, material for cleaning and polishing, Matchless Metal Polish Co.	57,736
Musical instrument strings, Lyon & Healy, 57,810,	57,811
Nails, F. W. Whitcher	57,770
Oats, compressed rolled, Great Western Cereal Co.	57,732
Oil, sewing machine and bicycle, Griggs, Cooper & Co.	57,733
Ointment, Medical Lake Salts Mfg. Co....	57,866
Paint, fireproof, Retardo Fireproofing Co....	57,681
Paint pigments, colored, Vane-Calvert Paint Co.	57,741
Painters' materials, certain named, Senour Manufacturing Co.	57,683
Pants and trousers, L. Robinson	57,799
Paper, building and roofing, C. S. Garrett & Son Co.	57,730
Paper, toilet, Jones & Skinner	57,809
Papers, wrapping, C. S. Garrett & Son Co..	57,729
Pastils for throat J. Bengue	57,844
Pens, fountain, Parker Pen Co.	57,817
Pepper, New York Coffee Co.	57,721
Pianos, Hume Piano Co.	57,808
Pianos and automatic piano players, Krakauer Bros.	57,863
Pipe fittings, Thomas Devlin Manufacturing Co.	57,769
Potato chips, New Haven Dairy Co.	57,720
Presses and sausage stuffers, lard and fruit, Landers, Frary & Clark	57,833
Remedy for certain named diseases, Drake Co.	57,854

LEARN WATCH REPAIRING

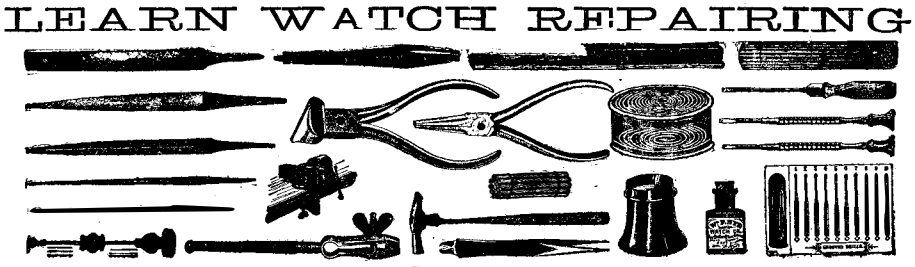

It's a trade easily learned; we will show you how absolutely **Free of Charge.** Our complete illustrated instruction book enables you to do the work at home giving you every advantage of the apprentice. **Instruction Book and Complete Outfit of Tools by express $5.50.** Send for our free Wholesale Catalogue of Watches, Diamonds, Jewelry, Clocks, Silverware, etc., with confidential discounts. We will also send you free of charge our Watchmakers' Tool and Material Catalogue with Illustrated Instruction Book. WRITE TO-DAY.

ROGERS, THURMAN & CO., Jeweler's Wholesale Supply House, 34 to 44 Michigan Ave., Chicago, Ill., U. S. A.

SPLENDID 4 Christmas Gifts 4
For All the Family
At Special Holiday Prices!

THE "LITTLE WONDER" WATER MOTOR, the handiest bit of machinery in the world. For grinding, sharpening, polishing and twenty other uses about the home. Attaches to any water faucet. Regular price $4.00. **With this ad. $3.50.**

THE GAS CANNON, the most remarkable boys' toy of to-day. No powder, no smoke, no odor. Electrically ignited. Fires in the house.



500 shots for one cent and **absolutely no Danger.** The acme of Christmas joy for young America. Price $5.00 or **with this ad. $3.50.**

OUR MATCHLESS CIGAR LIGHTER is the **only** cigar lighter yet invented that **will always work.** "The harder it blows the brighter it glows." **With this ad. only 65 cents. It works all the time!**

"HYDRO-MASSAGE" is a perfect mechanical massage vibrator **for home use.** It runs by the water power from your bath room faucet. Cheap, simple, **reliable,** and economical. Its

use gives a superb complexion, saves the hair, and tones up the whole system. **Splendid after shaving!** Regular price complete $15.00. **To-day $12.00 and this ad. gets it.**

We positively guarantee satisfaction with any of the above articles or will cheerfully **refund your money.** Ask any magazine about us. These articles are **all** of exceptional practical **merit** and their **novelty** and **utility** alike render them the **IDEAL CHRISTMAS GIFTS.** Remit direct or write for attractive free descriptive matter **to-day!**

WARNER MOTOR CO., Inc.
Dept 15 Flat Iron Building, New York City

Wachusett Shirts

THERE is a great difference between a **Wachusett Coat Shirt** and the average pull-over-your-head kind; as great as between a stem winding watch and the old-fashioned key-winder.

You purchase the best watch available, why not apply this rule in the selection of your shirts?

Wachusett Coat Shirts promote ease and dispatch in dressing. Save time, temper, torment. Stylish and durable—cheapest because best. Ask for "Wachusett" make. Booklet Free.

WACHUSETT SHIRT COMPANY
Dept. 2, Leominster, Mass.
Manufacturers of White, Fancy, Negligee and Coat Shirts, Night Robes and Pajamas.

SAVE MONEY
Magazines You Need at a Low Rate

THE COSMOPOLITAN,	$1.00	OUR PRICE
THE WORLD TO-DAY,	1.50	$1.50
To one address only,	$2.50	
THE WORLD TO-DAY,	$1.50	
COSMOPOLITAN,	1.00	
AMERICAN MAGAZINE, or SUCCESS, or WOMAN'S HOME COMPANION,	1.00	$2.30
	$3.50	
THE WORLD TO-DAY,	$1.50	
OUTING MAGAZINE,	3.00	
AINSLEE'S	1.80	$3.50
	$6.30	

WRITE FOR OTHER OFFERS

THE WORLD TO-DAY is a monthly world review and a family necessity. It is not a dry-as-dust record of events and is not made up of clippings from other publications. It obtains its information from original sources and is reliable and always up-to-date. Its contributors are the foremost men and women of the day. It mirrors the life of the world in all of its phases, and by its method of treatment makes fact as entertaining as fiction. The reader will find in it recreation for the idle hour, and, best of all, something worth while. A strong feature is its illustrations, many of which **are in colors.**

All other magazines of its class sell at $3.00. THE WORLD TO-DAY is but $1.50. Its remarkable quality and low price make it an exceptional bargain.

STANDARD SIZE. ILLUSTRATIONS IN COLORS
$1.50 a Year. Sample Copy 15 Cents
THE WORLD TO-DAY, 1138, 67 Wabash Ave., Chicago

RUBBER STAMP MAKING.—THIS article describes a simple method of making rubber stamps with inexpensive apparatus. A thoroughly practical article written by an amateur who has had experience in rubber stamp making. One illustration. Contained in SUPPLEMENT **1110.** Price 10 cents. For sale by Munn & Co. and all newsdealers.

Mechanically perfect and guaranteed.

Patented

"EXER-KETCH" IRON AUTO

(Patented)

Adjustable in size to fit any boy or girl as they grow from 3 *years to* 15 *years.* **"Geared"** *for fastest speed,* but runs easier. Stronger ("it's iron") but lighter weight. Rider has absolute control riding forward or backward, *coasting or climbing a hill.* **"Can't upset."** No dead center. **"CAN'T BE BROKEN and won't wear out."** A straight pull (ordinary-hand-car-motion), instantly interchangeable to the exact "Rowing and Semi-Rowing" exercise motions. *Designed by a Physician* to develop and strengthen the *spine* and *chest,* and *rest* the child's legs. **Write for our free offer.**

"Exer-Ketch" Novelty Co., 106 N. Senate St., Indianapolis, Ind.

Wizard Repeating
LIQUID PISTOL

Will stop the most vicious dog (or man) without permanent injury. Perfectly safe to carry without danger of leakage. Fires and recharges by pulling the trigger. Loads from any liquid. No cartridges required. Over 6 shots in one loading. All dealers, or by mail, **50c.** Rubber-covered holster, **5c.** extra

Parker, Stearns & Co., 226 South St., Dept. G, New York



A SEWING MACHINE

operated by water costs nothing to run, and will save its cost in Doctor's bills. Water Motors made by us are guaranteed to run five years without repairs.

Patented June 28, 1898. 7 inch Motor. Prices from $10 up, including brake attachment. Agents wanted. Send 10 cents for copyrighted booklet.

A. ROSENBERG MOTOR AND MFG. CO.
Established 1894
Baltimore, Md., U. S. A.

"Success" Automobile, $250



Practical, durable, economical and absolutely safe. A light, strong, steel-tired Auto-buggy. Suitable for city or country use. Speed from 4 to 20 miles an hour. Our 1907 Model has an extra powerful engine, patent ball-bearing wheels; price, $275. Also 10 h.p. $400. Rubber tires $25 extra. **Write** for descriptive literature.

"Success" Automobile Mfg. Co., St. Louis, Mo.

Write to-day



Catalog free with full information

MOTSINGER AUTO-SPARKER
starts and runs Gas Engines without Batteries.

No other machine can do it successfully for lack of original patents owned by us. No twist motion in our drive. No belt or switch necessary. No batteries whatever, for make and break or jump-spark. Water and dust-proof. Fully guaranteed.

MOTSINGER DEVICE MFG. CO.
14 Main Street, Pendleton, Ind., U. S. A.

New Catalogue of Scientific and Technical Books

A new 112-page Catalogue is now ready for distribution. It is entirely new and lists 5,000 of the latest and best books of a scientific and technical nature. Copies are being mailed to all subscribers to our periodicals, but those who purchase our publications at news stands, or read them in libraries, should send at once for a copy of our Catalogue, which will be mailed free to any address in the world.

MUNN & COMPANY, Publishers, 361 Broadway, New York City

On almost every GOOD Car

You'll see

Contains ready-generated Acetylene Gas ready for use at any time at the turn of the key.

Forty hours light at the turn of a key.
Tanks last FOREVER.
No bother. No trouble.
No Carbide. No Water.
No Dust.
Just pure white light at the turn of a key.

This little tank holds enough Compressed Acetylene Gas (already generated and purified) to supply two big lamps for forty hours. Old empty tanks exchanged for new full ones at dealers and garages in over 400 cities.



Address for full particulars
THE PREST-O-LITE CO., Dept. 25, Indianapolis, Ind.

Tours

Personally Conducted — Exclusively First-Class—to California—January 10th, February 7th and March 2nd under the auspices of the tourist department, Chicago, Union Pacific and North-Western Line;

Include all expenses

—hotels, railway fare, sleeping car and dining car accommodations of the finest character, and numerous side trips. So arranged as to spend the disagreeable portions of the winter months in comfort and ease.

Write for itineraries and full particulars to S. A. Hutchinson, Manager, 212 Clark Street, Chicago, Ill.

PC163

THE MIETZ & WEISS



Send for Catalogue

OIL ENGINES

Stationary 1½ to 80 H. P.
Marine 3½ to 100 H. P.

Use KEROSENE and FUEL OILS. Direct connected Generators, Pumps, Air Compressors, Hoists, etc. Thousands in use in all parts of the world.

AUGUST MIETZ
128-138 Mott St., New York, U.S.A.



Clearing Sale Slightly Used Typewriters

We own and offer as wonderful bargains, 1,500 typewriters which have been used just enough to put them in perfect adjustment. **Better than new.** Shipped on approval, free examination. 1,000 new *Visible Stoles* machines, built to sell for **$95**—our price while they last, **$45.**

FREE catalogue containing unparalleled list of splendid typewriter bargains. Send for it **to-day.**

Rockwell-Barnes Co., 1659 Baldwin Bldg.. Chicago, Ill.

I SELL PATENTS

CHAS. A. SCOTT 819 MUTUAL LIFE BLDG. BUFFALO, N. Y.

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Remedy for the ailments of birds, F. Kaempfer	57,862
Remedy, herb, Alonzo O. Bliss Medical Co.	57,843
Rubber boots and shoes, W. S. Nott Co..	57,840
Rubber collars, Parsons & Parsons.....	57,818
Rubber overshoes, Emergency Rubber Co..	57,803
Rubber soles, heels, and protectors for boots and shoes, Pneumatic Rubber Sole and Heel Syndicate	57,836
Rubber syringes, hard, American Hard Rubber Co.	57,771
Sauce, table, E. A. Wright	57,668
Saws of all kinds, E. C. Atkins & Co. 57,748,	57,749
Seed for lawns, mixed grass, Albert Dickinson Co.	57,822
Sewing machines, sewing machine attachments, covers, tables, and stands, White Sewing Machine Co.	57,873
Sheetings, Carey, Bayne & Smith Co.	57,831
Soap, Fels & Co.	57,674
Soap, Lever Brothers Co.....57,713,	57,714
Soap, N. K. Fairbank Co.	57,738
Soda and baking powder, baking, Church & Dwight Co. 57,847,	57,848
Soda, bicarbonate of, Church & Dwight Co.	57,849
Soda, carbonate of, Holbrook Mfg. Co....	57,861
Spirits and essences, liquid substitute for, J. Simon	57,872
Stain for imitating natural wood on any surface, Heath & Milligan Mfg. Co.,	57,708, 57,709
Stove polish, Cocheco Specialty Co.	57,672
Stoves, burners, and ovens, certain named, American Stove Co.....57,772,	57,773
Stoves, portable, G. P. Heckel.	57,781
Stoves, ranges, and furnaces, Pittsburgh Hardware and Home Supply Co.	57,758
Thread, cotton, Clark Thread Co.....57,777,	57,778
Thread, sewing, John J. Clark & Co.	57,785
Tobacco pipes, wooden, Loewe & Co.	57,789
Toilet preparations, certain named, J. J. Murphy	57,867
Tonic, C. Reinschild.	57,870
Tonic, blood purifier, and remedy for constipation, C. J. Chapple.	57,846
Tools, certain named pneumatic, Aurora Automatic Machinery Co.	57,742
Typewriter ribbons and carbon paper, C. Saltzstein & Bro.	57,871
Typewriting machines and parts therefor, American Typewriter Co.	57,801
Undershirts and drawers, S. F. Swantees..	57,821
Valves, steam and water, Fairbanks Co....	57,779
Varnish, japan, and varnish stains, Murphy Varnish Co.	57,737
Veterinary medicines, certain named, Erb-Ine Veterinary Medicine Co.	57,856
Vinegar, apple butter, jellies, jams, and fruit preserves, C. L. Anderson.....	57,690
Washing compounds, C. A. Winter.....	57,725
Washing machines, rotary, Benbow-Brammer Manufacturing Co.	57,743
Watch insulators, Newark Watch Case Material Co.	57,722
Watches, W. C. Ball .57,631 to 57,634, 57,592,	57,693
Watches and clocks, Mermod, Jaccard & King Jewelry Co.	57,654
Waters, mineral, Eisner & Mendelson Company of New York.	57,702
Wax, laundry, Columbia Wax Works.....	57,850
Wheat farina, pearl barley, and corn starch, E. R. Durkee & Co.	57,731
Whiskies, Freiberg & Kahn.	57,640
Whiskies, Sunset Distilling Co.	57,663
Whisky, Brown-Forman Co.	57,635
Whisky, Calhoun Distilling Co.	57,637
Whisky, Freiberg, Meyer & Co.	57,641
Whisky, H. J. Hellert & Sons.	57,643
Whisky, A. J. Henseler.	57,644
Whisky, B. Holzmark.	57,645
Whisky, Jacobs & Garrett.	57,646
Whisky, Jesse Moore Hunt Co.	57,647
Whisky, S. A. Joseph.	57,648
Whisky, S. Jung & Co.	57,649
Whisky, Kamp Distilling Co.	57,650
Whisky, Kreielsheimer Bros.	57,651
Whisky, Meyer Marx Co.....57,656,	57,657
Whisky, Schuster Co.	57,659
Whisky, Woolner Distilling Co.	57,667
Whisky, A. Baum & Sons.	57,671
Whisky, Jacobs & Garrett.	57,675
Whisky, Sandell Bros.	57,682
Whisky, A. Baum & Sons.	57,694
Whisky, Charles Dennehy & Co.	57,699
Whisky, D. Kelly Co.	57,700
Whisky, Frankfort Distillery.	57,703
Whisky, Freiberg, Meyer & Co.	57,704
Whisky, M. & K. Gottstein.	57,706
Whisky, Hilbert Mercantile Co.	57,710
Whisky, Loeb, Bloom & Co.	57,716
Whisky, Mayer, Sons & Co.	57,719
Whisky, F. C. Renziehausen.	57,723
Whisky, G. A. Dickel & Co.	57,876
Woolens, silks, cotton goods and velvets, M. Rosenbaum's Sons.....57,813 to	57,815

LABELS.

"Amontillado Sherry," for sherry wine, Feldmann Importing Co.	13,218
"Amoroso Sherry," for sherry wine, Feldmann Importing Co.	13,217
"Dime Blend," for coffee, Columbia Coffee Mills	13,214
"Dr. A. C. Daniel's Renovator Powders," for powders for horses and cattle, Dr. A. C. Daniels.	13,210
"Dugong," for whips, United States Whip Co.	13,229
"Excelsior Solitaire," for a game, C. C. Kelly	13,227
"Farmer's Choice," for whisky, J. Grossman's Sons.	13,220
"Genuine German Egg Noodles, Kaiser," for noodles, Milwaukee Noodle Co.	13,212
"Kar-a-van," for tea, Gasser Coffee Co....	13,213
"Kirsch Superieur, M. Arpin," for cherry brandy, L. L. Ardin.	13,219
"Kola-fosfate," for a carbonated beverage, New Orleans Soda Water Co.	13,215
"Manatee," for whips, United States Whip Co.	13,228
"Old Favorite," for whisky, J. Grossman's Sons	13,221
"Oloroso Sherry,' for sherry wine, Feldmann Importing Co.	13,216
"Red Raven Tablets," for medical tablets, N. M. Mendenhall.	13,211
"Shoe Life," for leather preservers, M. F. Peterson & Co.	13,225
"Silico Finish," for wall finish or plaster, United States Gypsum Co.	13,230
"Southern Belle," for whisky, J. Grossman's Sons	13,222
"The Mascot Solitaire," for a game, C. C. Kelly	13,226
"Tryo," for toilet paper, Scott Paper Co..	13,224
"Universal Finish," for wall finish or plaster, United States Gypsum Co.	13,231
"Yeager," for whisky, L. P. Yeager.....	13,223

PRINTS.

"All Around the World," for a breakfast food, Cream of Wheat Co.	1,844
"Buster Brown Playing Cards," for playing cards, United States Playing Card Co..	1,848
"Jungle," for playing cards. H. Ott.....	1,847
"Russell's Regals," for playing cards, Willis W. Russell Card Co.	1,850
"Russell's Regents," for playing cards, Willis W. Russell Card Co.	1,849
"Sommer's German Silver Arch Prop," for arch props, J. L. Sommer.	1,846
"The Professional Baker," for flour, Washburn Crosby Co.	1,845

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address **Munn & Co., 361 Broadway, New York.**

LEARN TO DRAW
MORE SALARY
With the growing importance of machinery and engineering there is an increasing demand for men who understand
Mechanical Drawing
We can prepare you for this work in your spare hours. In our course we employ the method of the leading technical schools—very different from most correspondence schools.
Instruments and Other Drawing Materials Furnished Free.
We would like to send you free our Booklet which tells about the course.
IT MAY START YOU TO SUCCESS.
Massachusetts Correspondence Schools
194A Boylston Street, BOSTON, MASS.

A CONTROLLING INTEREST FOR SALE

at great bargain in New York Corporation owning patented article of universal use, now sold by leading stores throughout United States.

For particulars write or apply to

CHARLES M. CHAPMAN, Attorney
60 WALL STREET, NEW YORK

BRAIN WORKERS—THINKERS!

Have you that clearness of mind so essential to success in your undertakings? You can have, but not until your physical system is right. I want to tell every interested reader of SCIENTIFIC AMERICAN how he may attain perfect physical health by adopting the simplest, most rational and logical method yet known—**RAW FOOD DIET**—not a fad of "cranks," not a theory, but an infallible method of proper eating. Send $1.00 for sack of my **MASCERATED WHEAT** (30 days supply), and convincing letters, or merely write for literature and information blank.
BYRON TYLER, 334 Life Bldg., Kansas City, Mo.

LET US BE YOUR FACTORY
WRITE FOR ESTIMATE ON ANY ARTICLE YOU WANT MANUFACTURED
STAMPINGS, MODELS, EXPER. WORK
WRITE FOR FREE BOOKLET
THE GLOBE MACHINE & STAMPING CO.
970 Hamilton St., Cleveland, O.

Bad —DON'T DRINK— Our Filters Purify, Deodorize, Decolorize. Booklet Free. Buhring Water Purifying Co. 68 Murray St., New York **Water!**

"KNIPE" Pat. BALL BEARINGS
For thrust or weight or both.
No fitting, just push them on.
All sizes 1-4 in. Shaft and up.
10 cts. in Stamps for samples.
PRESSED STEEL MFG. CO., 545 The Bourse, Phila., Pa.

AUTOMOBILE INSURANCE
Every owner of an Auto should insure his car against loss or damage, whether in actual riding or in transit. We fully insure you against such loss or damage, however sustained. Premiums low Fullest reliability.
H. W. BEALS, 76 William Street, New York

FREE ILLUSTRATED ELECTRIC BOOK
We will on request send to you postpaid, this book, also our special plans by which you can secure any article in our catalog **absolutely free.** Write to-day—don't miss this chance. **J. Andrae & Sons Co., 114 W. Water Street, Milwaukee, Wis.**

ICE MACHINES. and Bottlers' Machinery. **Corliss Engines,** Brewers THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery.
E. V. BAILLARD. 24 Frankfort Street. New York.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & CO., 228-229 South Street, New York

Model and Experimental Work. Years of experience. M. P. Schell, 1759 Union St., San Francisco

MODELS & GEARS INVENTIONS PERFECTED UNION MODEL WORKS 193 So. CLARK ST. CHICAGO.

LINENOID.-A MOLDED MATERIAL MADE OF PURE LINEN
CRANE BROS. MANUFACTURERS, WESTFIELD, MASS.

BE A WATCHMAKER
Send for our free book, How to be a Watchmaker. Stone School of Watchmaking, 904 Globe Bldg., St. Paul, Minn.

MODELS CHICAGO MODEL WORKS ESTABLISHED 1867 179 E. MADISON ST. CHICAGO, ILL. WRITE FOR CATALOGUE OF MODEL SUPPLIES.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles $2 up. **OMNIGRAPH CO.,** Dept. 52, **39 Cortlandt St., New York.**

CEMENT BOOKS. How to Use Portland Cement 50c.; Cement Sidewalk Construction, 50c.; Reinforced Concrete Construction, $2.50; Hollow Concrete Block Building Construction, 50c. Sent postpaid. **CEMENT AND ENGINEERING NEWS, Chicago, Ill.**

VENTRILOQUISM
Learned by any Man or Boy at home. Small cost. Send to-day 2-cent stamp for particulars and proof.
O. A. Smith, Room 139, **2040 Knoxville Ave., Peoria, Ill.**

I Print My Own Cards Circulars, books, newspaper. Card press $5. Larger $18. Money saver. maker. All easy, printed rules. Write factory for catalog, presses, type, paper, cards. **The Press Co., Meriden, Conn.**

STAMPS 100 all different. Venezuela, Uruguay, Paraguay, Peru, Japan, Mexico, Cuba, Philippines, etc., and Album, 1000 **10c** **FINELY MIXED 20c;** 1000 hinges **5c.** Agents wanted, 50 per cent. **New List Free.**
C. A. Stegman, 5946 Cote Brilliante Ave., St. Louis, Mo.

THE WIZARD'S KNOT
A new and ingenious puzzle guaranteeing carloads of fun and entertainment. Price 50c. Sent **Free** for a list of 50 names and addresses to whom 10 or more sales are made. A superb **Christmas gift.** Beautifully finished in stained wood.
The Wizard's Knot Co., York, Pa.

Sure Profits!

You can start a business of your own—simple, certain and profitable in any locality, and with a trifling outlay for machinery!

Concrete Building Blocks are replacing brick, stone and lumber everywhere, because more durable, ornamental and cheaper. May be manufactured *anywhere*, at half the cost of brick, and yet pay the manufacturer a profit of one hundred per cent!

IDEAL Concrete Machines

assure a business of wonderful profits to any man, without the necessity of previous experience. One man can do all the work, starting the business on little capital, and on as small a scale as desired.

The Ideal Concrete Machine is simple, rapid and adaptable. Has no cogs, chains, wheels or gears to wear out, and will positively last a lifetime. Makes blocks with plain, tooled or ornamental face, or natural stone effect.

Write for catalogue and complete details of the most profitable and certainly successful business for the man with small capital. It's freely yours for the asking.

IDEAL CONCRETE MACHINERY CO.,
Dept. E , South Bend, Ind.

GAS ENGINE DETAILS.—A VALUABLE and fully illustrated article on this subject is contained in SUPPLEMENT No. **1292.** Price 10 cents. For sale by Munn & Co. and all newsdealers.

THE LEAVITT SIREN HORN
is an ideal Signal for use on Automobiles and Motorboats. The tone can be varied instantly from a soft hum to a voluminous blast that can be heard for miles. The mechanical part of the horn is made from Aluminum and is furnished with a brass horn 8 inches in diameter. A large horn is necessary to concentrate the sound and throw it forward, as without it, the sound would not carry more than a few yards. We furnish all attachments complete. **Price, $35.**
THE UNCAS SPECIALTY CO.
Norwich, Conn.

SENSITIVE LABORATORY BALANCE. By N. Monroe Hopkins. This "built-up" laboratory balance will weigh up to one pound and will turn with a quarter of a postage stamp. The balance can be made by any amateur skilled in the use of tools, and it will work as well as a $125 balance. The article is accompanied by detailed working drawings showing various stages of the work. This article is contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1184.** Price 10 cents For sale by MUNN & CO., 361 Broadway, New York City, or any bookseller or newsdealer.

Rubber Elevator & Conveyor Belting

FOR CONVEYING AND LIFTING BROKEN STONES, COAL, COKE, WOOD PULP, GRAVEL, SAND, SUGAR, etc., etc.

SPECIAL CONSTRUCTION
EXCEPTIONAL QUALITY

NEW YORK BELTING & PACKING CO., Ltd.

91-93 CHAMBERS STREET, NEW YORK

SEND $1.00 NOW
FOR OUR NEW AMERICAN BOOK

How To Make Alcohol

and De-Nature it, from Farm Products, for use in Farm Engines, Automobiles, Heating and Lighting. Complete instructions. Stills illustrated. New Free Alcohol Law and Government Regulations.

SPON & CHAMBERLAIN
123 S. A. Liberty Street - NEW YORK

CHARTER

Stationaries, Portables, Hoisters, Pumpers, Sawing and Boat Outfits, Combined with Dynamos.

Gasoline, Gas, Kerosene.
Send for Catalogue.
State Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

LEARN TO BE A WATCHMAKER

Bradley Polytechnic Institute
Horological Department
Peoria, Illinois
Formerly Parsons Horological Inst.
Largest and Best Watch School in America

We teach Watch Work, Jewelry, Engraving, Clock Work, Optics. Tuition reasonable. Board and rooms near school at moderate rates. Send for Catalog of Information.

Calendar Watch

(Cut two-thirds size)

Registers the **Second, Minute, Hour, Day of Week, Date of Month, and Phases of Moon.** Changes Automatically. Stem-wind and set; jewelled pivot holes; expansion balance; accurate and reliable; richly decorated dial

Price, $7.45

Refunded if not as represented. Express Prepaid if remittance comes with order. Two or more, **$7 each.** References: Com. Agencies, N. Y. Banks, or any Express Co. Fine Holiday Gift.

Delihart Makers & Traders, Ltd., 150 Fifth Ave., New York

Bausch & Lomb Photographic Lenses . . . .

We believe the readers of this paper are interested in fine lenses for photographing machinery, interiors of shops, copying drawings, prints, etc., and for difficult out of door work, such as photographing manufacturing plants and other properties. That is why we suggest the

Bausch & Lomb-Zeiss Protar Lens, Ser. VII a.

This lens is so perfect that it will do any kind of work. It takes the place of the several lenses usually required in industrial photography. Catalog of lenses on request.

Bausch & Lomb Opt. Co., Rochester, N. Y.

NEW YORK BOSTON WASHINGTON
CHICAGO SAN FRANCISCO

The famous Calculating Machine. Enthusiastically endorsed the world over. Rapid, accurate, simple, durable. Two models: oxidized copper finish, $5.00; oxidized silver finish, with case, $10.00, prepaid in U. S. Write for **Free Booklet and Special Offer.** Agents wanted.

C. E. LOCKE M'F'G CO., 25 Walnut St. Kensett, Iowa

The Kahn System of Reinforced Concrete

combines architectural possibilities of the highest order with all the practical requirements of any structure from a million-dollar Marlborough-Blenheim hotel (here illustrated) to office and public buildings, warehouses, factories, or any form of construction where beams and columns are used.

The Kahn System is based upon the Kahn Trussed Bar which, when imbedded in concrete, gives the most scientific, economical and thorough reinforcement obtainable. Buildings erected by this System are monolithic in type, impervious to fire and the ravages of time.

The Kahn System insures economy in design through the experience of our Engineering Department and minimum cost of installation through the use of the Kahn Trussed Bar which is shop prepared, thus eliminating much expensive field labor, and making possible a speed in erection never before attained in structural work.

Detailed information and interesting literature sent on request. If request is written on your business letter head, we will send you the "Trussed Concrete Bulletin" one year free of charge.

TRUSSED CONCRETE STEEL CO.
22 W Congress Street
LONDON **DETROIT** TORONTO

STEAM USERS

Rainbow Packing

The original and only genuine red sheet packing.

The only effective and most economical flange packing in existence.

Can't blow Rainbow out.

For steam, air, hot or cold water, acid and ammonia joints.

Beware of imitations.

Look for the trade mark—the word Rainbow in a diamond in black, three rows of which extend the full length of each roll.

Manufactured exclusively by
PEERLESS RUBBER MFG. CO.
16 Warren St., New York

TOOL KNOWLEDGE CHEAP

In fact you can have it **free!** This cut represents our new **Tool Catalogue No. 22.** It is cloth-bound and contains 950 pages **all about Tools.** Full descriptions and thousands of illustrations. Sent post-paid on receipt of $1.00 which is refunded on your first purchase from us of $10.00 or over

MONTGOMERY & CO.
105 Fulton St., N. Y. City

---

is the ideal combination of the Oriental Narghile without its clumsiness, and the Occidental pipe without its injurious effects on the health of the smoker. The Turkish Water Pipe affords the healthiest smoke as proved by the proverbial longevity of the Turks. *The famous Turco-American Glass Pipe is a portable pipe with all the health comforts of the Narghile and the ever-readiness of the every day pipe.*

Through its clear non-breakable glass bowl you can see every wreath of smoke, in itself the greatest delight to the fastidious pipe smoker. The nicotine is segregated absolutely in the bottom of the bowl. **Thus the Turco-American Pipe assures a delightfully dry, clear, clean smoke. No biting the tongue, no wet tobacco remnants to throw away as every bit of tobacco in the pipe is consumed to a clear white ash.** Smoke it a week, and you will be so attached to it that you would not part with it for many times the amount of its cost. But if not entirely satisfactory in every respect, return it and we will send back your money. Straight or drop stems. Price $1.50, postpaid in United States and Canada. Foreign countries add postage. Reference: National Bank of Commerce. *Booklet for the asking.*

The Turco-American Pipe Co., 216 South Ave., Rochester, N.Y.

SUN INCANDESCENT GASOLINE LAMP
Ninth Year of Success. Finest white light at least cost. Absolutely satisfactory in homes, churches, schools, etc. Many styles. Saves money and eyesight. No wick, odor, dirt, bother. Agents coining money. Get catalogue. Get up club—special discount.
THE "SUN" OUTSHINES THEM ALL
Sun Vapor Light Co., Box 109, Canton, Ohio.

Are You In On This Combination?

It's organized on the square with an extra center head equipment. It's a real Carpenter's Combination Square. Well made, well finished, and will stand the test for accuracy. It is indispensable for the carpenter's kit.

Send for catalogue.

GOODELL-PRATT COMPANY Greenfield, Mass.

YOUR OWN ELECTRIC LIGHT PLANT.

We have Standard Complete Outfits for any size place, summer homes, residences, launches, yachts, etc. Every detail included; very best material money can buy; thoroughly practical; so simple no electrician required. **Light all the time** with our Storage Battery Outfits. **Gas, Gasoline, Kerosene** or **Steam** engines used give plenty of power for pumping water, sawing wood, refrigeration, etc.

For latest printed matter covering over a hundred outfits address
ELECTRIC DEPARTMENT

RICHARDSON ENGINEERING CO. HARTFORD, CONN.

THE NATIONAL INVERTED GAS LAMP

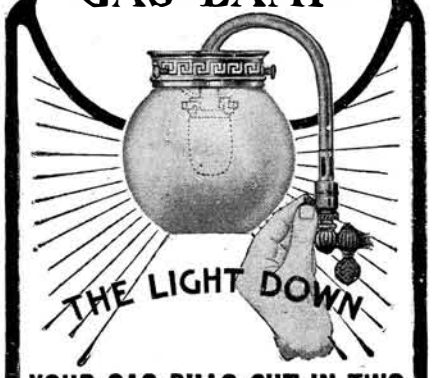

YOUR GAS BILLS CUT IN TWO

You are using more gas than you need;
You are breaking too many globes;
You are wasting too many mantles;

because the pressure forces more gas through the pipes than is necessary to give you a good steady light.

THE **NATIONAL AUTOMATIC** GAS LIGHT (Inverted) has an **AUTOMATIC REGULATOR** which controls this pressure and allows *just enough* gas (not too much or too little) to pass through at all times to make a perfect light which prevents the wasting of gas, breaking of globes and mantles and the destruction of the burners.

SAVES GAS, GLOBES AND MANTLES

THE NATIONAL AUTOMATIC GAS LIGHT gives a steady light downward of *twice* the candle power and at *half the cost* of any other light and 5 times the light at 1-5 *the cost* of electricity.

An Inverted Light to be a success must have *Automatic* control of gas.

The National is the only light with an *Automatic Regulator.*

It is the only light that is sold under a positive guarantee to do what we claim or money refunded.



Automatic Regulator, the device that makes the Inverted Light a success.

Try One on Two Weeks' Free Trial

Under our guarantee you take no risk.

Fit out your house, store, office or factory to-day with National Automatic Gas Lights and save one-half your lighting bills. Any dealer in lighting devices can supply you with the National.

Price $1.75 boxed complete

Send direct for Free booklet "*Seven Stages in Lighting,*" which explains how and why the National Automatic Gas Light (Inverted) gives twice the light for half the gas bill.

THE NATIONAL GAS LIGHT CO.
1211 Porter Street Kalamazoo, Mich.

Insist on getting the National—accept no other. The words "*National Automatic*" stamped on every regulator.

You can see the *pin point jump* when the gas is turned on. Look for these features before purchasing.

COLD GALVANIZING.
AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.

Established 1820.



NICKEL AND Electro-Plating Apparatus and Material.
THE Hanson & Van Winkle Co.,
Newark, N. J.
28 & 30 S. Canal St. Chicago.

On the Back of the Button insures Permanent Satisfaction. It cannot break from service. The shape of the head makes it

1. Easy to button.
2. When buttoned it stays buttoned.
3. Easy to unbutton.

Sold by Jewelers and Haberdashers. Write for booklet: The Story of a Collar Button.

KREMENTZ & CO., 77 Chestnut St., Newark, N.J.

Gives You All the Benefit

of the coal you burn, If you have a stove which does not thoroughly heat the room in which it is placed, get a

New Era Radiator

It will catch all the heat which is now going up the chimney and thoroughly radiate it throughout the room. Fits any pipe and saves one-half your present coal bills. It will pay you to ask your dealer, or write direct for full particulars to

WILMOT CASTLE CO.
17 A Elm Street
Rochester, N. Y.

ELECTRICAL NOVELTIES



Model Electric Railways
Motors and Dynamos,
Track, Switches, Bridges, Etc.

Send for Catalogue B. Perfect Working Models.

The Carlisle & Finch Co., 233 East Clifton Ave., Cincinnati, O.

HELMET OIL LUBRICATES ANYTHING.
IF YOU HAVE A HOT BOX TRY IT. C. H. BESLY & CO. CHICAGO, ILL. U.S.A.
15 to 21 South Clinton Street.

If you want comfort, you must buy a Franklin

You can't get comfort in a car with half-elliptic springs or metal frame. It magnifies inequalities into bumps; turns car-tracks into jolts; and makes the average road a continuous strain.

Franklin wood-sills with Franklin full-elliptic spring suspension neutralize these inevitable shocks, and give a comfort that makes motoring the complete pleasure that it ought to be.

Part of Franklin comfort is absence of trouble. Light weight—avoids tire-trouble. Air-cooled—no freezing troubles.

Why don't you send for Whitman's story "Across America in a Franklin"? We want you to have it; also catalogue.

Shaft-drive Runabout	**$1800**	**4-cylinder Touring-car**	**$2800**
4-cylinder Light Touring-car	**$1850**	**6-cylinder Touring-car**	**$4000**

Prices in standard colors and equipment f. o. b. Syracuse.
Special upholstery, equipment and colors extra.

H. H. FRANKLIN MFG. CO., Syracuse, N. Y.
M. A. L. A. M.

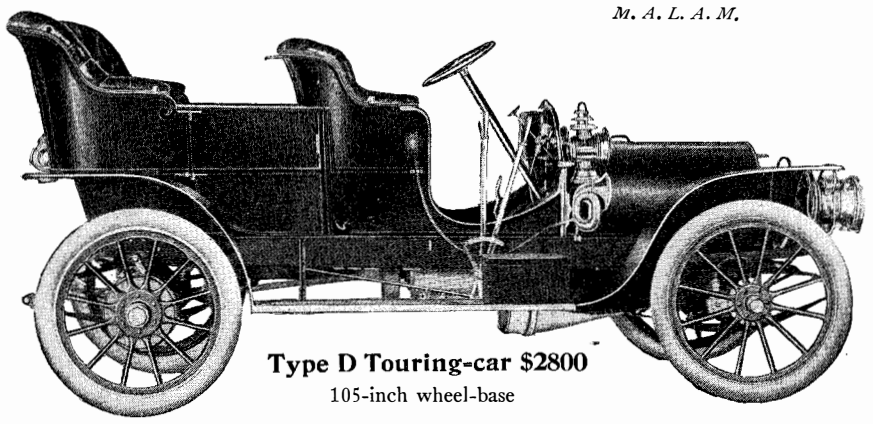

Type D Touring-car $2800
105-inch wheel-base

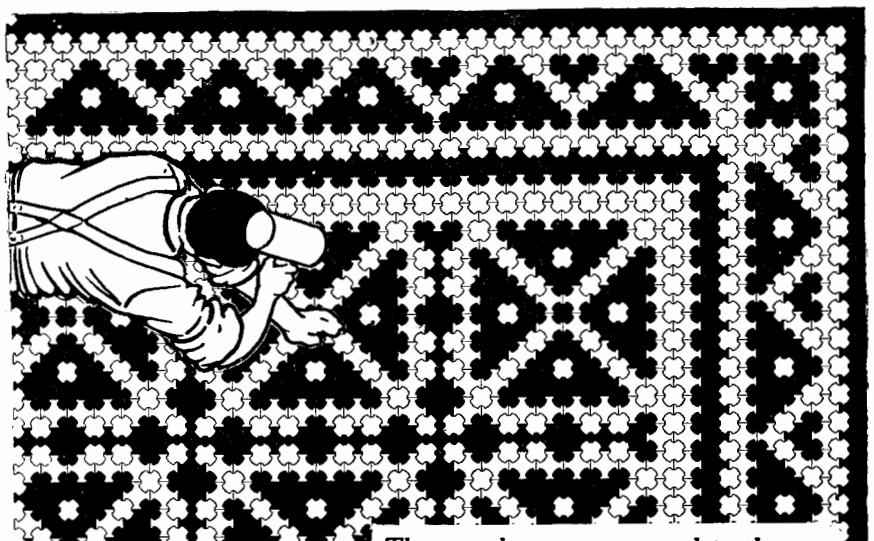

These workmen are engaged in the very simple operation of laying a floor of

Pennsylvania Interlocking Rubber Tiling

the most elegant, durable and satisfactory flooring material made. This shows one of the beautiful designs of this tiling, of which there is almost infinite variety, and the manner in which it is executed.

The blocks are made up in the factory according to the desired design. This design is then shipped in sections of convenient size, and merely put together compactly over the space to be covered. Hammering to even the faces of the tiles completes the floor. And what a floor it is! Incomparable in elegance, silent, agreeable under foot and non-slippery; thoroughly water-proof, affording not the slightest crevice for the accumulation of germs or filth, non-inflammable and odorless. It never shows wear under the heaviest foot traffic, but is more durable even than marble.

PENNSYLVANIA RUBBER TILING
should be specified for public buildings, court rooms, hospitals, hotels, banks, offices, stores, and wherever its peculiar points of superiority recommend it.

OUR BOOK-OF-DESIGNS-IN-COLOR
with detailed information regarding Pennsylvania Rubber Tiling, should be in the hands of all architects and builders. Mailed Free on request.

PENNSYLVANIA RUBBER COMPANY
JEANNETTE, PA.

NEW YORK 1741 Broadway CHICAGO, 1241 Michigan Avenue BOSTON, 20 Park Square BUFFALO, 117 Main Street
ATLANTA, 102 N. Pryor Street PHILADELPHIA, 615 N. Broad Street LONDON, 4 Snow Hill

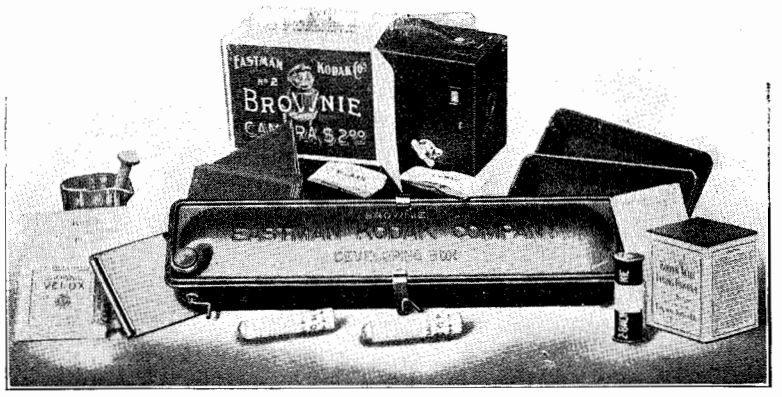

For every boy and girl there's a Merry Christmas in the

Kodak Box

A No. 2 Brownie Camera for taking 2¼ x 3¼ pictures, a Brownie Developing Box for developing the negative *in daylight*, Film, Velox paper, Chemicals, Trays, Mounts—Everything needed for making pictures is included in this complete little outfit.

And the working of it is so simple that anybody can get good results from the start. No dark-room is needed and every step is explained in the illustrated instruction book that accompanies every outfit.

Made by Kodak workmen in the Kodak factory—that tells the story of the quality.

THE KODAK BOX No. 2, CONTAINING:

1 No. 2 Brownie Camera,	$2.00	1 No. 2 Brownie Printing Frame,	$ .15
1 Brownie Developing Box,	1.00	1 Doz. 2¼ x 3¼ Brownie Velox,	.15
1 Roll No. 2 Brownie Film, 6 ex.,	.20	2 Eastman M. Q. Developing Tubes,	.10
2 Brownie Developing Powders,	.05	3 Paper Developing Trays,	.30
1 Pkg. Kodak Acid Fixing Powder,	.15	1 Doz. 2¼ x 3¼ Duplex Mounts,	.05
1 Four-oz. Graduate,	.10	1 Doz. Kodak Dry Mounting Tissue,	.05
1 Stirring Rod,	.05	1 Instruction Book,	.10
			$4.45

$4.00 Price, Complete At all Kodak Dealers **$4.00**

EASTMAN KODAK CO.

Write for Booklet of the Kodak Box. Rochester, N. Y., *The Kodak City.*

CUMULATIVE EVIDENCE PROVES THE

OLDSMOBILE

the car that does things—the car for any exploit—for touring, for hill climbing, for general utility.

The Oldsmobile, Model "A," Touring Car for 1907—a thoroughly tested car, built along the successful lines of Model "S" for 1906, but with greater horse power, greater capacity and more finished qualities.

The conclusive evidence of the capacity of these cars continues to accumulate. Can you get away from the following convincing facts?

The Hill Climbing Ability, again demonstrated by the recent record climb up Twin Peaks, San Francisco. Here Model "A" not only sets a new mark of 2 minutes 29 seconds, cutting 1 minute 1 second from the record, but was the first and only car to ever make the run to the highest apex.

Motor Endurance, again demonstrated on November 20 at Cleveland, when Model "A" completed a 100-hour non-stop run. A copy of sworn statements giving details of this run will be sent to those interested on request.

Touring Quality, demonstrated on the 350-mile non-stop run made by Model "A" from Detroit, Mich., to Cincinnati, O., in 14 hours and 12 minutes, actual running time. This run was made on the high gear. When Cincinnati was reached the car was driven to the top of Vine Street Hill, still on the high gear. The car which made this remarkable demonstration of touring and hill-climbing ability was taken fresh from the factory and represented the average run of stock cars.

Touring Quality, demonstrated by the perfect score made on the Glidden Tour in competition with cars costing more than double its price.

To prove how well the car had withstood the strain of the Glidden Tour, the same car was driven from Bretton Woods, N. H., to New York City without any adjustment or alteration, making a non-stop run of 595 miles through mud and rain in the record time of 21 hours and 30 minutes actual running time, under the official observation of the A. A. A. committee.

Roadability, demonstrated by the 75-mile run from New York to Poughkeepsie over difficult hills and trying road conditions with the high speed lever sealed in. Also in the Santa Barbara, California, run, and the St. Catharines to Toronto, Canada, high-speed-lever-sealed-in run.

The Oldsmobile, Model "A," Touring Car for 1907, has 35-40 H. P. Four-Cylinder Motor. Cylinders 4½ x 4¾ ground and polished by special machinery. Pistons ground into cylinders with powdered glass. Wheels with special spoke design are 34 x 4 inches rear, and 34 x 3½ inches front. Springs 2¼ x 36 inches front and 3¼ x 52 inches rear make the car wonderfully well-balanced and easy riding. Wheel base is 106½ inches. Complete specifications sent on request. Price $2750.

If you are an Oldsmobile owner, send us your name, address, number of motor and date of purchase, and we will send you regularly the Oldsmobile News Letter, a weekly publication devoted to the interest of Oldsmobile enthusiasts. For further reasons address Dept. S. A.

In New York we shall exhibit in Madison Square Garden Show only. Space No. 8, January 12-19, 1907.

OLDS MOTOR WORKS
Member A. L. A. M.
Lansing, Mich., U. S. A.

In Chicago we shall exhibit at the Coliseum. Space B1, February 2-9, 1907.

DR. SIMON NEWCOMB.

PRESIDENT R. S. WOODWARD, OF CARNEGIE INSTITUTION.

FREDERICK CONVERSE BEACH. (Editor in Chief.)

GEORGE EDWIN RINES. (Managing Editor.)

PRESIDENT ARTHUR T. HADLEY, OF YALE.

PRESIDENT DAVID S. JORDAN, OF STANFORD.

HON. JOSEPH H. CHOATE.

Copyright, 1903, by J. E. Purdy
PRESIDENT BENJ. IDE WHEELER, OF CALIFORNIA.



PROF. CASSIUS J. KEYSER, OF COLUMBIA, (Department of Mathematics.)

ANDREW S. DRAPER, NEW YORK STATE COMMISSIONER OF EDUCATION. (Department of Education.)

16 **VOLS.**

The Most Magnificent, Scholarly, Original, Practical System of Reference in Existence

The AMERICANA

Published Under the Editorial Supervision of

The SCIENTIFIC AMERICAN

The AMERICANA is a distinctly American work. It has not been built upon a foreign foundation.

The AMERICANA is the *only* one which presents a *development* of each *department* of knowledge.

The AMERICANA contains thousands of strikingly beautiful colored plates and photogravures which embellish and illustrate the text.

"TAKEN all in all we have no hesitation in saying that this great American production, in the extent and usefulness of its contents, in its technical arrangement, in its original conception and brilliant performance, is without a peer."—*Review of Reviews.*

Some idea of the magnitude of this work may be gained from the fact that it required an investment of more than **$1,500,000** to produce it.

Over Two Thousand Special Contributors

Comprising the greatest living American scholars and authorities.



EDWARD EVERETT HALE.

CARDINAL GIBBONS.

PROF. J. E. CREIGHTON, OF CORNELL. (Department of Philosophy.)

Copyright, 1902, by J. E. Purdy
THOMAS W. HIGGINSON.

FREE ON REQUEST

No mere advertisement can convey an adequate idea of the vast interest and immense utility of the AMERICANA, or of its exceptional value and sumptuous appearance. Let us send you therefore a handsome **120-page book** containing **specimen pages, maps, full-page plates, duo-tones, color plates, and text illustrations,** with **portraits of celebrities,** full-page photographic plates **of the most interesting and up-to-date subjects — The Americana being the best illustrated of all reference works.** With the object of making the AMERICANA quickly and widely known, before placing the work in the hands of dealers for general distribution, we will accept orders direct at a large reduction from the established price. Those interested are requested to made application immediately. The work is sold exclusively in connection with the **SCIENTIFIC AMERICAN,** and cannot be otherwise obtained.

REQUEST BLANK

SCIENTIFIC AMERICAN COMPILING DEPT.
258 FIFTH AVENUE, NEW YORK CITY

Without obligating myself to purchase I would like to receive FREE, your 120-page Book of Specimen Pages, Maps, Duo tones, Color Plates, Portraits, etc., of the NEW AMERICANA, with particulars of your special low price advertising proposition :

Name.....

Occupation. .....

Street.....

Town and State.....

CUT OUT AND MAIL TO-DAY

AMERICAN COLORTYPE CO., N. Y. & CHI.